



FILE NO.

SERVICE MANUAL Colour Television

Model No. C20LB98M

(Argentina)

Service Ref. No. C20LB98M-00

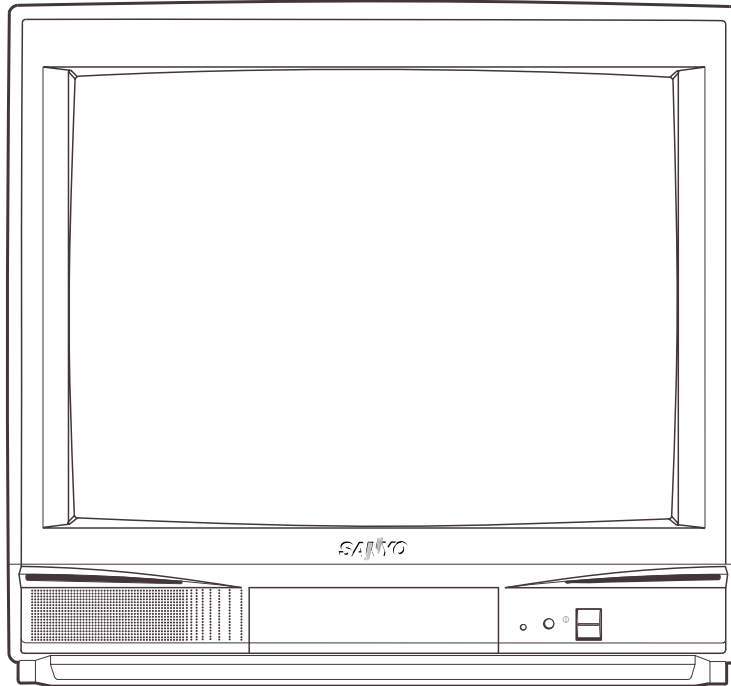

Specifications

Power Source AC220V, 50Hz / 60Hz
 Receiving System PAL (M/M, N/N), NTSC (M/M)
 Channel Coverage
 Antenna mode VHF: CH02-CH13, UHF: CH14-CH69
 CATV mode VHF band: CH01-CH13, Mid band: CH14-CH22
 Super band: CH23-CH36, Hyper band: CH37-CH64
 Ultra band: CH65-CH94 and CH100-CH125
 Low mid band: CH95-CH99
 Video IF 45.75MHz
 Aerial Input Impedance . . 75Ω
 Ext. Terminals
 Video inputs: Phono jack X 2 (1Vp - p, 75Ω)
 Audio inputs: Phono jack X 2 (436mVrms, more than 40KΩ)
 Sound Output (RMS) 2W
 Speakers 5 cm x 9 cm x 1 pc.
 Dimensions 496 (W) X 464 (H) X 472 (D)mm
 Weight approx. 16.7 Kg

Specifications subject to change without notice.

Product Code: 111342115

Original Version

Chassis Series: LA5-A

Give complete "SERVICE REF. NO." for parts order or servicing. It is shown on the rating plate at the cabinet back of the unit.

This T.V. receiver will not work properly in foreign countries where the television transmission system and power source differ from the design specifications. Refer to the specification table.

Contents

Safety Notice	2
Chassis Block Diagram	3-4
IC Block Diagrams	5-7
Service Adjustments	8-14
Purity and Convergence Adjustment	15
Cabinet Parts List	16
Chassis Electrical Parts List	17-23

Safety Notice

SAFETY PRECAUTIONS

- 1: An isolation transformer should be connected in the power line between the receiver and the AC line when a service is performed on the primary of the converter transformer of the set.

2: Comply with all caution and safety-related notes provided on the cabinet back, inside the cabinet, on the chassis or the picture tube.
- 3: When replacing a chassis in the cabinet, always be certain that all the protective devices are installed properly, such as, control knobs, adjustment covers or shields, barriers, isolation resistor-capacitor networks etc.. Before returning any television to the customer, the service technician must be sure that it is completely safe to operate without danger of electrical shock.

X-RADIATION PRECAUTION


The primary source of X-RADIATION in television receiver is the picture tube. The picture tube is specially constructed to limit X-RADIATION emissions. For continued X-RADIATION protection, the replacement tube must be the same type as the original including suffix letter. Excessive high voltage may produce potentially hazardous X - RADIATION. To avoid such hazards, the high voltage must be maintained within specified limit. Refer to this service manual, high voltage adjustment for specific high voltage limit. If high voltage exceeds specified limits, take necessary corrective action. Carefully follow the instructions for + B1 volt power supply adjustment, and high voltage check to maintain the high voltage within the specified limits.

PRODUCT SAFETY NOTICE

Product safety should be considered when a component replacement is made in any area of a receiver. Components indicated by mark ⚠ in the parts list and the schematic diagram designate components in which safety can be of special significance. It is particularly recommended that only parts designated on the parts list in this manual be used for component replacement designated by mark ⚠ . No deviations from resistance wattage or voltage ratings may be made for replacement items designated by mark ⚠ .


Chassis Block Diagrams

MAIN SIGNAL PROCESSING CIRCUIT

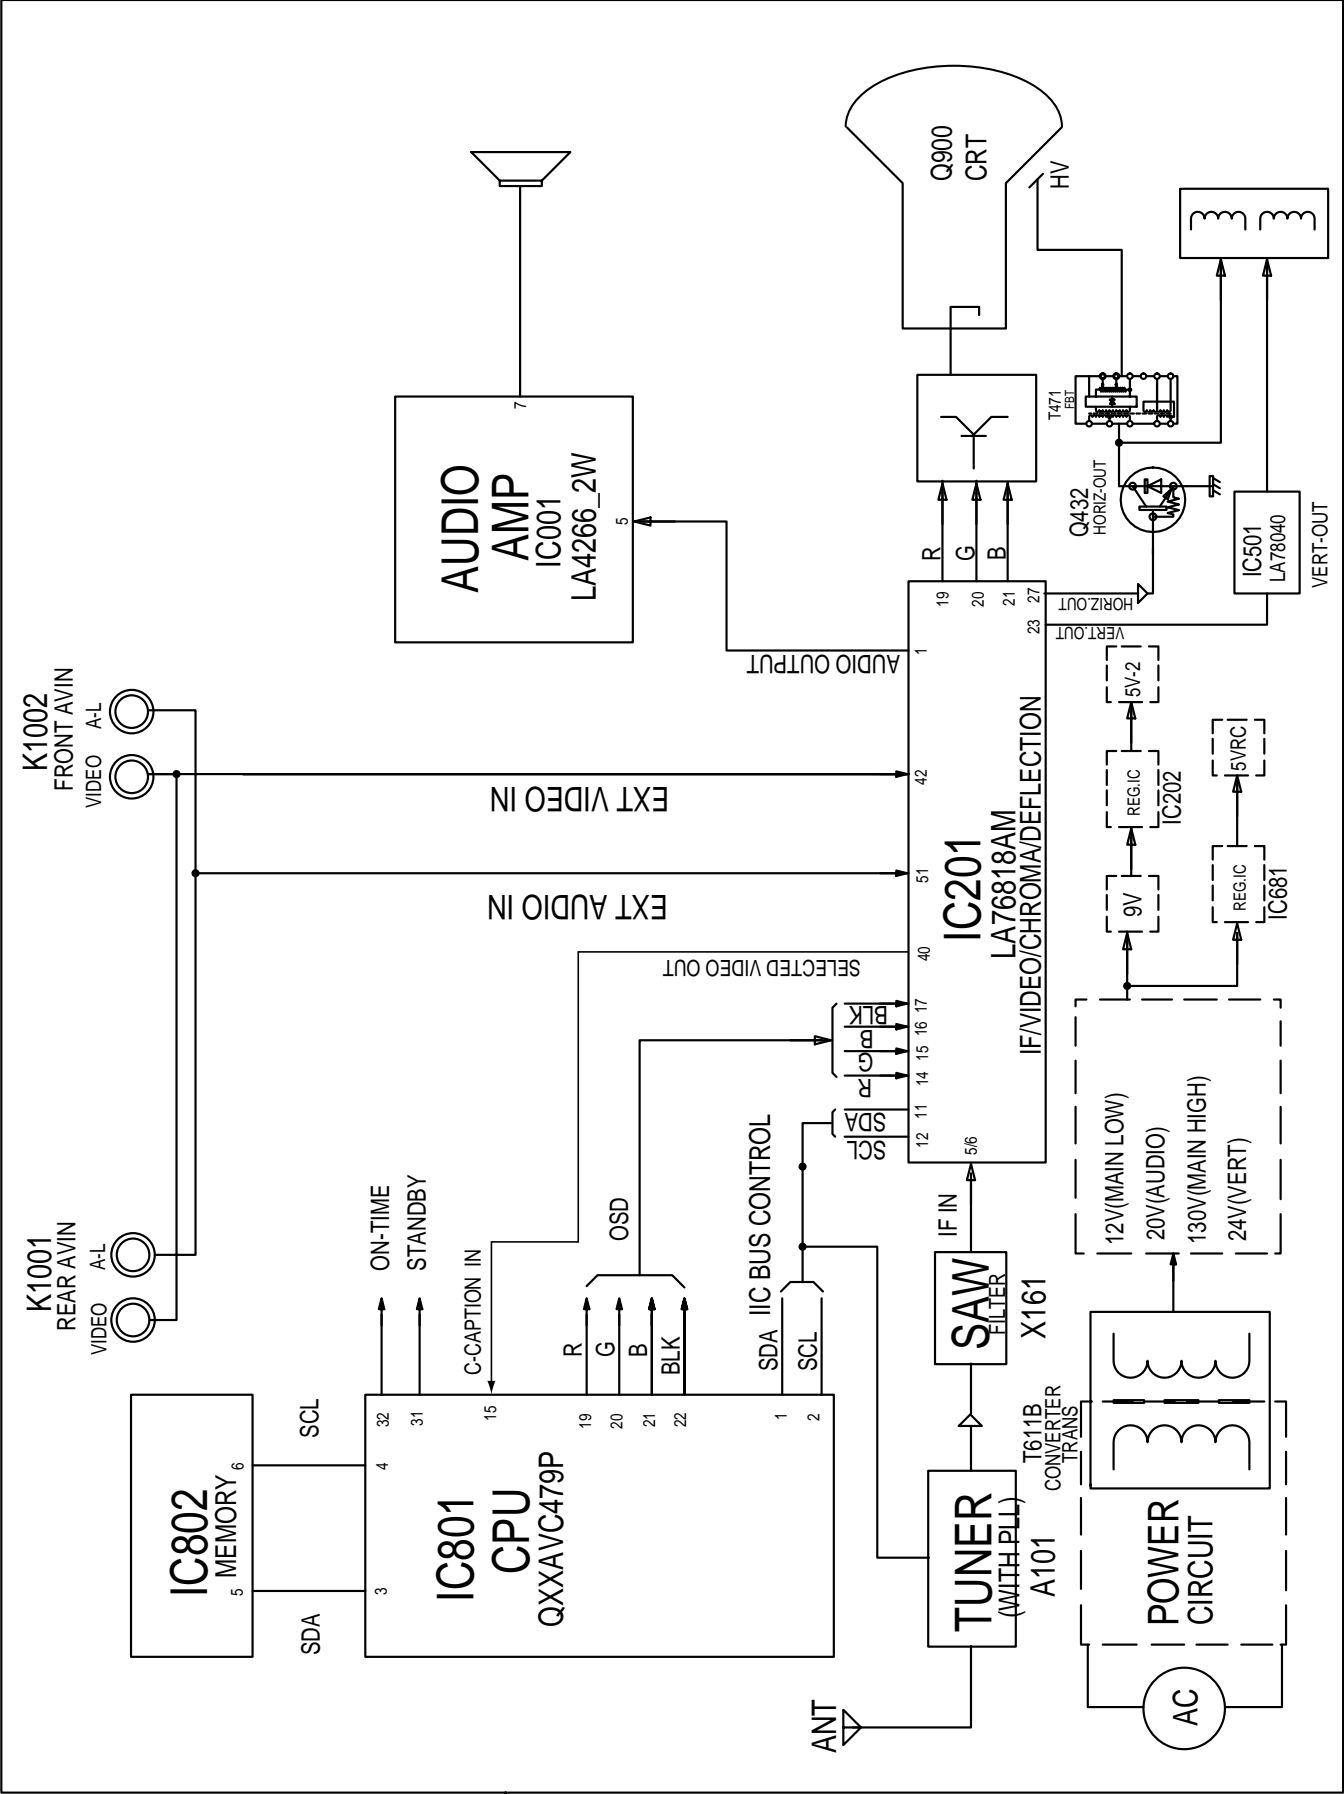


Chassis Block Diagrams

SYSTEM CONTROL

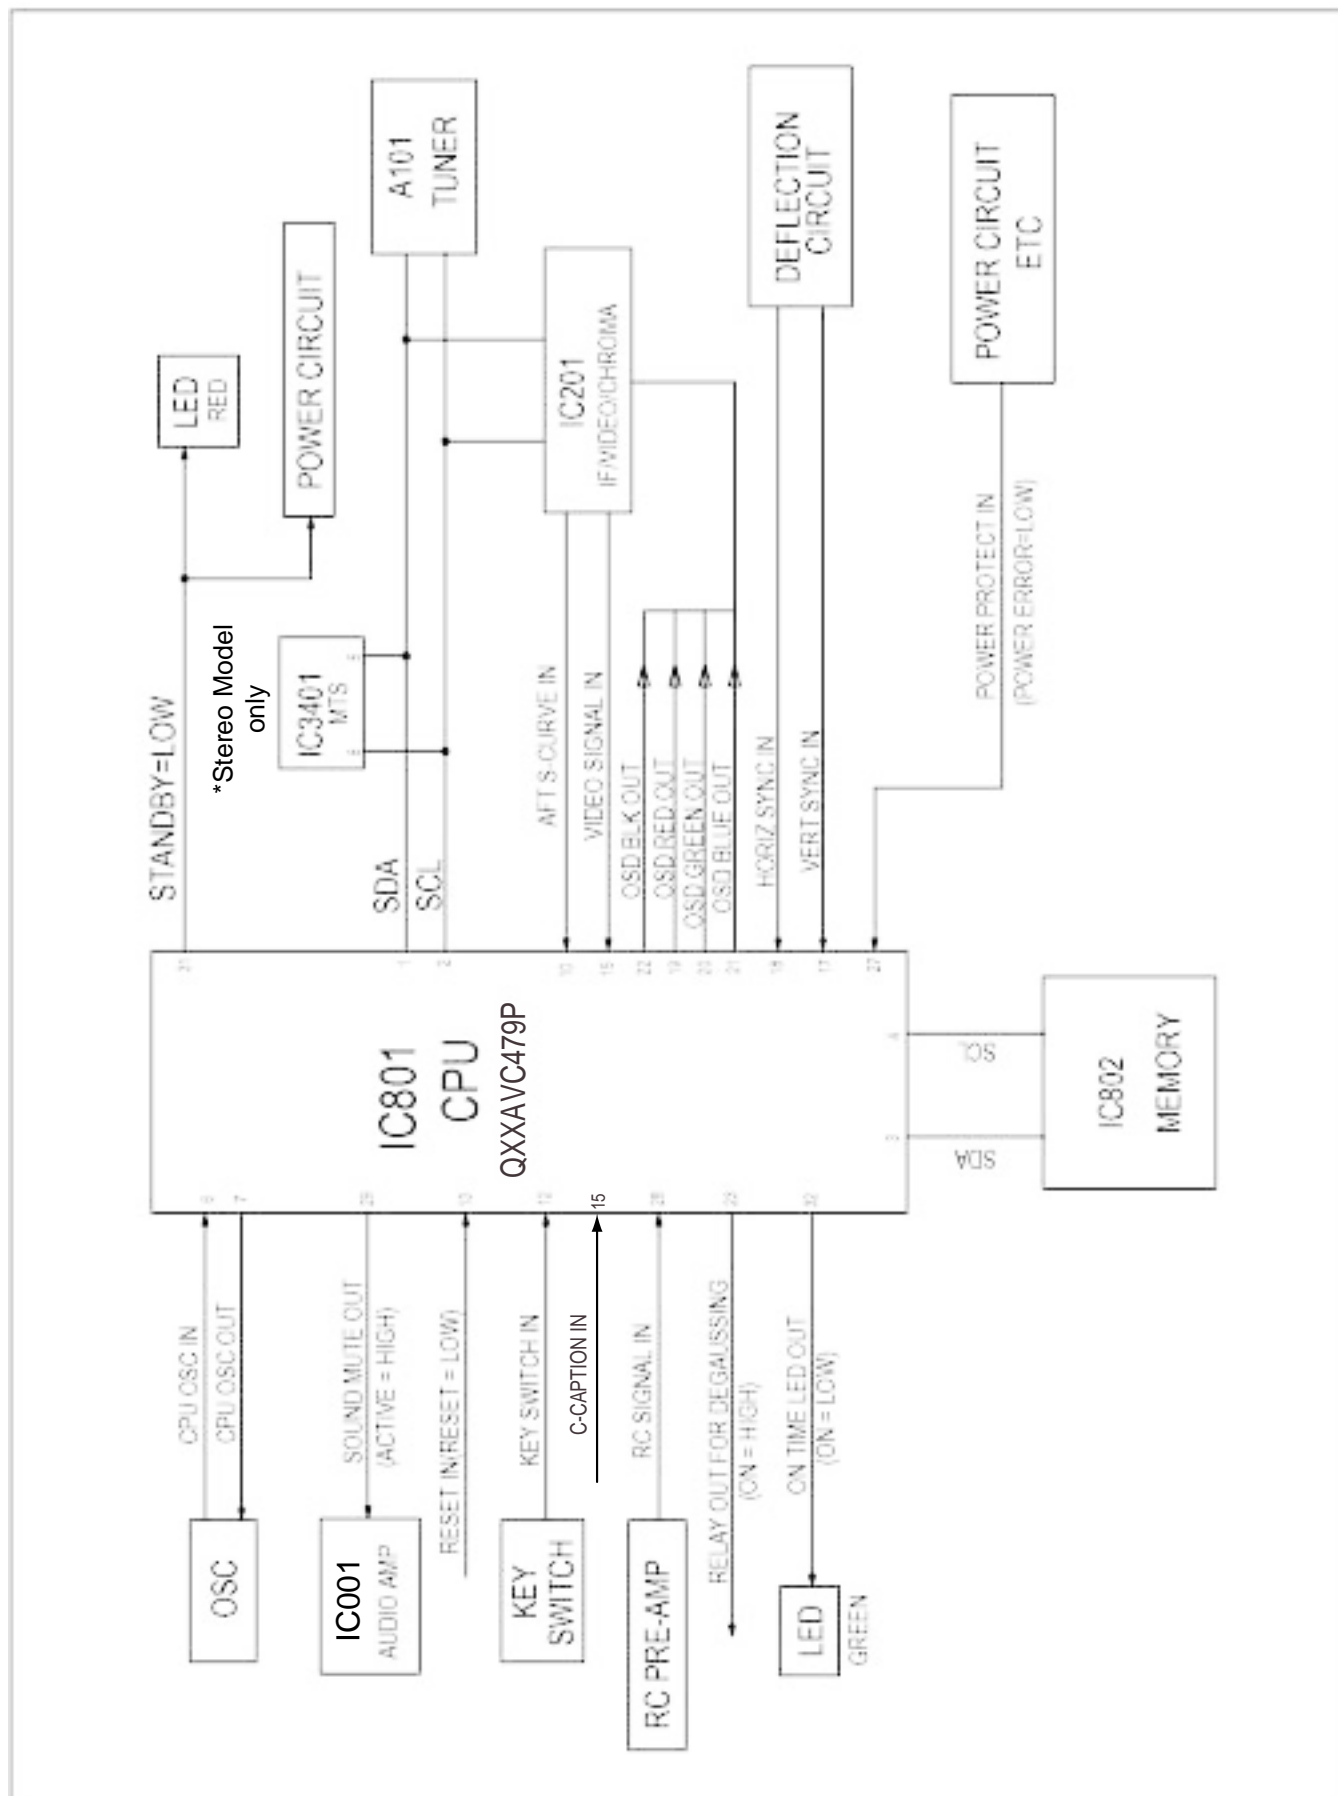


IC Block Diagrams

IC201 < IF/Video/Chroma/Def. > LA76818A

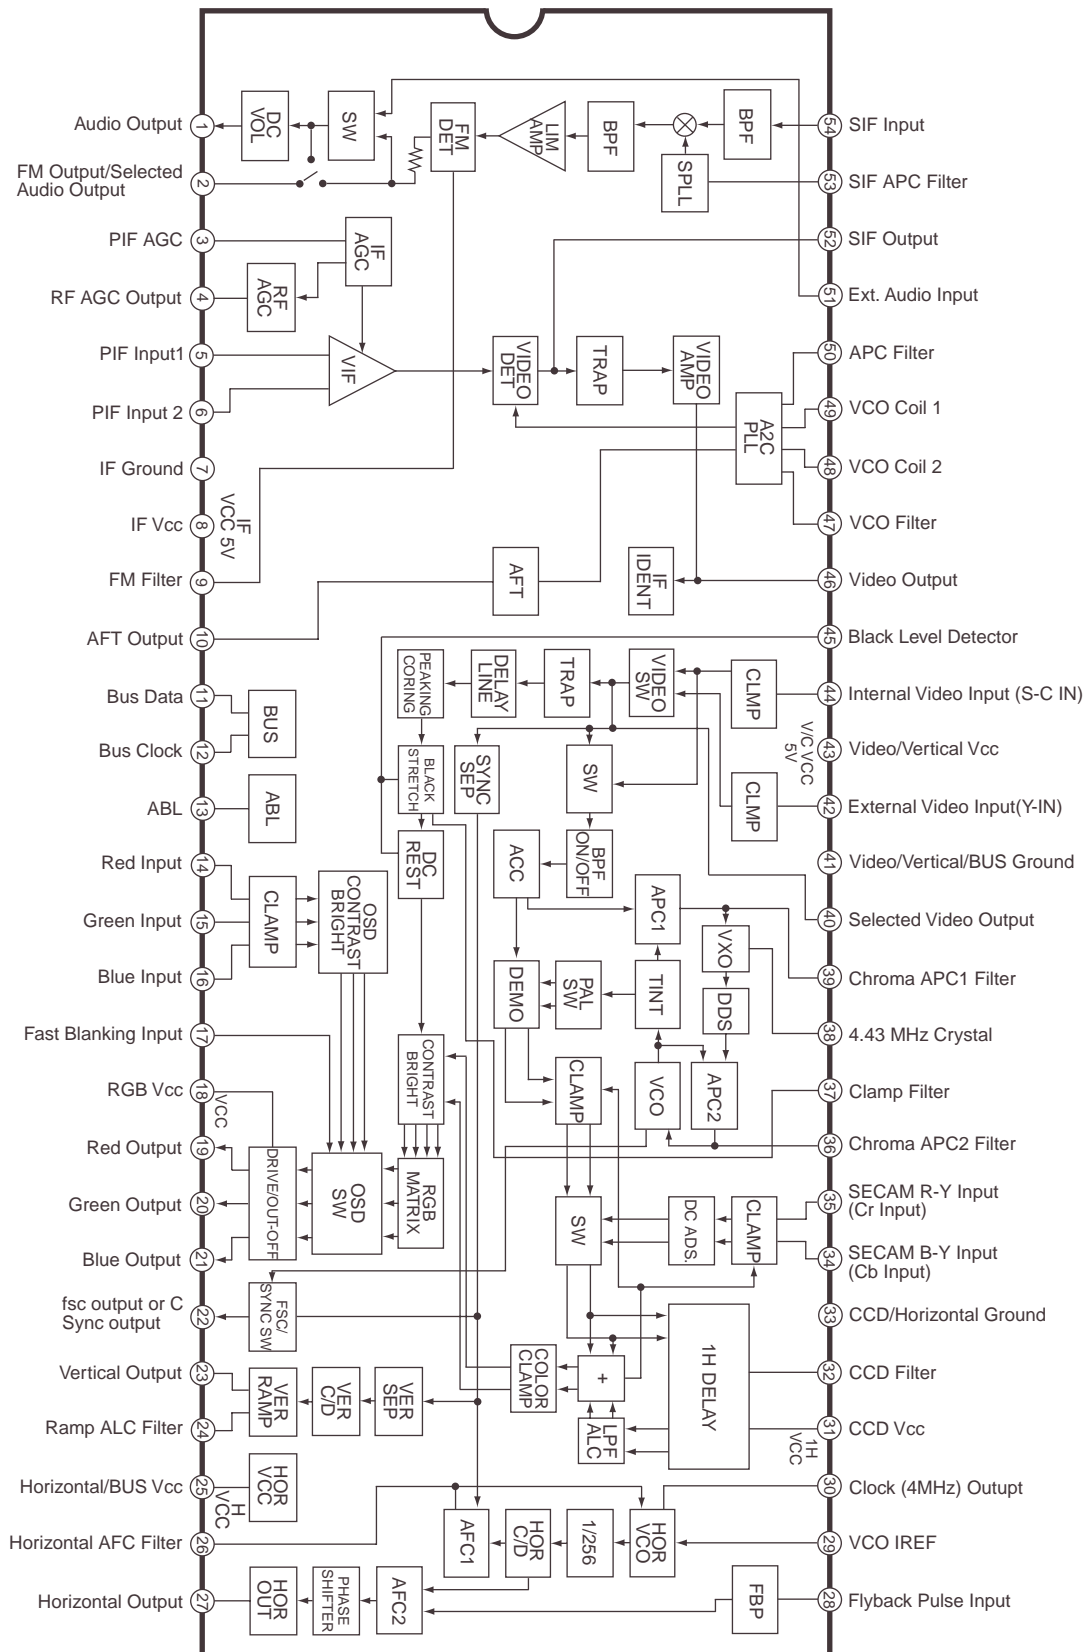


IC201 <IF System Block Diagram> LA76818A

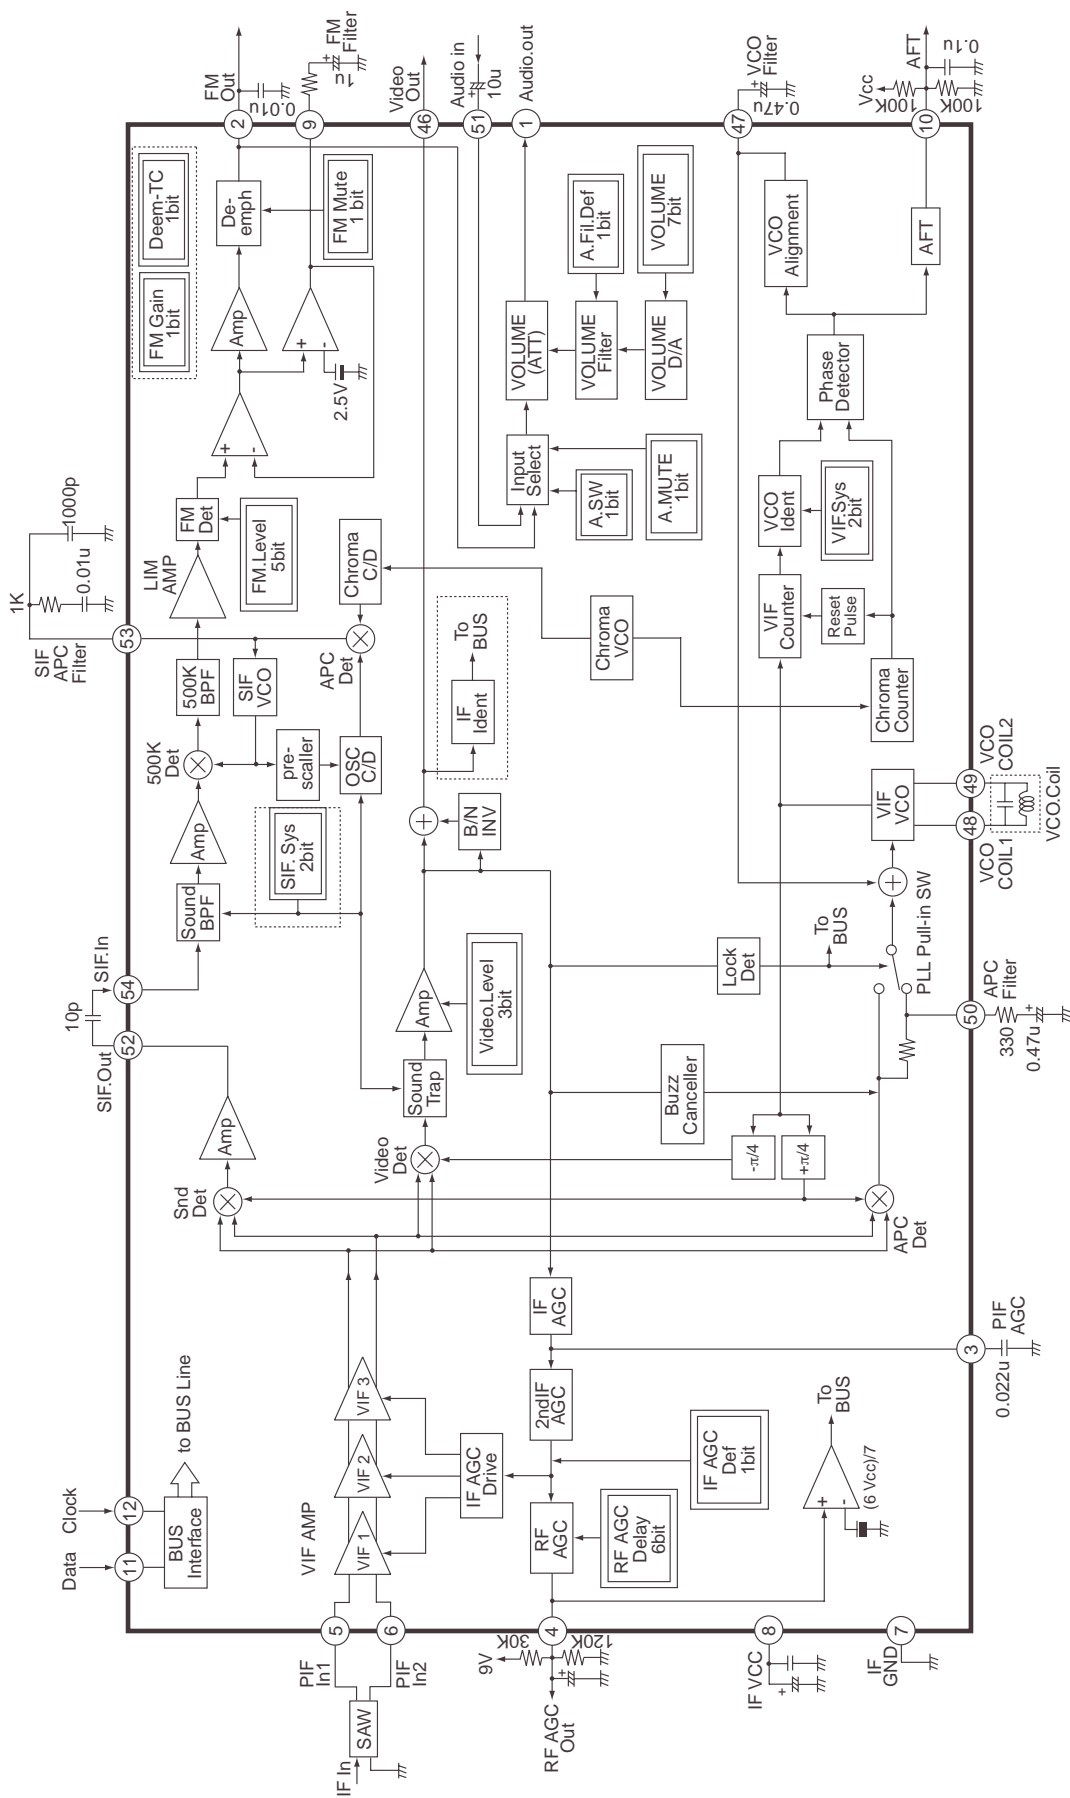


IC Block Diagrams

IC001 < Audio AMP. > LA42052-E

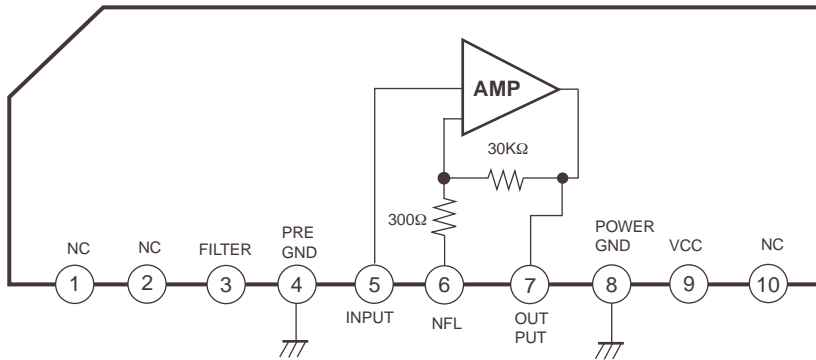

IC501 < Vertical Output > LA78040N, TDA9302H

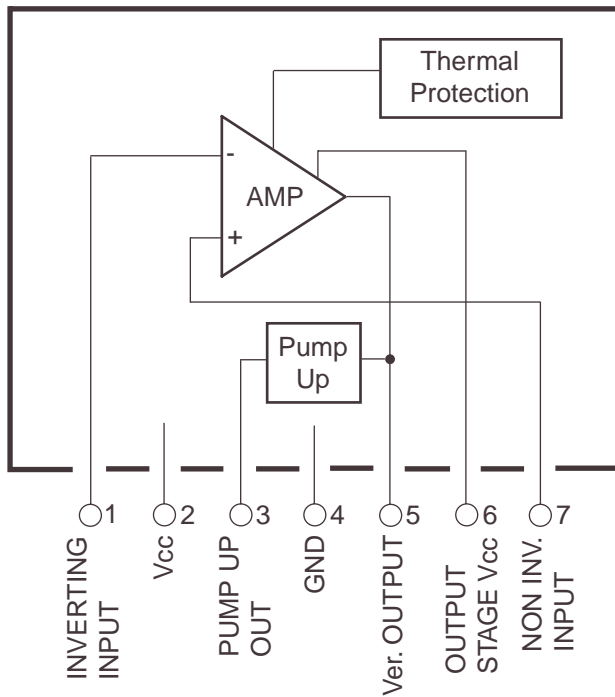

Service Adjustments


General

This set has an On-screen Service Menu system included in the CPU that allows remote operation for most of the service adjustments.

Service Adjustment-1

1. Enter the Service Menu

While pressing the **MENU** button on the television, press the Number Key **2** on the remote control unit. The Service Menu now appear.

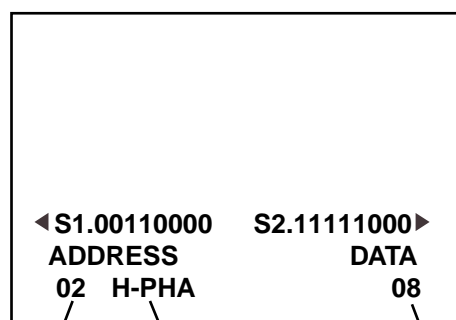


Item No.

Item

Data value

[Service Mode Display]

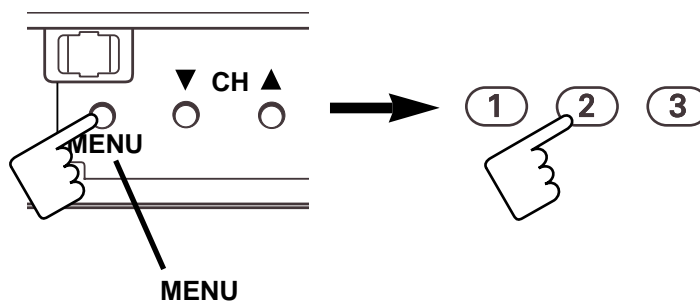


[Entering the Service Menu]

2. Service Adjustments:

Press the **CHANNEL UP** or **CHANNEL DOWN** button on the remote control handset to select the desired service menu item you want to adjust.

Use the **VOLUME +** or **-** to adjust the data. The **+** or **-** button will increase or decrease the data sequentially.

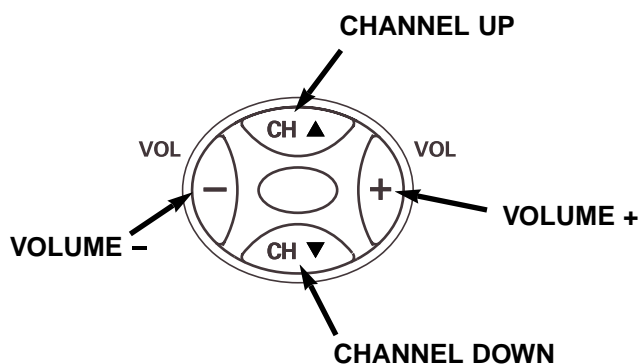


[Service Adjustment]

3. Exit from the Service Menu

Press the **MENU** button to turn off the Service Menu display.

The data which is set in the service mode is stored into the memory IC automatically.



[Exit from the Service Menu]

Service Adjustments

On-screen Service Menu

Following table shows the initial values which have been stored in the CPU ROM, and items for the service adjustments.

No.	Item	Initial value	Range	Description
01	RFAGC	06	00~63	RF AGC adjustment
02	H-PHA	08	00~31	H-PHASE adjustment (50Hz)
03	V-POS	32	00~63	Vertical position adjustment (50Hz)
04	V-SIZ	54	00~127	Vertical size adjustment (50Hz)
05	V-SCO	17	00~31	Vertical-S compensation (50Hz)
06	VLIN	15	00~31	Vertical linearity adjustment (50Hz)
07	H-P60	+4	-16~+15	Difference value of H-PHASE adjustment (60Hz)
08	V-P60	0	-32~+31	Difference value of V-POSITION adjustment (60Hz)
09	V-S60	+1	-64~+63	Difference value of V-SIZE adjustment (60Hz)
10	VSC60	0	-16~+15	Difference value of Vertical-S compensation (60Hz)
11	VLI60	+1	-16~+15	Difference value of Vertical linearity adjustment (60Hz)
12	OSDHP	30	01~255	OSD horizontal remark position
13	OSDC	50	00~127	OSD contrast
14	V-SCP	07	00~07	V-SIZE COMP (50Hz)
15	SBIAS	70	00~127	Sub Bias adjustment
16	RBIAS	00	00~255	Red Bias adjustment
17	GBIAS	00	00~255	Green Bias adjustment
18	BBIAS	00	00~255	Blue Bias adjustment
19	RDRIV	63	00~127	Red Drive adjustment
20	GDRIV	07	00~15	Green Drive adjustment
21	BDRIV	63	00~127	Blue Drive adjustment
22	- -	- -	- -	White balance (a lateral line)
23	DRV	- -	- -	Brightness and dark of White balance adjustment
24	B-YD	10	00~15	B-Y DC Level
25	R-YD	10	00~15	R-Y DC Level
26	B-YND	0	-16~+15	Difference value of NTSC B-Y DC Level
27	R-YND	0	-16~+15	Difference value of NTSC R-Y DC Level
28	G-YA	00	00,01	G-Y Angle
29	RBGB	08	00~15	R-Y/B-Y Gain Balance
30	RBAG	08	00~15	R-Y/B-Y Angle
31	G-YAN	00	00,01	Difference value of NTSC G-Y Angle
32	RBGBN	0	-8~+7	Difference value of NTSC R-Y/B-Y Gain Balance
33	RBABN	0	-8~+7	Difference value of NTSC R-Y/B-Y Angle
34	COGV	01	00~03	Coring gain
35	BLK	03	00~03	BLK. STR. Start (W/Defeat)
36	BLKG	03	00~03	BLK. STR. Gain
37	BRTA	00	00, 01	BRT. ABL Defeat
38	BRST	00	00, 01	Mid. Stp. Defeat
39	BRTH	00	00~07	Bright. ABL. Threshold
40	WPL	00	00~03	WPL Ope. Point (W/Defeat)
41	YGAM	00	00~03	Y Gamma Start
42	PORW	00	00, 01	AV Mode Pre/Over SW
43	PORS	02	00~03	AV Mode Pre/Over-shoot adjustment
44	RFCO	0	00~03	Difference Value of RF Corring Gain
45	PORWN	01	00, 01	RF Pre/Over SW
46	PORSN	03	00~03	RF Pre/Over-shoot adjustment
47	TINT	0	-16~+15	Tint
48	SHRF	0	-16~+15	Difference Value of RF Sharpness
49	TEXC	08	00~127	OSD Text Contrast
50	AUFL	00	00, 01	Auto. Fresh

To be continued.

Service Adjustments

No.	Item	Initial value	Range	Description
51	COOP	07	00~07	Colour Killer
52	Y-APF	01	00, 01	Y-APF Select
53	DEEM	00	00, 01	De-emphasis TC
54	V-LVL	04	00~07	Video Level
55	FMLVL	16	00~31	FM Level
56	TTEST	00	00~07	Trap Test
57	IFOM-S	00	00, 01	Over Mod. SW
58	IFMN-S	00	00, 01	Audio Monitor SW, Monitor/FM
59	IFTRPS	01	00, 01	IC Built-in SIF Trap ON/OFF
60	IFMLVL	136	00~255	Video Level Coarse Adjustment & Mod. Operating Dot Setting
61	VBSW	00	00, 01	VBLK SW
62	FBTS	00	00, 01	FBP Blanking SW
63	HBLKL	06	00~07	H-Blanking Control Left
64	HBLKR	04	00~07	H-Blanking Control Right
65	AFCRF	00	00, 01	Adjustment of AFC Gain & Gate (RF)
66	VSURF	00	00, 01	Adjustment of Vertical Sync. Separation Sensitivity (RF)
67	CDMRF	00	00~07	Vertical Count Down Loop Adjustment (RF)
68	AFCAV	00	00, 01	Adjustment of AFC Gain & Gate (AV)
69	VSUAV	00	00, 01	Adjustment of Vertical Sync. Separation Sensitivity (AV)
70	CDMAV	00	00~07	Vertical Count Down Loop Adjustment (AV)
71	HLK-T	00	00, 01	H-lock, V-Det. (RF)
72	HLK-V	00	00, 01	H-lock, V-Det. (AV)
73	VCO-SW	00	00, 01	C. VCO Adjustment SW
74	VCOADJ	03	00~03	C. VCO Adjustment
75	GRAY	00	00, 01	Gray Mode
76	CROSS	00	00~03	Cross Black/White
77	HL-SW	01	00, 01	Half Tone ON/OFF
78	HL-TON	00	00~03	Half Tone Level
79	AVNCON	64	00~127	Contrast (No Signal in AV)
80	AVNBRI	64	00~127	Brightness (No Signal in AV)
81	POMT	12	00~127	Power Mute Time
82	CHMT	12	00~31	Channel Mute Time
83	SYST	03	00~255	System-N
84	RELAY	80	00~255	Power Relay Time
85	CCD	31	00~31	Horizontal Remark Position Compensation Register
86	TVAVTM	00	00~255	AV/TV Mute Time

Important Notice:

Do not attempt to adjust service adjustments not listed on below otherwise it may cause loss of performance and for correct operation.

Service Adjustments


Item 01 [RFAGC] AGC

NOTE: Do not attempt this adjustment with weak signal.

- (1) Tune the receiver to most clearest (or strongest) VHF station in your area. Set the brightness and contrast controls to maximum. Set the colour control to minimum.
- (2) Select Item No. 01 [RFAGC] in the service mode.
- (3) Change value until the snow noise just disappears.
- (4) Exit from the service mode.


Item 02 [H-PHA] HORIZONTAL CENTRE

- (1) Receive a monochrome circular pattern.
- (2) Set the brightness and contrast to normal.
- (3) Select Item No. 02 [H-PHA] in the service mode.
- (4) Change value to be optimum horizontal centre position.
- (5) Exit from the service mode.

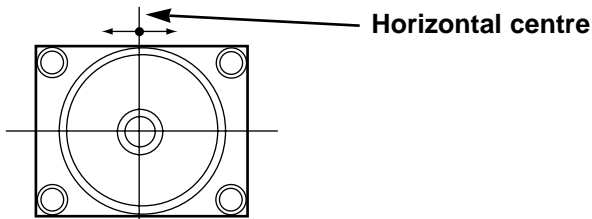


Item 03 [V-POS] VERTICAL CENTRE

- (1) Receive a monochrome circular pattern.
- (2) Set the brightness and contrast to maximum.
- (3) Select Item No. 03 [V-POS] in the service mode.
- (4) Change value to be optimum vertical centre position.
- (5) Exit from the service mode.

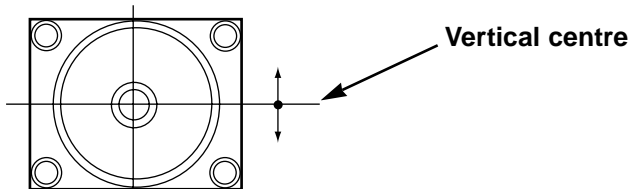

Item 04 [V-SIZ] VERTICAL SIZE

- (1) Receive a monochrome circular pattern.
- (2) Set the brightness and contrast to maximum.
- (3) Select Item No. 04 [V-SIZ] in the service mode.
- (4) Change value to be optimum vertical size.
- (5) Exit from the service mode.

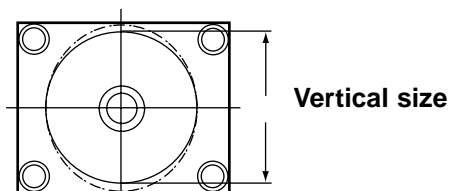

Item 12 [OSDHP] OSD POSITION


- (1) Receive a monochrome circular pattern.
- (2) Set the brightness and contrast to normal.
- (3) Select Item No. 12 [OSDHP] in the service mode.
- (4) Change value to be proper OSD position.
- (5) Exit from the service mode.

Item 65 [AFCRF] AFC GAIN

- (1) Switch on the TV.
- (2) Select Item No. 65 [AFCRF] in service mode.
- (3) Change data value to "01".
- (4) Exit from the service mode.

Item 85 [CCD] CAPTION H-POSITION ADJ.

- (1) Tune receiver to a caption channel.
- (2) Check that CAPTION position is in the horizontal center of the screen. If CAPTION center is too right or left, perform steps 3-6. (See figure below.)
- (3) Select Item No. 85 [CCD] in the service mode.
- (4) Adjust data with + or - key for proper horizontal center.
- (5) Exit from the service mode

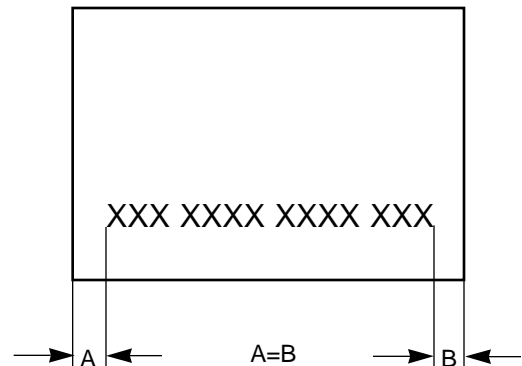



Caption H-position Adj.

Service Adjustments

Items 16-23 GREY SCALE

- (1) Receive a monochrome circular pattern.
- (2) Set the brightness and colour to normal, contrast to maximum.
- (3) Enter to the service mode.
- (4) Set each value of Item-16 **RBIAS**, 17 **GBIAS**, 18 **BBIAS** mode to 00. Set each value of Item-19 **RDRIV**, 21 **BDRIV** mode to 63, 20 **GDRIV** to 07.
- (5) Select Item-22 mode to be one horizontal scanning line and turn the screen volume on the FBT to obtain just visible one coloured line.
- (6) Press the **1 (Red Bias +)**, **4 (Red Bias -)**, **2 (Green Bias +)**, **5 (Green Bias -)**, **3 (Blue Bias +)** or **6 (Blue Bias -)** button to adjust the brightness of each colour until a dim white line produced. Please see the control button allocations in this mode.
- (7) Select Item-23 **DRV** mode to enter the white balance adjusting mode.
- (8) Press the **7 (Red Drive +)**, **RECALL (Red Drive -)**, **8 (Blue Drive +)** or **0 (Blue Drive -)** button alternately to produce normal black and white picture.
- (9) Exit from the service mode.
- (10) Check for proper grey scale tracking at all brightness levels.

NOTE: If the grey scale adjustment is made after picture tube replacement, check the high voltage.

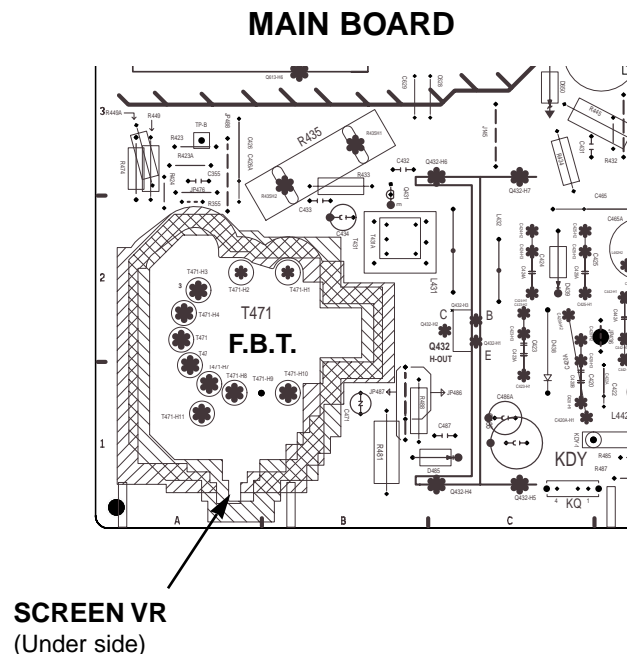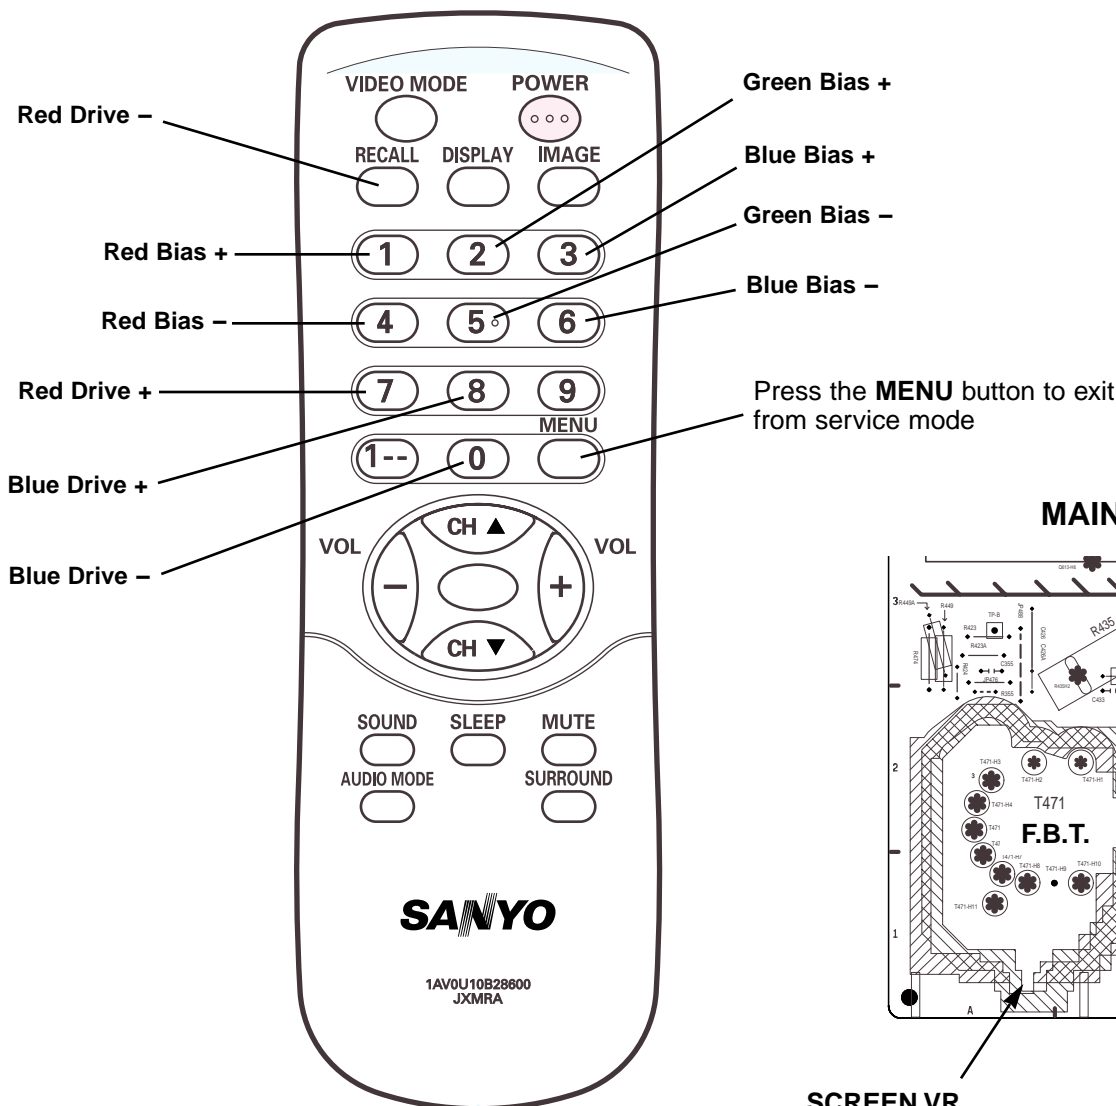

Service Adjustments

Service Adjustment-2

FINE TUNING

This adjustment is used to do a fine tuning of the channels with poor reception after they have been stored by the automatic tuning.


This function is available for one channel only and the fine-tuned channel is memorized into IC802 (EEPROM).

1. Enter the Service Menu

While pressing the **MENU** button on the television, press the **"4"** or **MENU** button on the remote control unit. The Service Menu now appear.



Fine tuning service mode

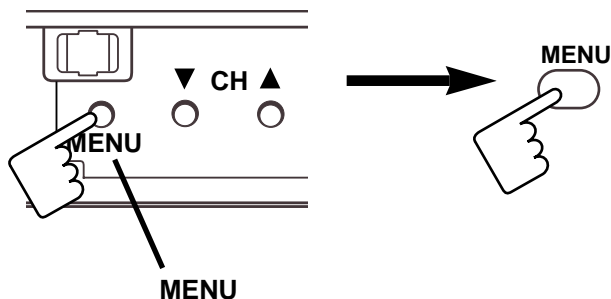


[Entering the Service Menu]

2. Service Adjustments:


Press and hold the **VOLUME +** or **VOLUME -** button on the remote control handset or TV set to make fine tuning adjustment. Press and hold the **VOLUME +** button for higher frequency tuning, and press and hold the **VOLUME -** for lower frequency tuning.

Fine tuning data value will be automatically stored in memory.

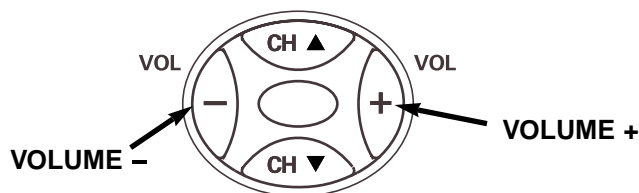

[Service Adjustment]


To return to normal TV mode, press the **MENU** button on the TV set or remote control handset. (Or will automatically return to normal TV mode after 5 seconds.)



[Exit from the Service Menu]


Service Adjustment-3

- (1) Receive the monochrome circular pattern.
- (2) Set the brightness to normal and contrast to maximum.
- (3) Adjust the focus control on the F.B.T. for the best focus on the screen centre.

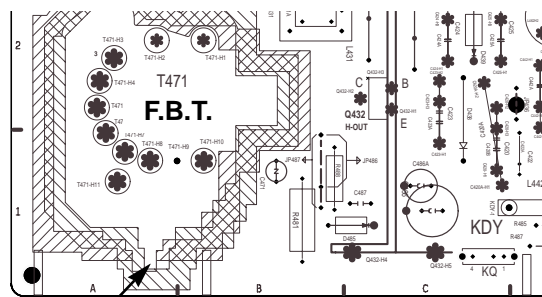

+B POWER SUPPLY ADJUSTMENT

1. Connect a DC voltmeter to TP-" +B +130V" and the ground. Set the +B adjustment control (VR651) to middle range.
2. Set the brightness to normal and contrast to maximum.
3. Tune the receiver to an active channel and synchronized picture.
4. Adjust +B voltage to 130 ± 1.0 volt DC by using VR651.

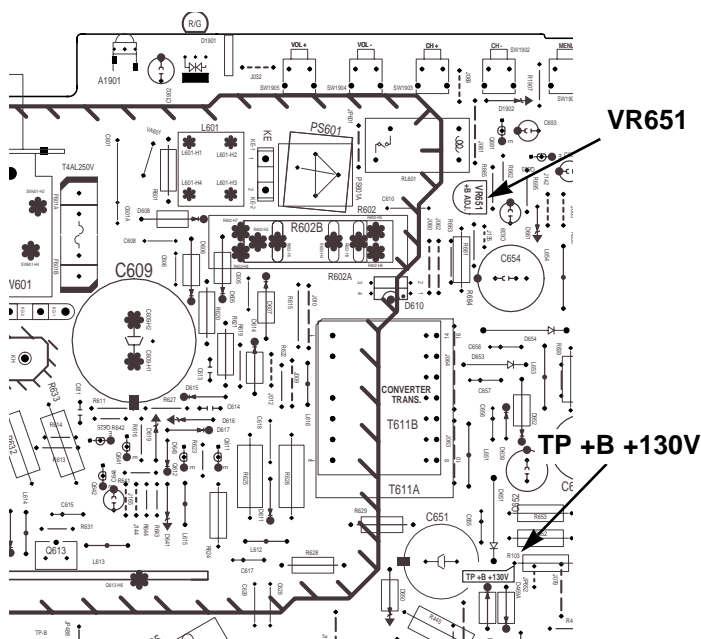

Note: +B (+130V) Voltage Check and Grayscale Adjustment must be completed before attempting High Voltage Check.

- (1) Connect high voltage voltmeter negative lead to ground, and connect + lead to anode of picture tube.
- (2) Tune receiver to an active channel and confirm TV is operating properly.
- (3) The high voltage must be 14"=21KV \pm 1KV, 20"/21"=25KV \pm 1KV, 29"=26.5KV \pm 1KV and less than 14"=25KV, 20"/21"=27.5KV, 29"=29.5KV at 0 beam current (Brightness and contrast minimum setting).

Note: If the picture tube is replaced, check the high voltage. The horiz. width adjustment affects the high voltage. Therefore, re-check the high voltage.

This TV set has a built-in power supply protection circuit. It is provided to protect the TV set in case of a power supply circuit malfunctions. When something abnormality occurs during TV reception, the TV set goes to the stand-by mode.

When an abnormality occurs during TV reception, it causes pin 27 of the CPU to go continually Low voltage for about one second. The CPU detects that this has occurred and outputs the signal from pin 31 to switch off the power supply lines.

Releasing the protective circuit and restoring power supply

To release the protective circuit and restore power supply, turn the power to the TV set OFF and then ON again via either the main power switch or the ON-OFF button on the remote control. This will work only if the power supply trouble was temporary. If there is permanent trouble such as a damaged circuit, power cannot be restored and the circuit will have to be repaired.

Purity and Convergence Adjustment

CAUTION: The Convergence and Purity adjustments have been made at the factory. Readjustment should be made only after picture tube or deflection yoke replacement, following the steps below:

PURITY ADJUSTMENT

1. Demagnetize the picture tube and receiver using an external degaussing coil. When replacing picture tube or deflection yoke, mount deflection yoke and purity-convergence magnets assembly properly, see figures 1 and 4.
2. Turn Red and Blue guns on and provide only Green raster. Rotate Screen control to fully counterclockwise. Rotate Red and Blue Bias controls fully counterclockwise. Slowly rotate Green Bias control clockwise to produce Green raster.
3. Loosen the screw holding the Deflection Yoke and remove the 3 Rubber Wedges, and slide the Deflection Yoke fully forward.
4. Rotate and spread the Tabs of the two Purity Magnets to centre the vertical green belt in the picture screen. The Purity Magnets are also adjusted to obtain vertical centring of the raster.
5. Slowly slide the Deflection Yoke backward until a uniform green screen is obtained.
6. Check the purity of the red and blue screens for uniformity, turn off other colours to check this (use bias controls). Readjust the yoke position if necessary until all screens are pure.
7. Adjust each Bias control and screen control to obtain white raster. Refer to Gray Scale Adjustment. If part of the picture screen is coloured, adjust the Deflection Yoke position forward or backward slightly.

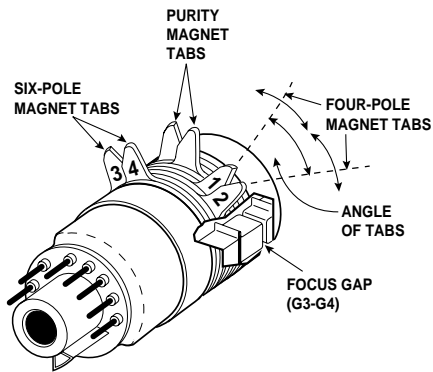


Figure 1. Purity and Convergence Magnets

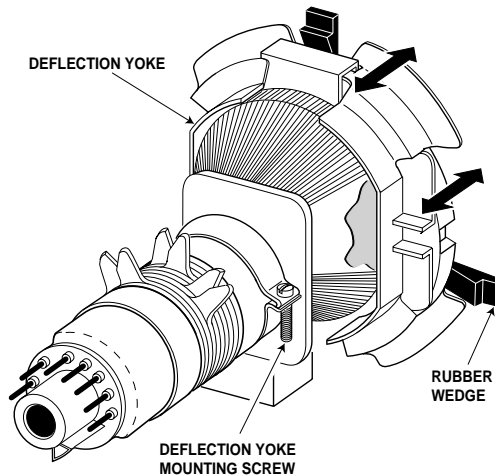


Figure 4. Deflection Yoke Movement

8. Tighten the mounting screw of the Deflection Yoke. Adjust Convergence next.

CENTRE CONVERGENCE ADJUSTMENT

1. Use a dot crosshatch pattern signal.
2. Turn Red and Blue guns on and turn off Green gun. Adjust the angle between the Tabs of the Four Pole Magnet 1 and 2, and superimpose the Red and Blue vertical lines in the centre area of the picture screen. Refer to figure 2.
3. Keeping the mutual angle of the Tabs of the Four Pole Magnet turn them together to superimpose the Blue and Red horizontal lines in the centre area of the picture screen. Refer to figure 2.
4. Turn Green gun on and adjust Six Pole Magnet 3 and 4 that the Green line superimposed on the Red/Blue lines. This is the same procedure used in steps 2 and 3. Refer to figure 3.

OUTER AREA CONVERGENCE ADJUSTMENT

Slightly loosen the screw holding the Deflection Yoke. Adjust the Deflection Yoke to converge the detail in the outer area (left side and right side) of the picture screen by orbital movement of the front of the Yoke, then secure the Deflection Yoke in appropriate position by putting the wedges as illustrated. Tighten screw holding the Deflection Yoke.




Figure 5. Adjusting Magnet

Adjust tabs angle to superimpose blue and red vertical line.

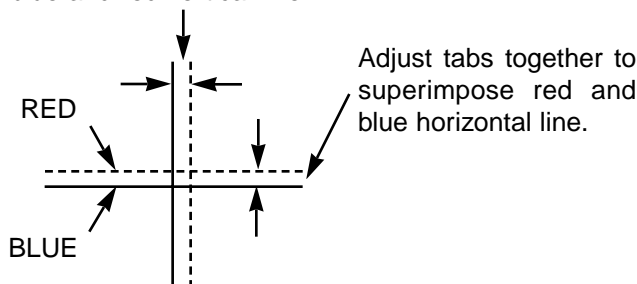


Figure- 2 BLUE AND RED LINE MOVEMENT

Adjust tabs angle to superimpose red/blue and green vertical line.


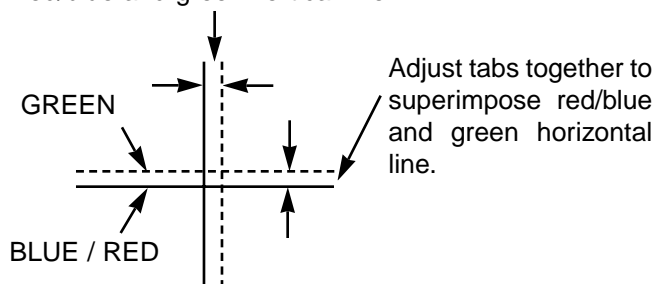


Figure- 3 BLUE/RED AND GREEN MOVEMENT

Cabinet Parts List

Note: Parts order must contain Service Ref. No., Part No., and descriptions.

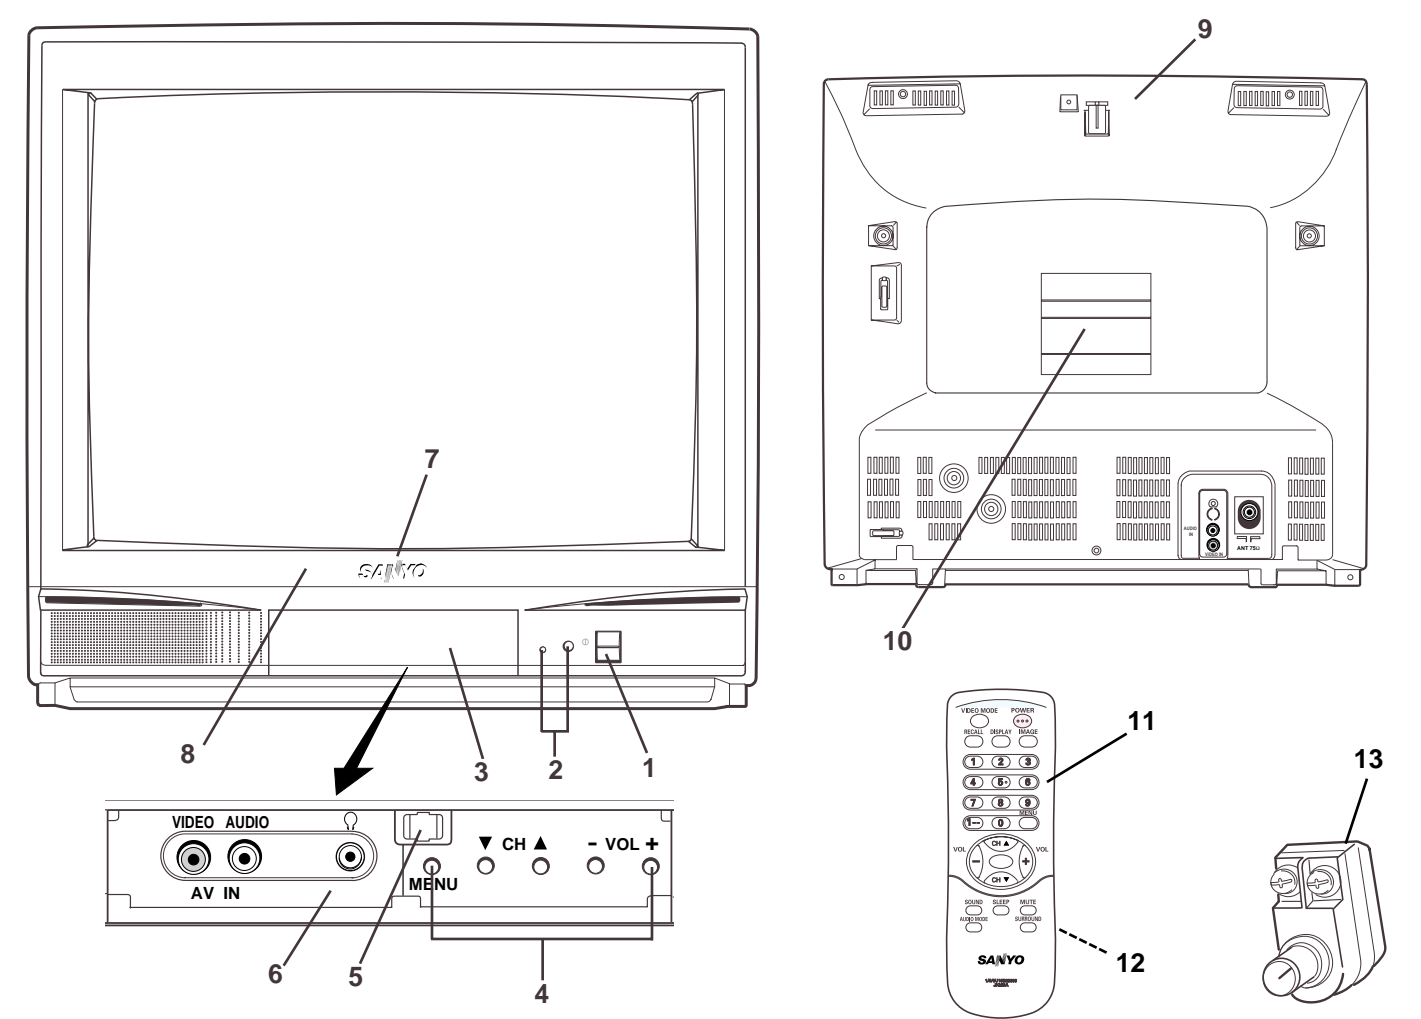

Key No.	Part No.	Description	Key No.	Part No.	Description
1	610 278 1496	BUTTON POWER F8GF			
	610 270 5591	SPRING-HKG-S6KL			
2	610 278 1601	DEC IND F8GF			
3	610 278 3537	DOOR F8GG			
4	610 277 8403	BUTTON UNITED F8FE			
5	610 104 2505	LATCH PUSH,7.9X6.9BK			
or	655 000 6936	LATCH PUSH,7.9X6.9BK			
6	610 277 9462	DEC CONTROL SHEET F8GE			
7	645 040 1107	BADGE,SANYO			
8	610 278 1557	CABINET FRONT F8GG			
9	610 277 7369	CABINET BACK F8GE			
10	610 318 1400	LABEL RATING F8GT			
11	645 051 8904	ASSY,REMOCON JXMRA			
12	610 297 3723	RC-BATTERY LID-JXMRA			
13	645 004 3925	ANT MATCHING BOX			
	645 005 0251	ANT MATCHING BOX			
	610 317 9407	INSTRUCTIONS MANUAL F8FT			

Chassis Electrical Parts List

F8GT

Product safety should be considered when a component replacement is made in any area of a receiver. Components indicated by a Δ mark in this parts list and the circuit diagram show components whose value have special significance to product safety. It is particularly recommended that only parts specified on the following parts list be used for components replacement pointed out by the mark.

Note: Parts order must contain Service Ref. No., Part No., and descriptions. The main PCB unit will be supplied without tuner and flyback transformer. They should be ordered separately.

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
NOTES: Read description in the Capacitor and Resistor as follows: CAPACITOR CERAMIC 100P K 50V <div style="margin-left: 100px;"> Rated Voltage Tolerance Symbols: Less than 10pF A : Not specified B : $\pm 0.1\text{pF}$ C : $\pm 0.25\text{pF}$ D : $\pm 0.5\text{pF}$ F : $\pm 1\text{pF}$ G : $\pm 2\text{pF}$ R : $\pm 0.25\text{-}0\text{pF}$ S : $\pm 0\text{-}0.25\text{pF}$ E : $\pm 0\text{-}1\text{pF}$ More than 10pF A : Not specified B : $\pm 0.1\%$ C : $\pm 0.25\%$ D : $\pm 0.5\%$ F : $\pm 1\%$ G : $\pm 2\%$ H : $\pm 3\%$ J : $\pm 5\%$ K : $\pm 10\%$ L : $\pm 15\%$ M : $\pm 20\%$ N : $\pm 30\%$ P : $\pm 100\text{-}0\%$ Q : $\pm 30\text{-}10\%$ T : $\pm 50\text{-}10\%$ U : $\pm 75\text{-}10\%$ V : $\pm 20\text{-}10\%$ W : $\pm 100\text{-}10\%$ X : $\pm 40\text{-}20\%$ Y : $\pm 150\text{-}10\%$ Z : $\pm 80\text{-}20\%$ Rated value: P=pico farad, U=micro farad </div> Material: CERAMIC..... Ceramic MT-PAPER..... Metallized Paper POLYESTER..... Polyester MT-POLYEST.....Metallized Polyester POLYPRO..... Polypropylene MT-POLYPRO.....Metallized Polypropylene COMPO FILM..... Composite film MT-COMPO.....Metallized Composite STYRENE.....Styrene TA-SOLID..... Tantalum Solid AL-SOLID..... Aluminium Solid ELECT..... Electrolytic NP-ELECT..... Non-polarised Electrolytic OS-SOLID..... Aluminium Solid with Organic Semiconductive Electrolytic DL-ELECT..... Double Layered Electrolytic			OUT OF CIRCUIT BOARD PICTURE TUBE Δ Q901 414 010 4604 CRT A48EJN05X101 COIL Δ L901 652 001 4435 COIL,DEGAUSSING MISCELLANEOUS SP901 652 000 0650 SPEAKER, 8 652 001 3476 SPEAKER, 8 Δ W901 645 037 2490 CORD, POWER-2.4MK-A5102 W902 652 001 4510 ASSY,WIRE GND CONNECTOR F		
RESISTOR CARBON 4.7K J A 1/4W <div style="margin-left: 100px;"> Rated Wattage Performance Symbols: A: General B: Non flammable Z: Low noise Other: Temperature coefficient Tolerance Symbols: A : $\pm 0.05\%$ B : $\pm 0.1\%$ C : $\pm 0.25\%$ D : $\pm 0.5\%$ F : $\pm 1\%$ G : $\pm 2\%$ J : $\pm 5\%$ K : $\pm 10\%$ M : $\pm 20\%$ P : $\pm 5\text{-}15\%$ Rated value, ohms: K: 1,000, M: 1,000,000 </div> Material: CARBON..... Carbon MT-FILM..... Metal Film OXIDE-MT..... Oxide Metal Film SOLID..... Composition MT-GLAZE..... Metal Glaze WIRE WOUND... Wire Wound CERAMIC RES.. Ceramic FUSIBLE RES.... Fusible			610 315 1281 ASSY,PWB,MAIN F8GP 1AA0B10E694CA TRANSISTOR Q111 405 015 9701 TR 2SC2814-F4-TB Q171 405 134 5905 TR 2SA1037AK-T146-R 405 147 2205 TR 2SA1037AK-S-T146 405 002 0308 TR 2SA1037K T146 R 405 002 0407 TR 2SA1037K T146 S 405 002 6706 TR 2SA1179-M6-TB 405 002 6904 TR 2SA1179-M7-TB 405 163 1503 TR 2SA1179N-M6-TB 405 163 2708 TR 2SA1179N-M7-TB 405 173 9605 TR 2SA1235A1E 405 173 9704 TR 2SA1235A1F Q261 405 134 5905 TR 2SA1037AK-T146-R 405 147 2205 TR 2SA1037AK-S-T146 405 002 0308 TR 2SA1037K T146 R 405 002 0407 TR 2SA1037K T146 S 405 002 6706 TR 2SA1179-M6-TB 405 002 6904 TR 2SA1179-M7-TB 405 163 1503 TR 2SA1179N-M6-TB 405 163 2708 TR 2SA1179N-M7-TB 405 173 9605 TR 2SA1235A1E 405 173 9704 TR 2SA1235A1F Q431 405 018 0507 TR 2SC3332-R 405 018 0606 TR 2SC3332-S Q432 406 017 1908 TR TT2140LS-YB11 Q527 405 014 4509 TR 2SC2412K T146 R 405 014 4608 TR 2SC2412K T146 S 405 015 8704 TR 2SC2812-L6-TB 405 015 8902 TR 2SC2812-L7-TB 405 163 1602 TR 2SC2812N-L6-TB0 405 163 1701 TR 2SC2812N-L7-TB0 405 173 9803 TR 2SC3928A1R 405 173 9902 TR 2SC3928A1S Q611 405 013 6801 TR 2SC2274-E 405 013 7006 TR 2SC2274-F Q612 405 006 6504 TR 2SA984-E 405 006 6702 TR 2SA984-F Q613 405 171 4107 TR 2SK2647 Q625 405 013 6801 TR 2SC2274-E		

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
Q641	405 013 7006	TR 2SC2274-F	Q693	405 020 7709	TR 2SC945A-QA
	406 000 6804	TR 2SA1015-GR(SAN)		405 020 7907	TR 2SC945A-RA
	405 001 7605	TR 2SA1015-Y(SAN)		405 011 8401	TR 2SC1740S-Q
	405 004 3208	TR 2SA564A-R(CU)		405 011 8500	TR 2SC1740S-R
Q642	405 151 3304	TR 2SA608NF-NPA		405 011 8609	TR 2SC1740S-S
	405 006 1806	TR 2SA933S-R		405 012 2002	TR 2SC1815-GR
	405 011 8401	TR 2SC1740S-Q		405 012 2309	TR 2SC1815-Y
	405 011 8500	TR 2SC1740S-R	Q818	405 157 0505	TR 2SC536NF-NPA
Q651	405 011 8609	TR 2SC1740S-S		405 151 8705	TR 2SC536NG-NPA
	405 012 2002	TR 2SC1815-GR		405 020 7501	TR 2SC945A-PA
	405 012 2309	TR 2SC1815-Y		405 020 7709	TR 2SC945A-QA
Q652	405 157 0505	TR 2SC536NF-NPA	Q861	405 014 4509	TR 2SC2412K T146 R
	405 151 8705	TR 2SC536NG-NPA		405 014 4608	TR 2SC2412K T146 S
	405 020 7501	TR 2SC945A-PA		405 015 8704	TR 2SC2812-L6-TB
	405 020 7709	TR 2SC945A-QA		405 015 8902	TR 2SC2812-L7-TB
Q654	405 020 7907	TR 2SC945A-RA	Q871	405 163 1602	TR 2SC2812N-L6-TB0
	405 089 0000	TR 2SA1707-S		405 163 1701	TR 2SC2812N-L7-TB0
	405 089 0109	TR 2SA1707-T		405 173 9803	TR 2SC3928A1R
	405 009 6907	TR 2SB985-S		405 173 9902	TR 2SC3928A1S
Q661	405 009 7003	TR 2SB985-T	Q881	405 134 5905	TR 2SA1037AK-T146-R
	405 059 9804	TR 2SD1913-Q-RA		405 147 2205	TR 2SA1037AK-S-T146
	405 059 9903	TR 2SD1913-R-RA		405 002 0308	TR 2SA1037K T146 R
	405 014 4509	TR 2SC2412K T146 R		405 002 0407	TR 2SA1037K T146 S
Q662	405 014 4608	TR 2SC2412K T146 S	Q886	405 002 6706	TR 2SA1179-M6-TB
	405 015 8704	TR 2SC2812-L6-TB		405 002 6904	TR 2SA1179-M7-TB
	405 015 8902	TR 2SC2812-L7-TB		405 163 1503	TR 2SA1179N-M6-TB
	405 163 1602	TR 2SC2812N-L6-TB0		405 163 2708	TR 2SA1179N-M7-TB
Q663	405 163 1701	TR 2SC2812N-L7-TB0	Q681	405 173 9605	TR 2SA1235A1E
	405 173 9803	TR 2SC3928A1R		405 173 9704	TR 2SA1235A1F
	405 173 9902	TR 2SC3928A1S		405 014 4509	TR 2SC2412K T146 R
	405 134 5905	TR 2SA1037AK-T146-R		405 014 4608	TR 2SC2412K T146 S
Q681	405 147 2205	TR 2SA1037AK-S-T146	INTEGRATED CIRCUIT		
	405 002 0308	TR 2SA1037K T146 R	IC001	409 472 4408	IC LA4266-E
	405 002 0407	TR 2SA1037K T146 S	IC201	409 517 5902	IC LA76818A
	405 002 6706	TR 2SA1179-M6-TB	IC202	409 241 5407	IC BA178M05T
Q681	405 002 6904	TR 2SA1179-M7-TB		409 265 4806	IC L78M05CV
	405 163 1503	TR 2SA1179N-M6-TB		409 172 1509	IC MC78M05CT
	405 163 2708	TR 2SA1179N-M7-TB		409 320 5700	IC UPC78M05AHF
	405 173 9605	TR 2SA1235A1E	IC501	409 507 0900	IC LA78040N
Q681	405 173 9704	TR 2SA1235A1F		409 510 1109	IC TDA9302H
	405 014 4509	TR 2SC2412K T146 R	IC681	409 241 5407	IC BA178M05T
	405 014 4608	TR 2SC2412K T146 S		409 265 4806	IC L78M05CV
	405 015 8704	TR 2SC2812-L6-TB		409 172 1509	IC MC78M05CT
Q681	405 015 8902	TR 2SC2812-L7-TB		409 320 5700	IC UPC78M05AHF
	405 163 1602	TR 2SC2812N-L6-TB0			
	405 163 1701	TR 2SC2812N-L7-TB0			
	405 173 9803	TR 2SC3928A1R			
Q681	405 173 9902	TR 2SC3928A1S			
	405 011 8401	TR 2SC1740S-Q			
	405 011 8500	TR 2SC1740S-R			
	405 011 8609	TR 2SC1740S-S			
Q681	405 012 2002	TR 2SC1815-GR			
	405 012 2101	TR 2SC1815-O			
	405 012 2309	TR 2SC1815-Y			
	405 157 0505	TR 2SC536NF-NPA			
Q681	405 151 8705	TR 2SC536NG-NPA			
	405 020 7501	TR 2SC945A-PA			


Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
IC801	410 527 1907	IC LC863440W-53Z0-TLM	C441	403 346 6901	MT-POLYPRO 0.22U J 250V
IC802	409 495 7004	IC CAT24WC04P	C442	403 346 6901	MT-POLYPRO 0.22U J 250V
	409 470 3403	IC KS24C041C	C469	403 049 4204	ELECT 10U M 50V
	409 427 4705	IC M24C04-BN6	C471	404 056 5208	NP-ELECT 2.2U M 100V
	410 499 0908	IC AT24C04-10PI-2.7		404 056 5307	NP-ELECT 2.2U M 100V
CAPACITOR				404 045 6605	NP-ELECT 2.2U M 50V
C004	404 084 4204	ELECT 4.7U M 50V	C486	403 055 8401	ELECT 22U M 250V
C005	404 089 2700	ELECT 100U M 25V	C487	403 076 5304	CERAMIC 680P K 500V
C007	403 342 3300	CERAMIC 0.1U K 25V	C510	404 084 4204	ELECT 4.7U M 50V
C008	403 342 3300	CERAMIC 0.1U K 25V		403 051 0607	ELECT 4.7U M 50V
C031	404 089 2700	ELECT 100U M 25V	C514	403 049 4204	ELECT 10U M 50V
C035	403 045 1504	ELECT 1000U M 25V	C515	403 045 9807	ELECT 2200U M 25V
C041	403 047 5005	ELECT 470U M 25V	C517	403 053 2104	ELECT 220U M 35V
C101	403 044 1703	ELECT 470U M 16V	C518	403 073 3907	CERAMIC 3900P K 50V
C106	403 051 3103	ELECT 47U M 50V	C520	403 064 1202	POLYESTER 0.1U K 100V
C107	404 084 4303	ELECT 47U M 50V		403 276 9706	POLYESTER 0.1U K 100V
	403 051 3103	ELECT 47U M 50V	C521	403 054 1502	ELECT 470U M 35V
C111	403 215 2201	CERAMIC 0.01U K 50V	C524	403 260 2508	MT-COMPO 0.18U J 50V
C112	403 215 2201	CERAMIC 0.01U K 50V	C527	403 049 4204	ELECT 10U M 50V
C113	403 215 2201	CERAMIC 0.01U K 50V	△C601	404 072 7705	MT-POLYEST 0.068U M 250V
C120	403 224 6603	CERAMIC 0.022U Z 50V		404 079 6503	MT-POLYEST 0.068U M 250V
C121	403 215 2201	CERAMIC 0.01U K 50V		404 073 7506	MT-POLYEST 0.068U M 275V
C122	403 042 2405	ELECT 100U M 16V		404 092 0700	MT-POLYEST 0.068U M 275
C132	403 048 6308	ELECT 0.47U M 50V	C608	403 076 6707	CERAMIC 1000P K 1K
C134	404 084 3900	ELECT 10U M 50V		403 312 8205	CERAMIC 1000P K 1K
C135	403 048 6308	ELECT 0.47U M 50V	C609	404 038 1600	ELECT 100U M 400V
C138	403 284 4304	CERAMIC 0.022U K 50V		404 069 5707	ELECT 100U M 400V
C171	403 155 2101	CERAMIC 1500P K 50V	C610	404 073 3904	CERAMIC 1000P K 250V
C172	403 215 2201	CERAMIC 0.01U K 50V		404 073 2105	CERAMIC 1000P M 250V
C178	404 084 3801	ELECT 1U M 50V		404 071 3302	CERAMIC 1000P M 400V
C1902	403 050 2800	ELECT 22U M 50V		404 086 0907	CERAMIC 1000P M 400V
C201	403 086 2300	NP-ELECT 1U M 50V	C611	403 056 9704	POLYESTER 0.01U J 50V
C202	403 058 2604	POLYESTER 0.015U J 50V		403 178 9309	POLYESTER 0.01U J 50V
	403 179 3207	POLYESTER 0.015U J 50V	C613	403 181 8207	POLYESTER 0.1U K 50V
C203	403 215 2201	CERAMIC 0.01U K 50V	C614	403 237 7901	MT-COMPO 0.22U J 50V
C204	403 049 4204	ELECT 10U M 50V	C615	403 325 5109	CERAMIC 220P K 1K
C205	403 049 4204	ELECT 10U M 50V	C617	403 325 5109	CERAMIC 220P K 1K
C209	403 048 6308	ELECT 0.47U M 50V	C618	403 083 8107	POLYPRO 0.01U J 630V
C210	403 047 5005	ELECT 470U M 25V	△C628	404 073 5106	CERAMIC 470P K 250V
C212	403 155 4204	CERAMIC 15P J 50V		404 073 3300	CERAMIC 470P M 250V
C221	403 342 3300	CERAMIC 0.1U K 25V		404 071 4507	CERAMIC 470P K 400V
C222	403 342 3300	CERAMIC 0.1U K 25V	△C629	404 087 0302	CERAMIC 470P M 400V
C223	403 342 3300	CERAMIC 0.1U K 25V		404 073 4505	CERAMIC 2200P K 250V
C224	403 342 3300	CERAMIC 0.1U K 25V		404 073 2907	CERAMIC 2200P M 250V
C225	403 049 0008	ELECT 1U M 50V		404 071 4101	CERAMIC 2200P M 400V
C226	403 086 2300	NP-ELECT 1U M 50V		404 084 5904	CERAMIC 2200P M 400V
C227	403 049 4204	ELECT 10U M 50V	C639	403 049 0008	ELECT 1U M 50V
C230	403 215 2201	CERAMIC 0.01U K 50V	C643	403 043 7409	ELECT 3300U M 16V
C231	403 260 2904	MT-COMPO 0.33U J 50V	C644	404 084 4105	ELECT 3.3U M 50V
C232	403 260 2904	MT-COMPO 0.33U J 50V		403 046 1602	ELECT 3.3U M 25V
C233	403 045 1504	ELECT 1000U M 25V	C651	404 073 9005	ELECT 220U M 160V
C240	403 215 2201	CERAMIC 0.01U K 50V	C652	404 087 3402	ELECT 1000U M 35V
C243	403 215 2201	CERAMIC 0.01U K 50V		403 052 8503	ELECT 1000U M 35V
C244	403 051 3103	ELECT 47U M 50V	C654	403 045 9807	ELECT 2200U M 25V
C245	403 086 2300	NP-ELECT 1U M 50V	C655	403 247 5003	CERAMIC 470P K 1K
C246	403 049 0008	ELECT 1U M 50V		403 269 1809	CERAMIC 470P K 1K
C247	403 049 9803	ELECT 2.2U M 50V	C656	403 222 1303	CERAMIC 1000P K 1K
C273	403 342 3300	CERAMIC 0.1U K 25V		403 271 9602	CERAMIC 1000P K 1K
C352	403 075 6906	CERAMIC 100P K 500V	C657	403 247 5003	CERAMIC 470P K 1K
C358	403 049 0008	ELECT 1U M 50V		403 269 1809	CERAMIC 470P K 1K
C423	404 077 4709	MT-POLYPRO 8000P H 1.5K	C658	403 247 5003	CERAMIC 470P K 1K
	403 343 8304	MT-POLYPRO 8000P H 1.5K		403 269 1809	CERAMIC 470P K 1K
C426	403 066 6106	MT-POLYEST 0.47U J 250V	C663	404 084 3801	ELECT 1U M 50V
C432	403 075 7101	CERAMIC 1000P K 500V		403 049 0008	ELECT 1U M 50V
C433	403 076 3102	CERAMIC 3900P K 500V	C664	404 084 2705	ELECT 10U M 16V
C434	403 051 3103	ELECT 47U M 50V		403 041 8804	ELECT 10U M 16V
			C665	403 043 0202	ELECT 220U M 16V

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
C681	403 040 5408	ELECT 2200U M 10V	R222	401 105 0504	MT-GLAZE 1K JA 1/16W
C691	403 039 6508	ELECT 100U M 10V	R223	401 105 0504	MT-GLAZE 1K JA 1/16W
C693	403 043 9106	ELECT 47U M 16V	R224	401 105 5301	MT-GLAZE 4.7K JA 1/16W
C801	403 155 4204	CERAMIC 15P J 50V	R225	401 105 5301	MT-GLAZE 4.7K JA 1/16W
C802	403 157 2505	CERAMIC 27P J 50V	R226	401 105 3406	MT-GLAZE 27K JA 1/16W
C803	403 215 2201	CERAMIC 0.01U K 50V	R227	401 105 4205	MT-GLAZE 33K JA 1/16W
C805	403 049 4204	ELECT 10U M 50V	R228	401 024 7707	CARBON 100K JA 1/6W
C824	403 342 3300	CERAMIC 0.1U K 25V	R229	401 105 6704	MT-GLAZE 680K JA 1/16W
C835	403 049 0008	ELECT 1U M 50V	R230	401 026 9303	CARBON 47 JA 1/6W
C837	403 145 9905	CERAMIC 22P J 50V	R234	401 105 0900	MT-GLAZE 120 JA 1/16W
C838	403 145 9905	CERAMIC 22P J 50V	R235	401 105 0900	MT-GLAZE 120 JA 1/16W
C841	403 145 9905	CERAMIC 22P J 50V	R236	401 105 0900	MT-GLAZE 120 JA 1/16W
C842	403 145 9905	CERAMIC 22P J 50V	R243	401 068 3703	OXIDE-MT 470 JA 2W
C851	403 157 3106	CERAMIC 56P J 50V	R244	401 105 5400	MT-GLAZE 47K JA 1/16W
C852	403 157 3106	CERAMIC 56P J 50V	R245	401 105 5400	MT-GLAZE 47K JA 1/16W
C853	403 157 3106	CERAMIC 56P J 50V	R263	401 105 0603	MT-GLAZE 10K JA 1/16W
C861	403 049 0008	ELECT 1U M 50V	R264	401 024 9008	CARBON 120 JA 1/6W
C862	403 342 3300	CERAMIC 0.1U K 25V	R265	401 105 3901	MT-GLAZE 33 JA 1/16W
C880	403 155 2200	CERAMIC 3300P K 50V	R267	401 026 9600	CARBON 470 JA 1/6W
C891	403 049 0008	ELECT 1U M 50V	R271	401 105 0405	MT-GLAZE 100 JA 1/16W
C893	403 049 9803	ELECT 2.2U M 50V	R272	401 105 0405	MT-GLAZE 100 JA 1/16W
C894	403 281 5007	CERAMIC 0.033U K 25V	R280	401 105 0405	MT-GLAZE 100 JA 1/16W
C896	403 113 3805	CERAMIC 1000P K 50V	R286	401 203 9904	MT-GLAZE 4.7K FA 1/16W
RESISTOR			R289	401 105 0405	MT-GLAZE 100 JA 1/16W
R003	401 027 6905	CARBON 750 JA 1/6W	R291	401 068 1600	OXIDE-MT 4.7 JA 2W
R005	401 025 1308	CARBON 150 JA 1/6W	R351	401 105 7404	MT-GLAZE 8.2K JA 1/16W
R006	401 026 8108	CARBON 4.7 JA 1/6W	R352	401 012 7009	CARBON 10K JA 1/4W
R011	401 105 3406	MT-GLAZE 27K JA 1/16W	R354	401 025 8208	CARBON 22K JA 1/6W
R019	401 007 7601	CARBON 150 JA 1/2W	R355	401 013 6407	CARBON 12K JA 1/4W
R029	401 007 7601	CARBON 150 JA 1/2W	R356	401 105 0603	MT-GLAZE 10K JA 1/16W
R041	401 012 5708	CARBON 1K JA 1/4W	R357	401 025 7805	CARBON 2.2K JA 1/6W
R1004	401 027 6608	CARBON 75 JA 1/6W	R358	401 105 7909	MT-GLAZE 0.000 ZA 1/16W
R1011	401 105 0504	MT-GLAZE 1K JA 1/16W	R423	401 020 2904	CARBON 47K JA 1/4W
R1013	401 105 0504	MT-GLAZE 1K JA 1/16W	R423A	401 022 4104	CARBON 68K JA 1/4W
R1014	401 105 0702	MT-GLAZE 100K JA 1/16W	R424	401 024 7004	CARBON 1K JA 1/6W
R103	401 061 8101	OXIDE-MT 39K JA 1W	R426	401 024 7400	CARBON 10K JA 1/6W
R106	401 024 6700	CARBON 100 JA 1/6W	R430	401 105 0504	MT-GLAZE 1K JA 1/16W
R107	401 105 0405	MT-GLAZE 100 JA 1/16W	R432	401 024 7004	CARBON 1K JA 1/6W
R108	401 105 2102	MT-GLAZE 18K JA 1/16W	R433	401 058 3706	OXIDE-MT 1K JA 1W
R109	401 105 8203	MT-GLAZE 68K JA 1/16W	R434	401 059 6706	OXIDE-MT 180 JA 1W
R111	401 105 0504	MT-GLAZE 1K JA 1/16W	R435	402 069 8704	WIRE WOUND 8.2 KA 7W
R112	401 105 6001	MT-GLAZE 5.6K JA 1/16W		402 074 5309	WIRE WOUND 8.2 KA 7W
R114	401 105 4007	MT-GLAZE 330 JA 1/16W		402 098 0700	WIRE WOUND 8.2 KA 7W
R115	401 027 2105	CARBON 56 JA 1/6W	R441	401 064 8702	OXIDE-MT 1K JA 2W
R116	401 105 4403	MT-GLAZE 39 JA 1/16W	R442	401 062 2306	OXIDE-MT 4.7K JA 1W
R130	401 105 7909	MT-GLAZE 0.000 ZA 1/16W	R475	401 009 5803	CARBON 330 JA 1/2W
R132	401 105 5202	MT-GLAZE 470 JA 1/16W	R479	401 105 7404	MT-GLAZE 8.2K JA 1/16W
R140	401 105 5905	MT-GLAZE 560 JA 1/16W	R481	401 067 2509	OXIDE-MT 3.3 JA 2W
R141	401 105 5905	MT-GLAZE 560 JA 1/16W	△R488	402 079 5106	FUSIBLE RES 2.2 J- 1W
R171	401 105 1402	MT-GLAZE 150 JA 1/16W	R510	401 024 7400	CARBON 10K JA 1/6W
R172	401 105 4601	MT-GLAZE 3.9K JA 1/16W	R511	401 024 7400	CARBON 10K JA 1/6W
R173	401 024 7004	CARBON 1K JA 1/6W	R514	401 024 7400	CARBON 10K JA 1/6W
R176	401 105 0603	MT-GLAZE 10K JA 1/16W	R515	401 024 7400	CARBON 10K JA 1/6W
R1902	401 105 2102	MT-GLAZE 18K JA 1/16W	R516	401 026 1307	CARBON 27K JA 1/6W
R1903	401 105 6605	MT-GLAZE 6.8K JA 1/16W		402 084 9106	CARBON 27K JA 1/6W
R1904	401 105 5301	MT-GLAZE 4.7K JA 1/16W	R518	401 058 0606	OXIDE-MT 1.8 JA 1W
R1905	401 105 3307	MT-GLAZE 2.7K JA 1/16W	R519	401 024 5604	CARBON 1 JA 1/6W
R1906	401 105 2805	MT-GLAZE 2.2K JA 1/16W	R522	401 027 5205	CARBON 680 JA 1/6W
R1907	401 026 0607	CARBON 270 JA 1/6W	R524	401 066 0308	OXIDE-MT 180 JA 2W
R1908	401 105 0405	MT-GLAZE 100 JA 1/16W	R527	401 027 3003	CARBON 56K JA 1/6W
R1910	401 105 0405	MT-GLAZE 100 JA 1/16W	R529	401 058 9005	OXIDE-MT 1.2K JA 1W
R1911	401 105 5202	MT-GLAZE 470 JA 1/16W	△R601	401 008 8607	CARBON 220K JA 1/2W
R1912	401 026 9600	CARBON 470 JA 1/6W	R602	402 071 1205	WIRE WOUND 3.9 KA 7W
R211	401 025 1308	CARBON 150 JA 1/6W		402 072 4304	WIRE WOUND 3.9 KA 7W
R212	401 105 1402	MT-GLAZE 150 JA 1/16W		402 098 0601	WIRE WOUND 3.9 KA 7W
R221	401 105 0504	MT-GLAZE 1K JA 1/16W	R611	401 020 0801	CARBON 470 JA 1/4W
			△R613	402 001 8106	FUSIBLE RES 680 J- 1/4W

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
R614	401 025 8208	CARBON 22K JA 1/6W	R840	401 105 4007	MT-GLAZE 330 JA 1/16W
R615	401 025 7409	CARBON 220 JA 1/6W	R841	401 105 5301	MT-GLAZE 4.7K JA 1/16W
R616	401 025 4606	CARBON 18K JA 1/6W	R842	401 105 5301	MT-GLAZE 4.7K JA 1/16W
R619	401 016 1508	CARBON 22 JA 1/4W	R851	401 025 1605	CARBON 1.5K JA 1/6W
R620	401 010 4802	CARBON 470K JA 1/2W	R853	401 027 8602	CARBON 8.2K JA 1/6W
R621	401 010 4802	CARBON 470K JA 1/2W	R855	401 027 8602	CARBON 8.2K JA 1/6W
R622	401 019 9600	CARBON 47 JA 1/4W	R857	401 027 8602	CARBON 8.2K JA 1/6W
R623	401 026 4902	CARBON 330K JA 1/6W	R861	401 105 1501	MT-GLAZE 1.5K JA 1/16W
△R624	402 001 8502	FUSIBLE RES 10 J- 1/2W	R862	401 105 7404	MT-GLAZE 8.2K JA 1/16W
R625	401 069 4501	OXIDE-MT 68K JA 2W	R863	401 105 5301	MT-GLAZE 4.7K JA 1/16W
R626	401 069 4501	OXIDE-MT 68K JA 2W	R866	401 024 6700	CARBON 100 JA 1/6W
R627	401 025 8208	CARBON 22K JA 1/6W	R869	401 024 6700	CARBON 100 JA 1/6W
△R628	402 000 8305	SOLID 5.6M KA 1/2W	R870	401 105 2904	MT-GLAZE 22K JA 1/16W
△R629	402 000 8305	SOLID 5.6M KA 1/2W	R871	401 105 0603	MT-GLAZE 10K JA 1/16W
R631	401 027 0309	CARBON 47K JA 1/6W	R872	401 105 3406	MT-GLAZE 27K JA 1/16W
R632	401 180 8402	OXIDE-MT 0.47 JA 2W	R873	401 105 4205	MT-GLAZE 33K JA 1/16W
R633	401 180 8402	OXIDE-MT 0.47 JA 2W	R875	401 105 0603	MT-GLAZE 10K JA 1/16W
R641	401 024 7400	CARBON 10K JA 1/6W	R876	401 105 6605	MT-GLAZE 6.8K JA 1/16W
R642	401 027 0309	CARBON 47K JA 1/6W	R877	401 105 6001	MT-GLAZE 5.6K JA 1/16W
R643	401 025 4606	CARBON 18K JA 1/6W	R881	401 105 4106	MT-GLAZE 3.3K JA 1/16W
R644	401 025 8208	CARBON 22K JA 1/6W	R882	401 105 4106	MT-GLAZE 3.3K JA 1/16W
R652	401 012 7009	CARBON 10K JA 1/4W	R883	401 105 4205	MT-GLAZE 33K JA 1/16W
R653	645 017 6944	PROTECTOR,1.5A 125V	R886	401 105 2904	MT-GLAZE 22K JA 1/16W
R655	401 012 7009	CARBON 10K JA 1/4W	R888	401 105 5202	MT-GLAZE 470 JA 1/16W
R656	401 060 7402	OXIDE-MT 270 JA 1W	R891	401 105 7305	MT-GLAZE 820 JA 1/16W
R657	401 009 9801	CARBON 3.9K JA 1/2W	R892	401 105 5509	MT-GLAZE 470K JA 1/16W
R658	401 064 5305	OXIDE-MT 1.5 JA 2W	R893	401 105 8005	MT-GLAZE 1M JA 1/16W
R661	401 012 8105	CARBON 100K JA 1/4W	R894	401 105 0405	MT-GLAZE 100 JA 1/16W
R662	401 026 9907	CARBON 4.7K JA 1/6W	R895	401 105 5202	MT-GLAZE 470 JA 1/16W
R663	401 014 6109	CARBON 150K JA 1/4W			
R664	401 060 9307	OXIDE-MT 27K JA 1W	VARIABLE RESISTOR		
R665	401 013 6407	CARBON 12K JA 1/4W	VR651	645 006 5125	VR,SEMI,2K N
R666	401 105 2904	MT-GLAZE 22K JA 1/16W		652 000 0100	VR,SEMI,2K N
R667	401 105 0603	MT-GLAZE 10K JA 1/16W			
R669	401 067 3100	OXIDE-MT 3.9 JA 2W	TRANSFORMER		
R670	401 057 8009	OXIDE-MT 1 JA 1W	T431A	652 001 1144	TRANS,DRIVE
R671	401 105 5301	MT-GLAZE 4.7K JA 1/16W	△T471	652 001 0383	TRANS,FLYBACK
R672	401 024 9701	CARBON 12K JA 1/6W	△T611B	652 001 4381	TRANS,POWER,PULSE
R673	401 105 0702	MT-GLAZE 100K JA 1/16W			
R681	401 105 2904	MT-GLAZE 22K JA 1/16W	COIL		
R682	401 105 6100	MT-GLAZE 560K JA 1/16W	L171	645 053 9015	TRANS,OSC,45.75MHZ
R691	401 105 0603	MT-GLAZE 10K JA 1/16W	L431	610 032 5821	FILTER COIL
R693	401 105 4601	MT-GLAZE 3.9K JA 1/16W		645 008 5628	INDUCTOR,1U M
R694	401 105 0504	MT-GLAZE 1K JA 1/16W	L432	645 002 2364	CORE,PIPE
R695	401 021 4105	CARBON 56K JA 1/4W	L441A	652 000 1312	COIL,LINEARITY
R696	401 105 5400	MT-GLAZE 47K JA 1/16W	L442	652 001 0260	INDUCTOR,265UH
R697	401 105 5400	MT-GLAZE 47K JA 1/16W	△L601	652 001 3162	LINE FILTER
R698	401 105 0504	MT-GLAZE 1K JA 1/16W	L612	645 018 9722	CORE,PIPE
R801	401 105 3505	MT-GLAZE 270K JA 1/16W		652 001 0147	CORE,PIPE
R804	401 105 7909	MT-GLAZE 0.000 ZA 1/16W	L614	645 018 9722	CORE,PIPE
R805	401 105 7909	MT-GLAZE 0.000 ZA 1/16W		652 001 0147	CORE,PIPE
R811	401 105 5400	MT-GLAZE 47K JA 1/16W	L615	645 018 9722	CORE,PIPE
R812	401 105 0603	MT-GLAZE 10K JA 1/16W		652 001 0147	CORE,PIPE
R813	401 105 0603	MT-GLAZE 10K JA 1/16W	L616	645 005 0763	CORE,PIPE
R814	401 105 0603	MT-GLAZE 10K JA 1/16W	△L653	645 017 6944	PROTECTOR,1.5A 125V
R816	401 105 0603	MT-GLAZE 10K JA 1/16W			
R818	401 024 7004	CARBON 1K JA 1/6W	DIODE		
R819	401 105 0603	MT-GLAZE 10K JA 1/16W	D003	407 012 4406	DIODE 1SS133
R830	401 024 7004	CARBON 1K JA 1/6W	D102	407 099 5600	ZENER DIODE MTZJ6.8A
R831	401 026 9600	CARBON 470 JA 1/6W		407 057 4003	ZENER DIODE RD6.8EB1
R832	403 157 3601	CERAMIC 100P J 50V		408 047 8605	ZENER DIODE MTZJ6.8A
R834	401 105 0603	MT-GLAZE 10K JA 1/16W	D103	407 100 0204	ZENER DIODE MTZJ36A
R835	401 105 0603	MT-GLAZE 10K JA 1/16W		407 056 2307	ZENER DIODE RD36EB1
R836	401 105 0603	MT-GLAZE 10K JA 1/16W	D106	407 206 5608	ZENER DIODE UDZS-TE-1710B
R837	401 105 5301	MT-GLAZE 4.7K JA 1/16W	D107	407 206 5608	ZENER DIODE UDZS-TE-1710B
R838	401105 5301	MT-GLAZE 4.7K JA 1/16W	D1201	407 149 0807	DIODE 1SS355-TE-17
R839	401105 4007	MT-GLAZE 330 JA 1/16W	D1202	407 149 0807	DIODE 1SS355-TE-17

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
610 315 1298 ASSY,PWB,CRT F8GP 1AA0B10E694CB			R741	401 020 0801	CARBON 470 JA 1/4W
			R742	401 105 1501	MT-GLAZE 1.5K JA 1/16W
			R744	401 105 1402	MT-GLAZE 150 JA 1/16W
			R751	401 105 7909	MT-GLAZE 0.000 ZA 1/16W
			R752	401 105 0603	MT-GLAZE 10K JA 1/16W
			R753	401 105 0603	MT-GLAZE 10K JA 1/16W
TRANSISTOR			COIL		
Q701	406 000 3605	TR 2SC3620(LB-SAN-1)	L701	645 001 4826	INDUCTOR,180U K
	405 041 6507	TR 2SC2621-D-RA	DIODE		
	405 041 6705	TR 2SC2621-E-RA	D741	407 012 4406	DIODE 1SS133
	405 066 9903	TR 2SC2688(1)-K	D742	407 012 4406	DIODE 1SS133
	405 067 0008	TR 2SC2688(1)-L	D751	407 012 4406	DIODE 1SS133
	405 067 0107	TR 2SC2688(1)-M	D752	407 012 4406	DIODE 1SS133
Q711	406 000 3605	TR 2SC3620(LB-SAN-1)	D753	407 012 4406	DIODE 1SS133
	405 041 6507	TR 2SC2621-D-RA	D754	407 012 4406	DIODE 1SS133
	405 041 6705	TR 2SC2621-E-RA	MISCELLANEOUS		
	405 066 9903	TR 2SC2688(1)-K	△K701	645 026 2005	SOCKET,CRT 8P
	405 067 0008	TR 2SC2688(1)-L		652 001 0321	SOCKET,CRT 8P
	405 067 0107	TR 2SC2688(1)-M		652 001 1465	SOCKET,CRT 8P
Q721	406 000 3605	TR 2SC3620(LB-SAN-1)		652 001 3247	SOCKET,CRT 12P
	405 041 6507	TR 2SC2621-D-RA			
	405 041 6705	TR 2SC2621-E-RA			
	405 066 9903	TR 2SC2688(1)-K			
	405 067 0008	TR 2SC2688(1)-L			
	405 067 0107	TR 2SC2688(1)-M			
Q741	405 134 5905	TR 2SA1037AK-T146-R			
	405 147 2205	TR 2SA1037AK-S-T146			
	405 002 0308	TR 2SA1037K T146 R			
	405 002 0407	TR 2SA1037K T146 S			
	405 002 6706	TR 2SA1179-M6-TB			
	405 002 6904	TR 2SA1179-M7-TB			
	405 163 1503	TR 2SA1179N-M6-TB			
	405 163 2708	TR 2SA1179N-M7-TB			
	405 173 9605	TR 2SA1235A1E			
	405 173 9704	TR 2SA1235A1F			
Q751	405 134 5905	TR 2SA1037AK-T146-R			
	405 147 2205	TR 2SA1037AK-S-T146			
	405 002 0308	TR 2SA1037K T146 R			
	405 002 0407	TR 2SA1037K T146 S			
	405 002 6706	TR 2SA1179-M6-TB			
	405 002 6904	TR 2SA1179-M7-TB			
	405 163 1503	TR 2SA1179N-M6-TB			
	405 163 2708	TR 2SA1179N-M7-TB			
	405 173 9605	TR 2SA1235A1E			
	405 173 9704	TR 2SA1235A1F			
CAPACITOR					
C701	403 157 6602	CERAMIC 470P K 50V			
C711	403 157 6602	CERAMIC 470P K 50V			
C721	403 157 6602	CERAMIC 470P K 50V			
C731	403 077 2807	CERAMIC 1000P Z 2K			
C741	403 049 0008	ELECT 1U M 50V			
C751	403 044 1703	ELECT 470U M 16V			
RESISTOR					
R701	401 105 2706	MT-GLAZE 220 JA 1/16W			
R703	401 105 5202	MT-GLAZE 470 JA 1/16W			
R704	401 065 4604	OXIDE-MT 12K JA 2W			
R705	401 009 1508	CARBON 2.7K JA 1/2W			
R711	401 105 2706	MT-GLAZE 220 JA 1/16W			
R713	401 105 5202	MT-GLAZE 470 JA 1/16W			
R714	401 065 4604	OXIDE-MT 12K JA 2W			
R715	401 009 1508	CARBON 2.7K JA 1/2W			
R721	401 105 2706	MT-GLAZE 220 JA 1/16W			
R723	401 105 5202	MT-GLAZE 470 JA 1/16W			
R724	401 065 4604	OXIDE-MT 12K JA 2W			
R725	401 009 1508	CARBON 2.7K JA 1/2W			
R732	401 015 6504	CARBON 2.2 JA 1/4W			
	402 086 3904	CARBON 2.2 JA 1/4W			



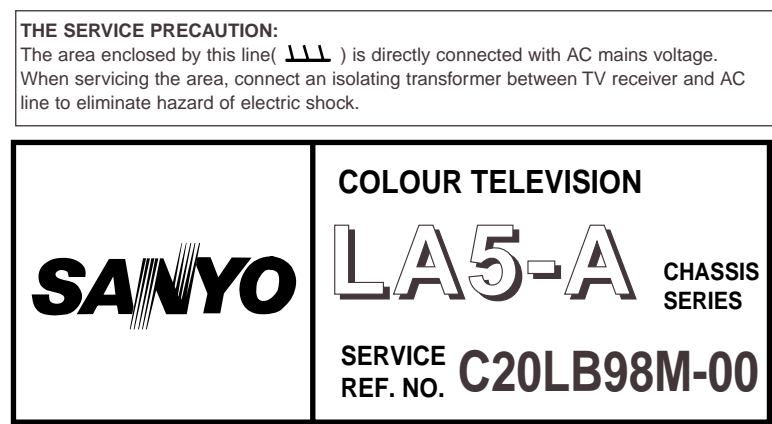

CIRCUIT DIAGRAM NOTICE:

1. All resistance value are in ohms, $K=1,000$, $M=1,000,000$.
2. All resistance rated wattages are 1/6W unless otherwise noted.
3. Excepting electrolytic capacitors, all capacitance values of less than 1 are expressed in μF and more than 1 are pF.
4. All capacitance rated voltages are 50V unless otherwise noted.
5. All inductance values are in μH .
6. Voltage readings take with a "VTVM" are from point indicated chassis ground. Voltage readings taken by using NTSC colour bar signal are with all controls at normal position. Some voltage may vary with signal strength.
7. Waveform were taken with NTSC colour bar and controls adjusted for normal picture. Waveform were taken by using a wide band oscilloscope and a low capacity probe.

This circuit diagram covers a basic or representative chassis only. There may be some components or partial circuit differences between the actual chassis and the circuit diagram.

9. Parts specified with "X" are not installed in this model.
10. Parts specified with "J" are just lumber wires.

Capacitance (Example)

1000 C M 2000 D

- Characteristic Capacitance value (2200pF)
- Allowable error ($\pm 20\%$)
- Kind (Ceramic)
- Rated voltage (1,000V)


Resistance (Example)

1/2 N 1.2

















- Resistance value (1.2 Ω)
- Allowable error ($\pm 5\%$)
- Kind (Metal carbon)
- Rated wattage (1/2W)

Legend:

- J = $\pm 5\%$
- K = $\pm 10\%$
- M = $\pm 20\%$
- T, A, U, D: Electrolytic
- C, K, B: Ceramic
- F: Mylar film
- M, N: Polypropylene
- Z: Metalized paper
- D: Carbon
- N: Metalized carbon
- S: Oxidized metalized
- W: Wire winding
- Solid

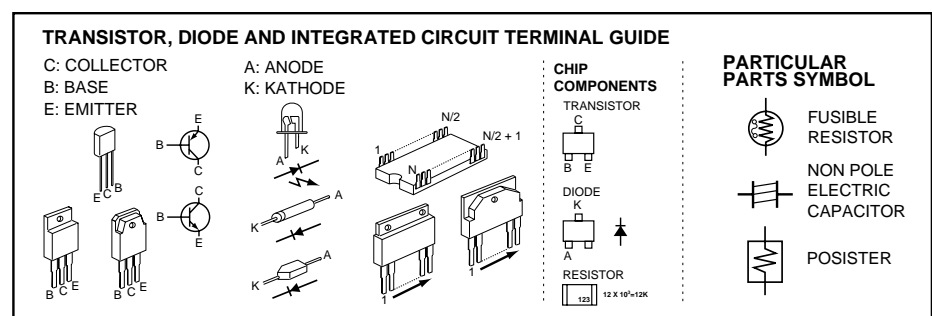

(On the Main Board)

<p>IC201-pin19 <R out></p>  <p>4.6Vp-p</p>	<p>IC201-pin20 <G out></p>  <p>4.6Vp-p</p>	<p>IC201-pin21 <B out></p>  <p>4.5Vp-p</p>	<p>IC201-pin23 <V drive></p>  <p>1.0Vp-p Vert.</p>	<p>IC201-pin27 <H drive></p>  <p>2.2Vp-p Horiz.</p>	<p>IC201-pin40 <Selected V out></p>  <p>2.5Vp-p Horiz.</p>	<p>IC201-pin44 <Internal V in></p>  <p>1.5Vp-p Horiz.</p>
<p>IC201-pin46 <Video out></p>  <p>2.6Vp-p Horiz.</p>	<p>IC201-pin28 <FBP in></p>  <p>4.5Vp-p Horiz.</p>	<p>IC501-pin5 <Vert. out></p>  <p>51.6Vp-p Vert.</p>	<p>IC801-pin17 <Vert. sync></p>  <p>5.1Vp-p Vert.</p>	<p>IC801-pin18 <Horiz. sync></p>  <p>5.4Vp-p Horiz.</p>	<p>Q431-C <Horiz. drive></p>  <p>60.8Vp-p Horiz.</p>	<p>Q432-B <Horiz. out></p>  <p>26.2Vp-p</p>
<p>Q432-C <Horiz. out></p>  <p>1380Vp-p Horiz.</p>	<p>Q613-C <Power out></p>  <p>420Vp-p</p>					

(On the CRT Board)

Q701	Q711	Q721	Q741	Q751
B 2.5V	B 2.5V	B 2.6V	B 0.7V	B 9.2V
C 138.5V	C 140.1V	C 141.9V	C 0V	C 0V
E 2.4V	E 2.3V	E 2.5V	E 1.4V	E 8.9V

Q701-C <B-out>	Q701-B <B drive>	Q711-C <R-out>	Q711-B <R drive>	Q721-C <G-out>	Q721-B <G drive>
108Vp-p	4.3Vp-p	115Vp-p	4.5Vp-p	116Vp-p	4.5Vp-p