



TV-F2500 NH

SERVICE MANUAL

COLOR TELEVISION

- Replace this Service manual with "Revision Publishing" when it is issued.

aiwa

S/M Code No. 09-007-431-9T2

SIMPLE

DATA

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|-----------|---------|----------------|-------|----------------------------|--------|------------|
| X | ACC | | 87-B30-274-010 | 0E | BAT,R6P ATC | NH1M | TV-F2500 |
| O | ACC | | 87-B30-311-010 | 1B | ADAPTOR,300 75 TSN-02 | NH1M | TV-F2500 |
| O | ACC | | 8A-JE7-955-010 | — | RC UNIT,RC-AVT01 | NH1M | TV-F2500 |
| O | APPEAR | | 8A-JE5-007-110 | — | PANEL,MAIN NH | NH1M | TV-F2500 |
| O | APPEAR | | 8A-JE5-009-010 | — | PANEL,REAR NH | NH1M | TV-F2500 |
| X | APPEAR | | 8A-JE5-011-010 | — | CABI,FR NH | NH1M | TV-F2500 |
| O | APPEAR | | 8A-JE5-012-010 | 2E | CABI,FR NH ASSY | NH1M | TV-F2500 |
| O | APPEAR | | 8A-JEH-004-010 | 0E | BTN,POWER 2 | NH1M | TV-F2500 |
| O | APPEAR | | 8Z-JE5-002-110 | 2C | CABI,REAR | NH1M | TV-F2500 |
| X | APPEAR | | 8Z-JE5-201-010 | — | HLDR,SW | NH1M | TV-F2500 |
| O | APPEAR | | 8Z-JE7-003-010 | 1A | KEY,MAIN | NH1M | TV-F2500 |
| O | APPEAR | | 8Z-JE7-005-010 | 0E | LENS,LED | NH1M | TV-F2500 |
| O | APPEAR | | 8Z-JE7-006-010 | 0E | LENS,RC | NH1M | TV-F2500 |
| O | APPEAR | | 8Z-JE7-008-010 | 0E | BADGE,AIWA ST 52.5 | NH1M | TV-F2500 |
| O | AUDIO | | 87-067-688-010 | 0E | BVTT+3-6 | NH1M | TV-F2500 |
| O | AUDIO | C 0401 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0402 | 87-A10-295-080 | 0E | CAP,M 0.01-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0403 | 87-A10-295-080 | 0E | CAP,M 0.01-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0404 | 87-A10-307-080 | 0E | CAP,M 0.1-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0405 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0406 | 87-010-260-080 | 0E | CAP,E 47-25 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0407 | 87-010-197-080 | 0E | C-CAP,S 0.01-25 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0408 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0409 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0410 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0411 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| X | AUDIO | C 0412 | 88-700-559-810 | 0E | CAP,M 470P-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0413 | 87-A10-295-080 | 0E | CAP,M 0.01-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0414 | 87-A10-305-080 | 0E | CAP,M 0.068-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0415 | 87-A10-293-080 | 0E | CAP,M 6800P-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0416 | 87-010-260-080 | 0E | CAP,E 47-25 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0417 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0418 | 87-010-197-080 | 0E | C-CAP,S 0.01-25 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0419 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0420 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0421 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0422 | 87-A10-293-080 | 0E | CAP,M 6800P-50 J | NH1M | TV-F2500 |
| X | AUDIO | C 0423 | 88-700-559-810 | 0E | CAP,M 470P-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0424 | 87-010-260-080 | 0E | CAP,E 47-25 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0425 | 87-A10-305-080 | 0E | CAP,M 0.068-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0426 | 87-A10-295-080 | 0E | CAP,M 0.01-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0427 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0428 | 87-010-189-080 | 0E | C-CAP,S 8200P-50 K B | NH1M | TV-F2500 |
| O | AUDIO | C 0429 | 87-012-365-080 | 0E | C-CAP,S 0.027-25 K B | NH1M | TV-F2500 |
| O | AUDIO | C 0430 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0431 | 87-010-189-080 | 0E | C-CAP,S 8200P-50 K B | NH1M | TV-F2500 |
| O | AUDIO | C 0432 | 87-010-197-080 | 0E | C-CAP,S 0.01-25 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0433 | 87-010-260-080 | 0E | CAP,E 47-25 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0434 | 87-012-365-080 | 0E | C-CAP,S 0.027-25 K B | NH1M | TV-F2500 |
| O | AUDIO | C 0435 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0436 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0437 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0438 | 87-010-178-080 | 0E | C-CAP,S 1000P-50 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0439 | 87-A10-307-080 | 0E | CAP,M 0.1-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0440 | 87-A10-307-080 | 0E | CAP,M 0.1-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0441 | 87-A10-307-080 | 0E | CAP,M 0.1-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0442 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0443 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0444 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0445 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0446 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0447 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0448 | 87-010-197-080 | 0E | C-CAP,S 0.01-25 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0449 | 87-010-402-080 | 0E | CAP,E 2.2-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0450 | 87-010-247-080 | 0E | CAP,E 100-50 M SME | NH1M | TV-F2500 |
| O | AUDIO | C 0451 | 87-010-388-080 | 1A | CAP,E 1000-25 M SME | NH1M | TV-F2500 |
| O | AUDIO | C 0452 | 87-010-388-080 | 1A | CAP,E 1000-25 M SME | NH1M | TV-F2500 |
| O | AUDIO | C 0453 | 87-010-178-080 | 0E | C-CAP,S 1000P-50 K B C2012 | NH1M | TV-F2500 |
| ! | O AUDIO | C 0454 | 87-010-399-090 | 1B | CAP,E 3300-35 M SME | NH1M | TV-F2500 |
| O | AUDIO | C 0455 | 87-010-393-080 | 0E | CAP,E 100-35 M SME | NH1M | TV-F2500 |

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|-----------|---------|----------------|-------|----------------------------|--------|------------|
| O | AUDIO | C 0460 | 87-010-197-080 | 0E | C-CAP,S 0.01-25 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0464 | 87-010-260-080 | 0E | CAP,E 47-25 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0465 | 87-010-178-080 | 0E | C-CAP,S 1000P-50 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0466 | 87-A10-295-080 | 0E | CAP,M 0.01-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0467 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0468 | 87-A10-295-080 | 0E | CAP,M 0.01-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0469 | 87-A10-295-080 | 0E | CAP,M 0.01-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0470 | 87-010-154-080 | 0E | C-CAP,S 10P-50 D CH GRM | NH1M | TV-F2500 |
| O | AUDIO | C 0471 | 87-012-155-080 | 0E | C-CAP,S 180P-50 J CH GRM | NH1M | TV-F2500 |
| O | AUDIO | C 0472 | 87-A10-295-080 | 0E | CAP,M 0.01-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0473 | 87-A10-295-080 | 0E | CAP,M 0.01-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0474 | 87-A10-295-080 | 0E | CAP,M 0.01-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0475 | 87-010-178-080 | 0E | C-CAP,S 1000P-50 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0476 | 87-010-260-080 | 0E | CAP,E 47-25 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0477 | 87-010-316-080 | 0E | C-CAP,S 33P-50 J CH GRM | NH1M | TV-F2500 |
| O | AUDIO | C 0478 | 87-010-316-080 | 0E | C-CAP,S 33P-50 J CH GRM | NH1M | TV-F2500 |
| O | AUDIO | C 0479 | 87-010-318-080 | 0E | C-CAP,S 47P-50 J CH GRM | NH1M | TV-F2500 |
| O | AUDIO | C 0480 | 87-010-316-080 | 0E | C-CAP,S 33P-50 J CH GRM | NH1M | TV-F2500 |
| O | AUDIO | C 0481 | 87-010-316-080 | 0E | C-CAP,S 33P-50 J CH GRM | NH1M | TV-F2500 |
| O | AUDIO | C 0482 | 87-010-196-080 | 0E | C-CAP,S 0.1-25 Z F C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0483 | 87-010-260-080 | 0E | CAP,E 47-25 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0484 | 87-010-197-080 | 0E | C-CAP,S 0.01-25 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0486 | 87-010-197-080 | 0E | C-CAP,S 0.01-25 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0487 | 87-010-196-080 | 0E | C-CAP,S 0.1-25 Z F C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0488 | 87-010-384-080 | 0E | CAP,E 100-25 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0489 | 87-010-197-080 | 0E | C-CAP,S 0.01-25 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0492 | 87-010-197-080 | 0E | C-CAP,S 0.01-25 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0493 | 87-A10-307-080 | 0E | CAP,M 0.1-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0494 | 87-A10-307-080 | 0E | CAP,M 0.1-50 J | NH1M | TV-F2500 |
| O | AUDIO | C 0495 | 87-010-400-080 | 0E | CAP,E 0.47-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0496 | 87-010-400-080 | 0E | CAP,E 0.47-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0497 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0751 | 87-010-545-080 | 0E | CAP,E 0.22-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0752 | 87-010-402-080 | 0E | CAP,E 2.2-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0753 | 87-010-545-080 | 0E | CAP,E 0.22-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0754 | 87-010-402-080 | 0E | CAP,E 2.2-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0755 | 87-010-197-080 | 0E | C-CAP,S 0.01-25 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0756 | 87-010-545-080 | 0E | CAP,E 0.22-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0757 | 87-010-402-080 | 0E | CAP,E 2.2-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0758 | 87-010-545-080 | 0E | CAP,E 0.22-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0759 | 87-010-402-080 | 0E | CAP,E 2.2-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0760 | 87-010-197-080 | 0E | C-CAP,S 0.01-25 K B C2012 | NH1M | TV-F2500 |
| O | AUDIO | C 0761 | 87-010-314-080 | 0E | C-CAP,S 22P-50 J CH GRM | NH1M | TV-F2500 |
| O | AUDIO | C 0762 | 87-010-314-080 | 0E | C-CAP,S 22P-50 J CH GRM | NH1M | TV-F2500 |
| O | AUDIO | C 0763 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0764 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0765 | 87-010-382-080 | 0E | CAP,E 22-25 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0766 | 87-010-402-080 | 0E | CAP,E 2.2-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0767 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0768 | 87-010-402-080 | 0E | CAP,E 2.2-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0769 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0770 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0780 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | AUDIO | C 0781 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| ! | O AUDIO | CN 0401 | 87-009-314-010 | 0E | CONN,8P V 51048 | NH1M | TV-F2500 |
| ! | O AUDIO | CN 0404 | 87-049-469-010 | 0E | CONN,4P V WHT EH | NH1M | TV-F2500 |
| O | AUDIO | CN 0405 | 87-009-317-010 | 0E | CONN,11P V 51048 | NH1M | TV-F2500 |
| ! | O AUDIO | CN 0409 | 87-009-033-010 | 0E | CONN,5P V WHT PH | NH1M | TV-F2500 |
| O | AUDIO | CNA0402 | 8A-JE7-610-010 | 1A | CONN ASSY,6P V WHT AU-MAIN | NH1M | TV-F2500 |
| O | AUDIO | CNA0403 | 8A-JE7-611-010 | 1B | CONN ASSY,11P V WHT AU-VD | NH1M | TV-F2500 |
| O | AUDIO | CNA0408 | 8Z-JE7-663-010 | 0E | CONN ASSY,2P COMB-NK | NH1M | TV-F2500 |
| S | AUDIO | D 0401 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S | AUDIO | D 0402 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S | AUDIO | D 0403 | 87-A40-234-080 | 0E | ZENER,MTZJ5.6A | NH1M | TV-F2500 |
| S | AUDIO | D 0405 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| O | AUDIO | DL 0401 | 87-A91-598-010 | 1H | DELAY LINE,350NS EQFK5-MT | NH1M | TV-F2500 |
| O | AUDIO | FR 0401 | 87-A00-478-090 | 1A | RES,FUSE 2.2-1W J | NH1M | TV-F2500 |
| O | AUDIO | FR 0402 | 87-A00-478-090 | 1A | RES,FUSE 2.2-1W J | NH1M | TV-F2500 |
| X | AUDIO | HT 0404 | 8Z-JB4-640-110 | 1B | HT-SINK,IBW75L70 (F10) | NH1M | TV-F2500 |
| S | AUDIO | IC 0401 | 87-A21-103-040 | 1E | C-IC,MM1454XFBE | NH1M | TV-F2500 |

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|-----------|---------|----------------|-------|--------------------------------|--------|------------|
| S | AUDIO | IC 0402 | 87-A21-022-040 | 1D | C-IC,BA3880FS | NH1M | TV-F2500 |
| S | AUDIO | IC 0403 | 87-A21-554-010 | 1H | IC,TA1216AN | NH1M | TV-F2500 |
| S | AUDIO | IC 0404 | 87-A21-283-010 | 1C | IC,AN5277 | NH1M | TV-F2500 |
| S | AUDIO | IC 0405 | 87-001-536-010 | 1A | IC,NJM78M05FA | NH1M | TV-F2500 |
| S | AUDIO | IC 0406 | 87-A21-220-010 | 1F | IC,MM1311AD | NH1M | TV-F2500 |
| S | AUDIO | IC 0407 | 87-A21-219-010 | 1F | IC,TC90A45P | NH1M | TV-F2500 |
| O | AUDIO | J 0401 | 87-A60-420-010 | 1A | JACK,3.5 ST (MSC) | NH1M | TV-F2500 |
| O | AUDIO | J 0402 | 87-A61-296-010 | 1C | JACK,PIN 3P +S ALL GOLD YKC22- | NH1M | TV-F2500 |
| O | AUDIO | L 0401 | 87-005-614-080 | 0E | COIL,100UH J LAV35 | NH1M | TV-F2500 |
| O | AUDIO | L 0403 | 87-005-614-080 | 0E | COIL,100UH J LAV35 | NH1M | TV-F2500 |
| O | AUDIO | L 0404 | 87-005-614-080 | 0E | COIL,100UH J LAV35 | NH1M | TV-F2500 |
| O | AUDIO | L 0405 | 87-003-284-080 | 0E | COIL,27UH J LAL02 | NH1M | TV-F2500 |
| O | AUDIO | L 0406 | 87-003-284-080 | 0E | COIL,27UH J LAL02 | NH1M | TV-F2500 |
| O | AUDIO | L 0407 | 87-A50-555-010 | 1B | COIL,100UH K 7212M-101K | NH1M | TV-F2500 |
| S | AUDIO | Q 0402 | 89-324-122-080 | 0E | C-TR,2SC2412KR | NH1M | TV-F2500 |
| S | AUDIO | Q 0403 | 89-110-372-080 | 0E | C-TR,2SA1037K(R) | NH1M | TV-F2500 |
| S | AUDIO | Q 0404 | 89-110-372-080 | 0E | C-TR,2SA1037K(R) | NH1M | TV-F2500 |
| S | AUDIO | Q 0405 | 89-324-122-080 | 0E | C-TR,2SC2412KR | NH1M | TV-F2500 |
| S | AUDIO | Q 0408 | 87-A30-062-080 | 0E | C-TR,KRC104S | NH1M | TV-F2500 |
| S | AUDIO | Q 0409 | 89-324-122-080 | 0E | C-TR,2SC2412KR | NH1M | TV-F2500 |
| S | AUDIO | Q 0410 | 89-324-122-080 | 0E | C-TR,2SC2412KR | NH1M | TV-F2500 |
| S | AUDIO | Q 0411 | 89-324-122-080 | 0E | C-TR,2SC2412KR | NH1M | TV-F2500 |
| S | AUDIO | Q 0412 | 89-110-372-080 | 0E | C-TR,2SA1037K(R) | NH1M | TV-F2500 |
| S | AUDIO | Q 0413 | 89-324-122-080 | 0E | C-TR,2SC2412KR | NH1M | TV-F2500 |
| S | AUDIO | Q 0414 | 89-110-372-080 | 0E | C-TR,2SA1037K(R) | NH1M | TV-F2500 |
| S | AUDIO | Q 0415 | 89-324-122-080 | 0E | C-TR,2SC2412KR | NH1M | TV-F2500 |
| S | AUDIO | Q 0416 | 89-110-372-080 | 0E | C-TR,2SA1037K(R) | NH1M | TV-F2500 |
| S | AUDIO | Q 0417 | 89-110-372-080 | 0E | C-TR,2SA1037K(R) | NH1M | TV-F2500 |
| S | AUDIO | Q 0418 | 89-324-122-080 | 0E | C-TR,2SC2412KR | NH1M | TV-F2500 |
| S | AUDIO | Q 0751 | 89-324-122-080 | 0E | C-TR,2SC2412KR | NH1M | TV-F2500 |
| S | AUDIO | Q 0752 | 89-324-122-080 | 0E | C-TR,2SC2412KR | NH1M | TV-F2500 |
| S | AUDIO | Q 0756 | 89-324-122-080 | 0E | C-TR,2SC2412KR | NH1M | TV-F2500 |
| X | AUDIO | R 0401 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0402 | 88-118-183-080 | 0E | C-RES,S 18K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0403 | 88-118-153-080 | 0E | C-RES,S 15K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0404 | 88-118-152-080 | 0E | C-RES,S 1.5K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0405 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0406 | 88-118-183-080 | 0E | C-RES,S 18K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0407 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0408 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0409 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0410 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0411 | 88-118-122-080 | 0E | C-RES,S 1.2K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0412 | 88-118-392-080 | 0E | C-RES,S 3.9K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0413 | 88-118-122-080 | 0E | C-RES,S 1.2K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0414 | 88-118-392-080 | 0E | C-RES,S 3.9K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0415 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0416 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0417 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0418 | 88-121-223-080 | 0E | RES,22K-1/8W J | NH1M | TV-F2500 |
| X | AUDIO | R 0419 | 88-118-223-080 | 0E | C-RES,S 22K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0420 | 88-118-222-080 | 0E | C-RES,S 2.2K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0421 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0422 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0423 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0424 | 88-118-101-080 | 0E | C-RES,S 100-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0425 | 88-118-101-080 | 0E | C-RES,S 100-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0426 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0427 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0428 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0429 | 88-118-473-080 | 0E | C-RES,S 47K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0430 | 88-118-332-080 | 0E | C-RES,S 3.3K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0431 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| O | AUDIO | R 0432 | 87-A00-739-090 | 0E | RES,M/F 1-7W K RSV7 | NH1M | TV-F2500 |
| X | AUDIO | R 0434 | 88-118-223-080 | 0E | C-RES,S 22K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0435 | 88-118-393-080 | 0E | C-RES,S 39K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0436 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0437 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0438 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0439 | 88-118-153-080 | 0E | C-RES,S 15K-1/10W J | NH1M | TV-F2500 |

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|------------|---------|----------------|-------|-------------------------|--------|------------|
| X | AUDIO | R 0440 | 88-118-153-080 | 0E | C-RES,S 15K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0441 | 88-118-152-080 | 0E | C-RES,S 1.5K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0442 | 88-118-152-080 | 0E | C-RES,S 1.5K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0443 | 88-118-222-080 | 0E | C-RES,S 2.2K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0444 | 88-118-222-080 | 0E | C-RES,S 2.2K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0445 | 88-118-223-080 | 0E | C-RES,S 22K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0446 | 88-118-223-080 | 0E | C-RES,S 22K-1/10W J | NH1M | TV-F2500 |
| O | AUDIO | R 0447 | 87-A00-667-090 | 0E | RES,M/F 680-2W J RSF(S) | NH1M | TV-F2500 |
| O | AUDIO | R 0448 | 87-A00-667-090 | 0E | RES,M/F 680-2W J RSF(S) | NH1M | TV-F2500 |
| X | AUDIO | R 0449 | 88-118-223-080 | 0E | C-RES,S 22K-1/10W J | NH1M | TV-F2500 |
| | | | | | | | |
| X | AUDIO | R 0450 | 88-118-823-080 | 0E | C-RES,S 82K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0451 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0452 | 88-118-823-080 | 0E | C-RES,S 82K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0453 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0454 | 88-118-750-080 | 0E | C-RES,S 75-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0455 | 88-118-750-080 | 0E | C-RES,S 75-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0456 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0460 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0461 | 88-118-472-080 | 0E | C-RES,S 4.7K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0462 | 88-118-391-080 | 0E | C-RES,S 390-1/10W J | NH1M | TV-F2500 |
| | | | | | | | |
| X | AUDIO | R 0463 | 88-118-561-080 | 0E | C-RES,S 560-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0464 | 88-118-222-080 | 0E | C-RES,S 2.2K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0465 | 88-118-101-080 | 0E | C-RES,S 100-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0466 | 88-118-101-080 | 0E | C-RES,S 100-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0467 | 88-118-821-080 | 0E | C-RES,S 820-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0468 | 88-118-561-080 | 0E | C-RES,S 560-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0469 | 88-118-561-080 | 0E | C-RES,S 560-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0470 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0471 | 88-118-221-080 | 0E | C-RES,S 220-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0472 | 88-118-271-080 | 0E | C-RES,S 270-1/10W J | NH1M | TV-F2500 |
| | | | | | | | |
| X | AUDIO | R 0473 | 88-118-562-080 | 0E | C-RES,S 5.6K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0474 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0475 | 88-118-681-080 | 0E | C-RES,S 680-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0476 | 88-118-561-080 | 0E | C-RES,S 560-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0477 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0478 | 88-118-221-080 | 0E | C-RES,S 220-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0479 | 88-118-271-080 | 0E | C-RES,S 270-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0480 | 88-118-562-080 | 0E | C-RES,S 5.6K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0482 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0483 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| | | | | | | | |
| X | AUDIO | R 0484 | 88-118-221-080 | 0E | C-RES,S 220-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0485 | 88-118-221-080 | 0E | C-RES,S 220-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0486 | 88-118-221-080 | 0E | C-RES,S 220-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0487 | 88-118-471-080 | 0E | C-RES,S 470-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0488 | 88-118-152-080 | 0E | C-RES,S 1.5K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0489 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0490 | 88-118-562-080 | 0E | C-RES,S 5.6K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0491 | 88-118-122-080 | 0E | C-RES,S 1.2K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0492 | 88-118-222-080 | 0E | C-RES,S 2.2K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0493 | 88-118-750-080 | 0E | C-RES,S 75-1/10W J | NH1M | TV-F2500 |
| | | | | | | | |
| X | AUDIO | R 0494 | 88-118-104-080 | 0E | C-RES,S 100K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0495 | 88-121-472-080 | 0E | RES,4.7K-1/8W J | NH1M | TV-F2500 |
| X | AUDIO | R 0497 | 88-121-822-080 | 0E | RES,8.2K-1/8W J | NH1M | TV-F2500 |
| X | AUDIO | R 0499 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0751 | 88-118-331-080 | 0E | C-RES,S 330-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0752 | 88-118-331-080 | 0E | C-RES,S 330-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0753 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0754 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0755 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0756 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| | | | | | | | |
| X | AUDIO | R 0759 | 88-118-123-080 | 0E | C-RES,S 12K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0760 | 88-118-103-080 | 0E | C-RES,S 10K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0761 | 88-118-102-080 | 0E | C-RES,S 1K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0762 | 88-118-472-080 | 0E | C-RES,S 4.7K-1/10W J | NH1M | TV-F2500 |
| X | AUDIO | R 0763 | 88-121-472-080 | 0E | RES,4.7K-1/8W J | NH1M | TV-F2500 |
| X | AUDIO | R 0764 | 88-121-472-080 | 0E | RES,4.7K-1/8W J | NH1M | TV-F2500 |
| O | AUDIO | W 0401 | 8A-JE7-612-010 | 0E | F-CABLE,8P 2.0 70MM | NH1M | TV-F2500 |
| O | AUDIO | W 0405 | 8A-JE7-613-010 | 0E | F-CABLE,11P 2.0 70MM | NH1M | TV-F2500 |
| ! | O CRT | V | 8A-JE5-608-010 | - | CRT,A60LST196X04(U) | NH1M | TV-F2500 |
| O | DEFLECTION | | 87-067-579-010 | 0E | BVT2+3-8 W/O SL0T | NH1M | TV-F2500 |

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|--------------|---------|----------------|-------|-------------------------------|--------|------------|
| O | DEFLECTION | | 87-067-641-010 | 0E | UTT2+3-8 W/O SLOT BLK | NH1M | TV-F2500 |
| O | DEFLECTION | | 87-067-680-010 | 0E | BVIT3B+3-10 | NH1M | TV-F2500 |
| O | DEFLECTION | | 87-067-758-010 | 0E | BVT2+3-12 W/O SLOT | NH1M | TV-F2500 |
| O | DEFLECTION | | 8Z-JE5-202-010 | 0E | HLDZ,FBT-25 | NH1M | TV-F2500 |
| X | DEFLECTION | | 8Z-JE5-212-010 | — | HT-SINK,H-OUT | NH1M | TV-F2500 |
| X | DEFLECTION | | 8Z-JE7-212-010 | — | PLATE,FOOT | NH1M | TV-F2500 |
| O | DEFLECTION | C 0501 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| X | DEFLECTION | C 0502 | 88-218-542-080 | 0E | CAP,CER 390P-50 K YB | NH1M | TV-F2500 |
| X | DEFLECTION | C 0503 | 88-700-810-810 | 0E | CAP,M 0.01-50 J AMZV | NH1M | TV-F2500 |
| O | DEFLECTION | C 0504 | 87-010-393-080 | 0E | CAP,E 100-35 M SME | NH1M | TV-F2500 |
| O | DEFLECTION | C 0505 | 87-018-131-080 | 0E | CAP,TC U 1000P-50 K B UP050 | NH1M | TV-F2500 |
| X | DEFLECTION | C 0506 | 88-710-389-810 | 0E | CAP,M 0.56-50 J TFL | NH1M | TV-F2500 |
| O | DEFLECTION | C 0508 | 87-010-398-090 | 1B | CAP,E 2200-35 M SME | NH1M | TV-F2500 |
| O | DEFLECTION | C 0509 | 87-A11-245-080 | 0E | CAP,M/P 0.1-100 J TF-ECQV | NH1M | TV-F2500 |
| O | DEFLECTION | C 0510 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| X | DEFLECTION | C 0601 | 88-218-612-080 | 0E | CAP,CER 1000P-50 K YB | NH1M | TV-F2500 |
| X | DEFLECTION | C 0603 | 88-707-939-810 | 0E | CAP,M 0.22-50 J TF | NH1M | TV-F2500 |
| O | DEFLECTION | C 0605 | 87-A10-972-090 | 1B | CAP,M/P 0.015-1.25K H DKRG | NH1M | TV-F2500 |
| O | DEFLECTION | C 0607 | 87-A12-351-090 | 1A | CAP,M/P 0.013-800 H DKRG | NH1M | TV-F2500 |
| O | DEFLECTION | C 0608 | 87-A10-833-010 | 0E | CAP,CER 1000P-2K K R LONG | NH1M | TV-F2500 |
| O | DEFLECTION | C 0609 | 87-A11-278-090 | 1A | CAP,M/P 0.47-250 J ECWF(SR) | NH1M | TV-F2500 |
| O | DEFLECTION | C 0610 | 87-A10-833-010 | 0E | CAP,CER 1000P-2K K R LONG | NH1M | TV-F2500 |
| O | DEFLECTION | C 0611 | 87-010-963-080 | 0E | CAP,E 2.2-160 M 11L SME | NH1M | TV-F2500 |
| ! | O DEFLECTION | C 0612 | 87-010-976-080 | 0E | CAP,CER 1000P-500 K B DD10 | NH1M | TV-F2500 |
| ! | O DEFLECTION | C 0613 | 87-016-373-080 | 1A | CAP,E 10-250 M SME | NH1M | TV-F2500 |
| O | DEFLECTION | C 0614 | 87-010-976-080 | 0E | CAP,CER 1000P-500 K B DD10 | NH1M | TV-F2500 |
| O | DEFLECTION | C 0615 | 87-A10-843-080 | 0E | CAP,CER 680P-1K K R | NH1M | TV-F2500 |
| O | DEFLECTION | C 0616 | 87-A10-843-080 | 0E | CAP,CER 680P-1K K R | NH1M | TV-F2500 |
| O | DEFLECTION | C 0617 | 87-A12-082-090 | 1A | CAP,E 1000-35 SMG | NH1M | TV-F2500 |
| O | DEFLECTION | C 0618 | 87-A10-301-080 | 0E | CAP,M 0.033-50 J | NH1M | TV-F2500 |
| O | DEFLECTION | C 0619 | 87-A11-987-080 | 0E | CAP,CER 6800P-250 K R HR | NH1M | TV-F2500 |
| O | DEFLECTION | C 0620 | 87-010-395-080 | 1A | CAP,E 330-35 M SME | NH1M | TV-F2500 |
| O | DEFLECTION | C 0621 | 87-018-131-080 | 0E | CAP,TC U 1000P-50 K B UP050 | NH1M | TV-F2500 |
| O | DEFLECTION | C 0622 | 87-A11-124-080 | 0E | CAP,TC U 2200P-50 K B | NH1M | TV-F2500 |
| O | DEFLECTION | C 0623 | 87-A12-171-080 | 0E | CAP,E 4.7-50 K SH | NH1M | TV-F2500 |
| O | DEFLECTION | C 0624 | 87-010-975-080 | 0E | CAP,CER 330P-500 K B DD10 | NH1M | TV-F2500 |
| O | DEFLECTION | C 0626 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | DEFLECTION | C 0627 | 87-010-975-080 | 0E | CAP,CER 330P-500 K B DD10 | NH1M | TV-F2500 |
| O | DEFLECTION | C 0629 | 87-A10-469-080 | 0E | CAP,CER 2200P-500 K B DD10 | NH1M | TV-F2500 |
| O | DEFLECTION | C 0630 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | DEFLECTION | C 0631 | 87-010-263-080 | 0E | CAP,E 100-10 M 11L SME | NH1M | TV-F2500 |
| O | DEFLECTION | C 0655 | 87-A11-354-090 | 1B | CAP,E 100-160 M SMG | NH1M | TV-F2500 |
| O | DEFLECTION | CN 0601 | 87-099-762-010 | 1A | CONN,5P V TBL-P BOSS | NH1M | TV-F2500 |
| O | DEFLECTION | CNA0602 | 8Z-JE5-632-010 | 1A | CONN ASSY,5P V WHT TV-NK-1 | NH1M | TV-F2500 |
| O | DEFLECTION | CNA0604 | 8Z-JE5-638-010 | 1A | CONN ASSY,1P FBT-PS | NH1M | TV-F2500 |
| S | DEFLECTION | D 0501 | 87-A40-318-080 | 1A | ZENER,RM26 V1 | NH1M | TV-F2500 |
| S | DEFLECTION | D 0502 | 87-070-092-080 | 0E | DIODE,S5566B | NH1M | TV-F2500 |
| S | DEFLECTION | D 0601 | 87-A40-735-090 | 1A | DIODE,ERC06-15 | NH1M | TV-F2500 |
| S | DEFLECTION | D 0602 | 87-A40-286-080 | 0E | DIODE,RGP10JE-5025 | NH1M | TV-F2500 |
| S | DEFLECTION | D 0603 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S | DEFLECTION | D 0604 | 87-A40-286-080 | 0E | DIODE,RGP10JE-5025 | NH1M | TV-F2500 |
| S | DEFLECTION | D 0605 | 87-A40-001-080 | 0E | ZENER,MT2J12C | NH1M | TV-F2500 |
| S | DEFLECTION | D 0609 | 87-017-593-090 | 1A | DIODE,RGP15J | NH1M | TV-F2500 |
| S | DEFLECTION | D 0611 | 87-A40-286-080 | 0E | DIODE,RGP10JE-5025 | NH1M | TV-F2500 |
| S | DEFLECTION | D 0613 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S | DEFLECTION | D 0614 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S | DEFLECTION | D 0615 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| O | DEFLECTION | FB 0601 | 87-003-223-080 | 0E | F-BEAD, BL02RN2 | NH1M | TV-F2500 |
| O | DEFLECTION | FB 0602 | 87-003-223-080 | 0E | F-BEAD, BL02RN2 | NH1M | TV-F2500 |
| O | DEFLECTION | FR 0601 | 87-029-158-060 | 0E | RES,FUSE 1-1W J | NH1M | TV-F2500 |
| O | DEFLECTION | FR 0608 | 87-A00-628-090 | 1A | RES,FUSE 0.68-1W J RF 1SL12.5 | NH1M | TV-F2500 |
| O | DEFLECTION | FR 0610 | 87-A00-628-090 | 1A | RES,FUSE 0.68-1W J RF 1SL12.5 | NH1M | TV-F2500 |
| X | DEFLECTION | HT 0501 | 8Z-JE7-211-010 | 0E | HT-SINK,V-OUT | NH1M | TV-F2500 |
| X | DEFLECTION | HT 0602 | 8Z-JE5-213-010 | 1B | HT-SINK,ASSY H | NH1M | TV-F2500 |
| X | DEFLECTION | HT 0603 | 8Z-JE7-215-010 | 0E | HT-SINK,PIN | NH1M | TV-F2500 |
| S | DEFLECTION | IC 0501 | 87-A21-456-010 | 1D | IC,LA7833 | NH1M | TV-F2500 |
| S | DEFLECTION | IC 0601 | 87-070-417-010 | 1A | IC,NJM4558DD | NH1M | TV-F2500 |
| O | DEFLECTION | L 0604 | 87-A50-607-080 | 0E | COIL,3.9MH J LHL10 | NH1M | TV-F2500 |
| O | DEFLECTION | L 0606 | 8Z-JE5-621-010 | 1B | COIL,HLC ZJE-5 | NH1M | TV-F2500 |
| O | DEFLECTION | L 0607 | 87-A50-541-010 | 1B | COIL,1MH 1.5AP-P | NH1M | TV-F2500 |

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|--------------|---------|----------------|-------|-------------------------|--------|------------|
| S | DEFLECTION | PR 0601 | 87-A90-764-080 | 0E | PROTECTOR,1.25A 60V491 | NH1M | TV-F2500 |
| S | DEFLECTION | Q 0601 | 89-324-820-080 | 0E | TR,2SC2482 | NH1M | TV-F2500 |
| S | DEFLECTION | Q 0602 | 87-A30-366-010 | 1F | TR,2SD2580 | NH1M | TV-F2500 |
| S | DEFLECTION | Q 0603 | 87-A30-363-010 | 1B | TR,2SD2531 | NH1M | TV-F2500 |
| S | DEFLECTION | Q 0604 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M | TV-F2500 |
| S | DEFLECTION | Q 0605 | 89-110-154-080 | 0E | TR,2SA1015Y | NH1M | TV-F2500 |
| X | DEFLECTION | R 0501 | 88-121-123-080 | 0E | RES,12K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0502 | 88-140-681-080 | 0E | RES,680-1/2W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0503 | 88-121-393-080 | 0E | RES,39K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0505 | 88-121-223-080 | 0E | RES,22K-1/8W J | NH1M | TV-F2500 |
| O | DEFLECTION | R 0506 | 87-A00-143-090 | 0E | RES,M/F 1.0-1W J RSF(S) | NH1M | TV-F2500 |
| O | DEFLECTION | R 0508 | 87-A00-653-090 | 0E | RES,M/F 270-1W J RSF(S) | NH1M | TV-F2500 |
| X | DEFLECTION | R 0509 | 88-121-473-080 | 0E | RES,47K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0510 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0512 | 88-121-332-080 | 0E | RES,3.3K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0602 | 88-121-472-080 | 0E | RES,4.7K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0603 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| O | DEFLECTION | R 0604 | 87-A00-565-090 | 1D | RES,M/F 1.2K-7W J RSU7 | NH1M | TV-F2500 |
| X | DEFLECTION | R 0605 | 88-121-473-080 | 0E | RES,47K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0606 | 88-121-183-080 | 0E | RES,18K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0607 | 88-121-223-080 | 0E | RES,22K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0608 | 88-121-273-080 | 0E | RES,27K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0609 | 88-121-394-080 | 0E | RES,390K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0610 | 88-121-333-080 | 0E | RES,33K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0611 | 88-130-103-080 | 0E | RES,10K-1/4W J | NH1M | TV-F2500 |
| O | DEFLECTION | R 0612 | 87-A00-629-090 | 0E | RES,M/F 5.6-1W J RSF(S) | NH1M | TV-F2500 |
| X | DEFLECTION | R 0613 | 88-140-391-080 | 0E | RES,390-1/2W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0614 | 88-121-393-080 | 0E | RES,39K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0615 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0616 | 88-130-182-080 | 0E | RES,1.8K-1/4W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0617 | 88-130-332-080 | 0E | RES,3.3K-1/4W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0618 | 88-130-123-080 | 0E | RES,12K-1/4W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0619 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0620 | 88-121-223-080 | 0E | RES,22K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0621 | 88-121-223-080 | 0E | RES,22K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0622 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0623 | 88-130-224-080 | 0E | RES,220K-1/4W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0624 | 88-140-332-080 | 0E | RES,3.3K-1/2W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0625 | 88-140-562-080 | 0E | RES,5.6K-1/2W J | NH1M | TV-F2500 |
| O | DEFLECTION | R 0626 | 87-A00-676-090 | 1A | RES,M/F 100-7W J RSV7 | NH1M | TV-F2500 |
| X | DEFLECTION | R 0627 | 88-140-823-080 | 0E | RES,82K-1/2W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0629 | 88-140-682-080 | 0E | RES,6.8K-1/2W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0632 | 88-121-153-080 | 0E | RES,15K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0633 | 88-121-153-080 | 0E | RES,15K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0634 | 88-121-153-080 | 0E | RES,15K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0636 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0637 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | DEFLECTION | R 0638 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| O | DEFLECTION | SFR0501 | 87-024-429-080 | 0E | SFR,1K H RH063MC | NH1M | TV-F2500 |
| O | DEFLECTION | SFR0601 | 87-024-434-080 | 0E | SFR,22K H RH063MC | NH1M | TV-F2500 |
| O | DEFLECTION | SFR0602 | 87-024-429-080 | 0E | SFR,1K H RH063MC | NH1M | TV-F2500 |
| O | DEFLECTION | SFR0603 | 87-A91-856-080 | - | SFR,K 22K H EVM EAS | NH1M | TV-F2500 |
| ! | O DEFLECTION | T 0601 | 8Z-JE5-606-010 | 2B | FBT,D NX-4523 ZJE-5 | NH1M | TV-F2500 |
| ! | O DEFLECTION | T 0602 | 85-JT2-653-010 | 1C | PT,HDT-TV141-2 | NH1M | TV-F2500 |
| X | LBL,POP | | 8A-JE5-971-010 | 1A | LBL,POP NH1 | NH1M | TV-F2500 |
| O | NK | | 87-067-579-010 | 0E | BVT2+3-8 W/O SLO7 | NH1M | TV-F2500 |
| O | NK | | 87-067-641-010 | 0E | UTT2+3-8 W/O SLOT BLK | NH1M | TV-F2500 |
| O | NK | C 0901 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | NK | C 0902 | 87-010-968-080 | 1A | CAP,CER 680P-2K K B | NH1M | TV-F2500 |
| O | NK | C 0903 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | NK | C 0906 | 87-010-400-080 | 0E | CAP,E 0.47-50 M 11L SME | NH1M | TV-F2500 |
| O | NK | C 0907 | 87-010-235-080 | 0E | CAP,E 470-16 M SME | NH1M | TV-F2500 |
| O | NK | C 0908 | 87-A11-108-080 | 0E | CAP,TC U 680P-50 J CH | NH1M | TV-F2500 |
| O | NK | C 0909 | 87-A11-110-080 | 0E | CAP,TC U 820P-50 J CH | NH1M | TV-F2500 |
| O | NK | C 0910 | 87-A11-108-080 | 0E | CAP,TC U 680P-50 J CH | NH1M | TV-F2500 |
| O | NK | C 0911 | 87-A11-106-080 | - | CAP,TC U 560P-50 J CH | NH1M | TV-F2500 |
| O | NK | C 0912 | 87-A11-106-080 | - | CAP,TC U 560P-50 J CH | NH1M | TV-F2500 |
| O | NK | C 0913 | 87-A11-106-080 | - | CAP,TC U 560P-50 J CH | NH1M | TV-F2500 |
| O | NK | C 0914 | 87-A10-052-080 | 0E | CAP,E 2.2-250 | NH1M | TV-F2500 |
| O | NK | C 0915 | 87-010-260-080 | 0E | CAP,E 47-25 M 11L SME | NH1M | TV-F2500 |

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|--------|-----------|---------|----------------|-------|----------------------------|--------|------------|
| O NK | | C 0916 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O NK | | C 0917 | 87-010-970-090 | 1A | CAP,CER 4700P-2K K B DE | NH1M | TV-F2500 |
| O NK | | C 0951 | 87-010-381-080 | 0E | CAP,E 330-16 M SME | NH1M | TV-F2500 |
| O NK | | C 0953 | 87-018-119-080 | 0E | CAP,TC U 100P-50 K B UP050 | NH1M | TV-F2500 |
| O NK | | C 0954 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O NK | | C 0955 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O NK | | C 0956 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O NK | | C 0957 | 87-018-122-080 | 0E | CAP,TC U 180P-50 K B UP050 | NH1M | TV-F2500 |
| O NK | | C 0958 | 87-018-119-080 | 0E | CAP,TC U 100P-50 K B UP050 | NH1M | TV-F2500 |
| O NK | | C 0959 | 87-A10-050-010 | 0E | CAP,CER 4700P-500 K | NH1M | TV-F2500 |
| O NK | | C 0960 | 87-010-221-080 | 0E | CAP,E 470-10 M SME | NH1M | TV-F2500 |
| O NK | | C 0961 | 87-A12-168-080 | 1A | CAP,E 33-160 M SMG | NH1M | TV-F2500 |
| O NK | | C 0962 | 87-A12-010-080 | 0E | CAP,M/P 0.047-250 J ECQE2 | NH1M | TV-F2500 |
| O NK | | C 0963 | 87-A10-283-080 | 0E | CAP,M 1000P-50 J | NH1M | TV-F2500 |
| O NK | | C 0964 | 87-A10-283-080 | 0E | CAP,M 1000P-50 J | NH1M | TV-F2500 |
| O NK | | C 0965 | 87-010-963-080 | 0E | CAP,E 2.2-160 M 11L SME | NH1M | TV-F2500 |
| O NK | | C 0966 | 87-A12-014-080 | 0E | CAP,M/P 0.1-250 J ECQE2 | NH1M | TV-F2500 |
| O NK | | C 0967 | 87-A10-303-080 | 0E | CAP,M 0.047-50 J | NH1M | TV-F2500 |
| O NK | | C 0968 | 87-010-221-080 | 0E | CAP,E 470-10 M SME | NH1M | TV-F2500 |
| ! O NK | | CN 0901 | 87-009-034-010 | 0E | CONN,6P V WHT PH | NH1M | TV-F2500 |
| ! O NK | | CN 0902 | 87-009-195-010 | 0E | CONN,5P V WHT EH | NH1M | TV-F2500 |
| O NK | | CN 0903 | 87-A61-126-080 | 0E | MALE, 1P TP42097 | NH1M | TV-F2500 |
| ! O NK | | CN 0904 | 87-A61-060-080 | 0E | CONN,1P V RED TP00706 | NH1M | TV-F2500 |
| ! O NK | | CN 0951 | 87-009-030-010 | 0E | CONN,2P V WHT PH | NH1M | TV-F2500 |
| ! O NK | | CN 0952 | 87-099-043-010 | 0E | CONN,2P V WHT EH | NH1M | TV-F2500 |
| S NK | | D 0901 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S NK | | D 0902 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S NK | | D 0903 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S NK | | D 0904 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S NK | | D 0905 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S NK | | D 0906 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S NK | | D 0907 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S NK | | D 0908 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S NK | | D 0909 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S NK | | D 0910 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S NK | | D 0951 | 87-A40-927-080 | - | DIODE,1SS119-041 TA | NH1M | TV-F2500 |
| S NK | | D 0952 | 87-A40-927-080 | - | DIODE,1SS119-041 TA | NH1M | TV-F2500 |
| S NK | | D 0953 | 87-A40-927-080 | - | DIODE,1SS119-041 TA | NH1M | TV-F2500 |
| S NK | | D 0954 | 87-A40-927-080 | - | DIODE,1SS119-041 TA | NH1M | TV-F2500 |
| S NK | | D 0955 | 87-A40-927-080 | - | DIODE,1SS119-041 TA | NH1M | TV-F2500 |
| S NK | | D 0956 | 87-A40-503-080 | 0E | ZENER,MTZJ39B | NH1M | TV-F2500 |
| S NK | | D 0957 | 87-A40-503-080 | 0E | ZENER,MTZJ39B | NH1M | TV-F2500 |
| X NK | | HT 0901 | 8Z-JE5-210-010 | 0E | HT-SINK,NECK 1 | NH1M | TV-F2500 |
| X NK | | HT 0902 | 8Z-JE5-210-010 | 0E | HT-SINK,NECK 1 | NH1M | TV-F2500 |
| X NK | | HT 0903 | 8Z-JE5-210-010 | 0E | HT-SINK,NECK 1 | NH1M | TV-F2500 |
| X NK | | HT 0951 | 8Z-JE5-211-010 | 0E | HT-SINK,NECK 2 | NH1M | TV-F2500 |
| X NK | | HT 0952 | 8Z-JE5-211-010 | 0E | HT-SINK,NECK 2 | NH1M | TV-F2500 |
| O NK | | L 0901 | 87-005-608-080 | 0E | COIL,33UH J LAV35 | NH1M | TV-F2500 |
| O NK | | L 0902 | 87-005-608-080 | 0E | COIL,33UH J LAV35 | NH1M | TV-F2500 |
| O NK | | L 0903 | 87-005-608-080 | 0E | COIL,33UH J LAV35 | NH1M | TV-F2500 |
| O NK | | L 0951 | 87-005-482-080 | 0E | COIL,56UH J FLR50 | NH1M | TV-F2500 |
| O NK | | L 0952 | 87-005-481-080 | 0E | COIL,47UH J FLR50 | NH1M | TV-F2500 |
| S NK | | Q 0901 | 87-A30-344-010 | 1B | TR,2SC5147D | NH1M | TV-F2500 |
| S NK | | Q 0902 | 87-A30-344-010 | 1B | TR,2SC5147D | NH1M | TV-F2500 |
| S NK | | Q 0903 | 87-A30-344-010 | 1B | TR,2SC5147D | NH1M | TV-F2500 |
| S NK | | Q 0904 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M | TV-F2500 |
| S NK | | Q 0905 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M | TV-F2500 |
| S NK | | Q 0906 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M | TV-F2500 |
| S NK | | Q 0907 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M | TV-F2500 |
| S NK | | Q 0908 | 87-A30-066-080 | 0E | TR,2SA1175FE | NH1M | TV-F2500 |
| S NK | | Q 0951 | 87-026-462-080 | 0E | TR,2SC1740SRS | NH1M | TV-F2500 |
| S NK | | Q 0952 | 87-A30-216-080 | 0E | TR,2SA933AS(R) | NH1M | TV-F2500 |
| S NK | | Q 0953 | 87-026-462-080 | 0E | TR,2SC1740SRS | NH1M | TV-F2500 |
| S NK | | Q 0954 | 87-026-462-080 | 0E | TR,2SC1740SRS | NH1M | TV-F2500 |
| S NK | | Q 0955 | 89-407-742-080 | 1A | TR,2SD774 | NH1M | TV-F2500 |
| S NK | | Q 0956 | 89-118-370-010 | 1B | TR,2SA1837 | NH1M | TV-F2500 |
| S NK | | Q 0957 | 89-347-930-010 | 1B | TR,2SC4793 | NH1M | TV-F2500 |
| O NK | | R 0901 | 87-A00-242-090 | 0E | RES,M/F 8.2K-3W J RSF(S) | NH1M | TV-F2500 |
| O NK | | R 0902 | 87-A00-242-090 | 0E | RES,M/F 8.2K-3W J RSF(S) | NH1M | TV-F2500 |
| O NK | | R 0903 | 87-A00-242-090 | 0E | RES,M/F 8.2K-3W J RSF(S) | NH1M | TV-F2500 |

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|------------|-----------|---------|----------------|-------|-------------------------------|--------|------------|
| X NK | | R 0904 | 88-144-222-080 | 0E | RES,SD 2.2K-1/2W K | NH1M | TV-F2500 |
| X NK | | R 0905 | 88-144-222-080 | 0E | RES,SD 2.2K-1/2W K | NH1M | TV-F2500 |
| X NK | | R 0906 | 88-144-222-080 | 0E | RES,SD 2.2K-1/2W K | NH1M | TV-F2500 |
| X NK | | R 0907 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0908 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0909 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0910 | 88-121-471-080 | 0E | RES,470-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0911 | 88-121-471-080 | 0E | RES,470-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0912 | 88-121-471-080 | 0E | RES,470-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0913 | 88-121-561-080 | 0E | RES,560-1/8W J | NH1M | TV-F2500 |
| | | | | | | | |
| X NK | | R 0914 | 88-121-561-080 | 0E | RES,560-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0915 | 88-121-561-080 | 0E | RES,560-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0916 | 88-121-680-080 | 0E | RES,68-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0917 | 88-121-680-080 | 0E | RES,68-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0918 | 88-121-680-080 | 0E | RES,68-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0919 | 88-121-820-080 | 0E | RES,82-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0920 | 88-121-820-080 | 0E | RES,82-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0921 | 88-121-820-080 | 0E | RES,82-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0922 | 88-121-101-080 | 0E | RES,100-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0924 | 88-121-270-080 | 0E | RES,27-1/8W J | NH1M | TV-F2500 |
| | | | | | | | |
| X NK | | R 0928 | 88-121-151-080 | 0E | RES,150-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0929 | 88-121-151-080 | 0E | RES,150-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0930 | 88-121-151-080 | 0E | RES,150-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0931 | 88-121-471-080 | 0E | RES,470-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0932 | 88-121-471-080 | 0E | RES,470-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0934 | 88-121-471-080 | 0E | RES,470-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0935 | 88-140-224-080 | 0E | RES,220K-1/2W J | NH1M | TV-F2500 |
| X NK | | R 0936 | 88-121-821-080 | 0E | RES,820-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0937 | 88-121-271-080 | 0E | RES,270-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0938 | 88-121-152-080 | 0E | RES,1.5K-1/8W J | NH1M | TV-F2500 |
| | | | | | | | |
| X NK | | R 0939 | 88-121-152-080 | 0E | RES,1.5K-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0951 | 88-130-561-080 | 0E | RES,560-1/4W J | NH1M | TV-F2500 |
| X NK | | R 0952 | 88-121-101-080 | 0E | RES,100-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0953 | 88-121-222-080 | 0E | RES,2.2K-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0954 | 88-121-101-080 | 0E | RES,100-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0955 | 88-121-122-080 | 0E | RES,1.2K-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0956 | 88-121-182-080 | 0E | RES,1.8K-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0957 | 88-121-391-080 | 0E | RES,390-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0958 | 88-121-333-080 | 0E | RES,33K-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0959 | 88-121-393-080 | 0E | RES,39K-1/8W J | NH1M | TV-F2500 |
| | | | | | | | |
| X NK | | R 0960 | 88-121-682-080 | 0E | RES,6.8K-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0961 | 88-121-271-080 | 0E | RES,270-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0962 | 88-121-152-080 | 0E | RES,1.5K-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0963 | 88-121-104-080 | 0E | RES,100K-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0964 | 88-121-223-080 | 0E | RES,22K-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0965 | 88-121-821-080 | 0E | RES,820-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0966 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X NK | | R 0967 | 88-121-561-080 | 0E | RES,560-1/8W J | NH1M | TV-F2500 |
| O NK | | R 0968 | 87-022-382-090 | 0E | RES,M/F 120-2W J | NH1M | TV-F2500 |
| O NK | | R 0969 | 87-A00-638-080 | 1A | RES,M/F 47-1/2W J SPR | NH1M | TV-F2500 |
| | | | | | | | |
| O NK | | R 0970 | 87-A00-634-080 | 1A | RES,M/F 2.7-1/4W J SPR | NH1M | TV-F2500 |
| O NK | | R 0971 | 87-A00-636-080 | 1A | RES,M/F 560-1/4W J SPR | NH1M | TV-F2500 |
| X NK | | R 0972 | 88-121-183-080 | 0E | RES,18K-1/8W J | NH1M | TV-F2500 |
| O NK | | R 0973 | 87-A00-637-080 | 1A | RES,M/F 1K-1/4W J SPR | NH1M | TV-F2500 |
| O NK | | R 0974 | 87-022-556-090 | 1B | RES,M/F 180-3W J | NH1M | TV-F2500 |
| X NK | | R 0975 | 88-121-183-080 | 0E | RES,18K-1/8W J | NH1M | TV-F2500 |
| O NK | | R 0976 | 87-A00-636-080 | 1A | RES,M/F 560-1/4W J SPR | NH1M | TV-F2500 |
| O NK | | R 0977 | 87-A00-634-080 | 1A | RES,M/F 2.7-1/4W J SPR | NH1M | TV-F2500 |
| O NK | | R 0978 | 87-A00-635-080 | 1A | RES,M/F 47-1/4W J SPR | NH1M | TV-F2500 |
| O NK | | SO 0901 | 8A-JE7-670-010 | 1B | SOCKET,CRT 11P HPS1521-013411 | NH1M | TV-F2500 |
| | | | | | | | |
| O OTHER | | | 83-JT1-217-010 | 0E | SPR-E,EARTH | NH1M | TV-F2500 |
| X OTHER | | | 86-JU1-230-010 | 0E | CUSH-R, 8-8-3 | NH1M | TV-F2500 |
| X OTHER | | | 86-LB2-202-010 | 0E | CLOTH,15-440-0.5 | NH1M | TV-F2500 |
| X OTHER | | | 86-LB2-203-010 | 0E | CLOTH,15-300-0.5 | NH1M | TV-F2500 |
| ! X OTHER | | | 87-069-033-010 | 0E | CABLE,TIE | NH1M | TV-F2500 |
| X OTHER | | | 87-069-036-010 | 0E | CABLE,TIE 146(N) | NH1M | TV-F2500 |
| ! X OTHER | | | 87-JBA-204-010 | 0E | SH, PVC 2-50-1 | NH1M | TV-F2500 |
| O OTHER | | | 8Z-JE5-205-110 | 0E | HLDR,PWB | NH1M | TV-F2500 |
| O OTHER | | | 8Z-JE5-206-010 | 0E | W-P,10.5-20-1 | NH1M | TV-F2500 |
| O OTHERS,E | | | 8A-JE5-625-010 | 1E | COIL,DGC25-F | NH1M | TV-F2500 |

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|-----------|---------|----------------|-------|-----------------------------|--------|------------|
| ! O | OTHERS,E | | 8A-JE5-630-010 | 1C | AC CORD ASSY,NH BLK AJE | NH1M | TV-F2500 |
| O | OTHERS,E | | 8A-JE7-620-010 | 0E | CONN ASSY,2P VM-NK | NH1M | TV-F2500 |
| O | OTHERS,E | | 8Z-JE5-607-110 | 1A | CONN ASSY,1P CRT-GND | NH1M | TV-F2500 |
| O | OTHERS,E | | 8Z-JE5-640-010 | 1B | CONN ASSY,4P SP-25 | NH1M | TV-F2500 |
| ! O | OTHERS,E | | 8Z-JE7-609-010 | 1D | ANODE-CAP,ZJE-7 | NH1M | TV-F2500 |
| ! O | OTHERS,E | | 8Z-JE7-610-010 | 1B | HV-CABLE, 2P ZJE-7FOC-SCR | NH1M | TV-F2500 |
| ! O | OTHERS,E | * | 87-A90-332-010 | 0E | HLDLR,SF-2001 HV CABLE | NH1M | TV-F2500 |
| ! O | OTHERS,E | * | 87-A90-332-010 | 0E | HLDLR,SF-2001 HV CABLE | NH1M | TV-F2500 |
| ! S | OTHERS,E | F 0881 | 87-035-459-010 | 0E | FUSE,5A 250V T 218 | NH1M | TV-F2500 |
| O | OTHERS,E | SP 0401 | 8Z-JB3-620-010 | 2M | SPKR,6*12 8OHM 15W | NH1M | TV-F2500 |
| O | OTHERS,E | | | | | | |
| X | PACKING | SP 0402 | 8Z-JB3-620-010 | 2M | SPKR,6*12 8OHM 15W | NH1M | TV-F2500 |
| X | PACKING | | 87-066-133-010 | 0E | BAG,PV 0.04-75-280 | NH1M | TV-F2500 |
| X | PACKING | | 87-B40-359-010 | 1B | BAG,FOAMED 0.31-1350-1400 | NH1M | TV-F2500 |
| X | PACKING | | 8A-JE5-852-010 | 2M | CTN,PRINTED NH1M | NH1M | TV-F2500 |
| X | PACKING | | 8Z-JE5-852-010 | 1B | CUSHION,BOTTOM M | NH1M | TV-F2500 |
| X | PACKING | | 8Z-JE5-853-010 | 1B | CUSHION, TOP M | NH1M | TV-F2500 |
| X | PLATE | | 87-B40-281-010 | 0E | LBL,BAR-CODE A 35X8 | NH1M | TV-F2500 |
| X | PLATE | | 8A-JE5-008-010 | 0E | LBL,SPEC NH | NH1M | TV-F2500 |
| O | POWER | | 87-067-579-010 | 0E | BVT2+3-8 W/O SL0T | NH1M | TV-F2500 |
| O | POWER | * | 87-067-619-010 | 0E | BVTT+3-12 | NH1M | TV-F2500 |
| O | POWER | | | | | | |
| O | POWER | C 0801 | 87-010-408-080 | 0E | CAP,E 47-50 M 11L SME | NH1M | TV-F2500 |
| O | POWER | C 0802 | 87-018-131-080 | 0E | CAP,TC U 1000P-50 K B UP050 | NH1M | TV-F2500 |
| O | POWER | C 0804 | 87-A10-474-090 | 1A | CAP,PP 0.01-1.25K J PHS | NH1M | TV-F2500 |
| O | POWER | C 0805 | 87-A12-117-010 | 0E | CAP,CER 560P-1K J HR SL | NH1M | TV-F2500 |
| O | POWER | C 0806 | 87-A12-287-090 | 2A | CAP,E 390-400 M SMM | NH1M | TV-F2500 |
| O | POWER | C 0808 | 87-010-384-080 | 0E | CAP,E 100-25 M 11L SME | NH1M | TV-F2500 |
| O | POWER | C 0809 | 87-018-127-080 | 0E | CAP,TC U 470P-50 K B UP050 | NH1M | TV-F2500 |
| O | POWER | C 0810 | 87-018-129-080 | 0E | CAP,TC U 680P-50 K B UP050 | NH1M | TV-F2500 |
| O | POWER | C 0814 | 87-010-260-080 | 0E | CAP,E 47-25 M 11L SME | NH1M | TV-F2500 |
| O | POWER | C 0816 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | POWER | | | | | | |
| O | POWER | C 0817 | 87-010-398-090 | 1B | CAP,E 2200-35 M SME | NH1M | TV-F2500 |
| O | POWER | C 0818 | 87-018-209-080 | 0E | CAP,TC U 0.1-50 Z F UP050 | NH1M | TV-F2500 |
| O | POWER | C 0820 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | POWER | C 0821 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | POWER | C 0822 | 87-018-209-080 | 0E | CAP,TC U 0.1-50 Z F UP050 | NH1M | TV-F2500 |
| O | POWER | C 0824 | 87-010-237-080 | 1A | CAP,E 1000-16 M SME | NH1M | TV-F2500 |
| ! O | POWER | C 0826 | 87-010-976-080 | 0E | CAP,CER 1000P-500 K B DD10 | NH1M | TV-F2500 |
| O | POWER | C 0827 | 87-A12-290-080 | 0E | CAP,CER 220P-2K J SL HR | NH1M | TV-F2500 |
| O | POWER | C 0829 | 87-010-384-080 | 0E | CAP,E 100-25 M 11L SME | NH1M | TV-F2500 |
| O | POWER | C 0831 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | POWER | | | | | | |
| O | POWER | C 0834 | 87-A10-733-090 | 1B | CAP,E 220-160 M SK | NH1M | TV-F2500 |
| O | POWER | C 0835 | 87-A12-292-010 | 0E | CAP,CER 330P-2K J SL HR | NH1M | TV-F2500 |
| O | POWER | C 0838 | 87-010-397-090 | 1A | CAP,E 1000-35 M SME | NH1M | TV-F2500 |
| ! O | POWER | C 0844 | 87-A12-170-010 | 0E | CAP,CER 1000P-4K M E KX | NH1M | TV-F2500 |
| ! O | POWER | C 0845 | 87-A12-170-010 | 0E | CAP,CER 1000P-4K M E KX | NH1M | TV-F2500 |
| O | POWER | C 0846 | 87-A10-207-080 | 0E | CAP,TC U 0.01-50 K B UP050 | NH1M | TV-F2500 |
| ! O | POWER | CN 0807 | 82-481-649-010 | 0E | CONN,2P V VT-50P | NH1M | TV-F2500 |
| O | POWER | CNA0801 | 8A-JE5-619-010 | 1B | CONN ASSY,3P V MAIN-PS | NH1M | TV-F2500 |
| O | POWER | CNA0803 | 8Z-JE5-636-010 | 1B | CONN ASSY,2P PS-MAIN 5V | NH1M | TV-F2500 |
| S | POWER | D 0801 | 87-A40-785-080 | 0E | DIODE,SB040 | NH1M | TV-F2500 |
| S | POWER | | | | | | |
| S | POWER | D 0802 | 87-017-654-060 | 1C | DIODE,GBU6JL6131 | NH1M | TV-F2500 |
| S | POWER | D 0803 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S | POWER | D 0804 | 87-A40-856-080 | 0E | DIODE,UF4007 | NH1M | TV-F2500 |
| S | POWER | D 0805 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S | POWER | D 0807 | 87-A40-286-080 | 0E | DIODE,RGP10JE-5025 | NH1M | TV-F2500 |
| S | POWER | D 0808 | 87-A40-286-080 | 0E | DIODE,RGP10JE-5025 | NH1M | TV-F2500 |
| S | POWER | D 0809 | 87-A40-828-080 | 0E | DIODE,AK 04 | NH1M | TV-F2500 |
| S | POWER | D 0815 | 87-A40-001-080 | 0E | ZENER,MTZJ12C | NH1M | TV-F2500 |
| S | POWER | D 0816 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S | POWER | D 0817 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S | POWER | | | | | | |
| S | POWER | D 0821 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S | POWER | D 0822 | 87-A40-825-090 | 0E | DIODE,RN 1Z | NH1M | TV-F2500 |
| S | POWER | D 0823 | 87-A40-734-010 | 1B | DIODE,FML-G12S | NH1M | TV-F2500 |
| S | POWER | D 0825 | 87-A40-234-080 | 0E | ZENER,MTZJ5.6A | NH1M | TV-F2500 |
| S | POWER | D 0826 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S | POWER | D 0827 | 87-A40-850-090 | 1A | DIODE,RL4A | NH1M | TV-F2500 |
| S | POWER | D 0831 | 87-A40-286-080 | 0E | DIODE,RGP10JE-5025 | NH1M | TV-F2500 |
| S | POWER | D 0832 | 87-A40-001-080 | 0E | ZENER,MTZJ12C | NH1M | TV-F2500 |
| O | POWER | FB 0801 | 87-003-320-080 | 1A | F-BEAD,-9.0 FBR07HA121NB-00 | NH1M | TV-F2500 |
| O | POWER | FB 0802 | 87-003-320-080 | 1A | F-BEAD,-9.0 FBR07HA121NB-00 | NH1M | TV-F2500 |

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|-----------|---------|----------------|-------|------------------------------|--------|------------|
| O | POWER | FB 0803 | 87-003-320-080 | 1A | F-BEAD,-9.0 FBR07HA121NB-00 | NH1M | TV-F2500 |
| O | POWER | FB 0804 | 87-003-320-080 | 1A | F-BEAD,-9.0 FBR07HA121NB-00 | NH1M | TV-F2500 |
| O | POWER | FB 0805 | 87-003-320-080 | 1A | F-BEAD,-9.0 FBR07HA121NB-00 | NH1M | TV-F2500 |
| O | POWER | FB 0806 | 87-003-320-080 | 1A | F-BEAD,-9.0 FBR07HA121NB-00 | NH1M | TV-F2500 |
| O | POWER | FB 0807 | 87-003-320-080 | 1A | F-BEAD,-9.0 FBR07HA121NB-00 | NH1M | TV-F2500 |
| O | POWER | FR 0801 | 87-A00-770-090 | 0E | RES,FUSE 0.1-1W J RF1SL12.5 | NH1M | TV-F2500 |
| X | POWER | HT 0801 | 8A-JE5-641-010 | 1D | HT-SINK,POWER NHAJE-5 | NH1M | TV-F2500 |
| X | POWER | HT 0802 | 8Z-JE7-210-010 | 0E | HT-SINK,BRG | NH1M | TV-F2500 |
| X | POWER | HT 0803 | 87-038-099-010 | 0E | HT-SINK,20DG/W(FE) | NH1M | TV-F2500 |
| S | POWER | IC 0801 | 87-A21-344-010 | 2A | IC,STR-F6656 | NH1M | TV-F2500 |
| S | POWER | IC 0802 | 87-A21-491-010 | 1E | IC,SE125N | NH1M | TV-F2500 |
| S | POWER | IC 0803 | 87-001-536-010 | 1A | IC,NJM78M05FA | NH1M | TV-F2500 |
| S | POWER | IC 0804 | 87-020-969-010 | 1B | IC,NJM78M09FA | NH1M | TV-F2500 |
| S | POWER | IC 0805 | 87-A20-389-010 | 1A | IC,NJM7809FA | NH1M | TV-F2500 |
| O | POWER | L 0801 | 87-A50-636-010 | 1B | COIL,390UH RCH110 | NH1M | TV-F2500 |
| O | POWER | L 0803 | 87-A50-176-080 | 1A | COIL,33UH-PJ87 | NH1M | TV-F2500 |
| ! | O POWER | LF 0803 | 8A-JE7-643-010 | 1B | FLTR,LINE ELF18D286B | NH1M | TV-F2500 |
| S | POWER | PR 0801 | 87-A90-090-080 | 0E | PROTECTOR,1.5A 491SERIES 60V | NH1M | TV-F2500 |
| ! | S POWER | PR 0802 | 87-A90-195-080 | 1A | PROTECTOR,7A 491SERIES 60V | NH1M | TV-F2500 |
| S | POWER | PR 0803 | 87-A90-473-080 | 0E | PROTECTOR,3.5A 491SERIES 60V | NH1M | TV-F2500 |
| ! | O POWER | PS 0801 | 87-A90-717-010 | 1A | P-COUPLER,PC123FY2 | NH1M | TV-F2500 |
| ! | O POWER | PT 0801 | 8A-JE5-622-010 | 1H | PT,U SW AJE-5 | NH1M | TV-F2500 |
| S | POWER | Q 0801 | 89-318-155-080 | 0E | TR,2SC1815GR | NH1M | TV-F2500 |
| S | POWER | Q 0802 | 87-A30-524-080 | 1A | TR,2SC2925-T | NH1M | TV-F2500 |
| S | POWER | Q 0806 | 87-A30-216-080 | 0E | TR,2SA933AS(R) | NH1M | TV-F2500 |
| S | POWER | Q 0811 | 89-110-913-080 | 1A | TR,2SA10910 | NH1M | TV-F2500 |
| O | POWER | R 0802 | 87-A00-160-090 | 0E | RES,M/F 33-2W J RSF(S) | NH1M | TV-F2500 |
| O | POWER | R 0803 | 87-A00-356-090 | 0E | RES,M/F 22-2W J RSS2X | NH1M | TV-F2500 |
| O | POWER | R 0804 | 87-A00-332-090 | 1B | RES,CEM 1-10W J RGC | NH1M | TV-F2500 |
| O | POWER | R 0805 | 87-A00-170-090 | 0E | RES,M/F 82K-3W J RSF(S) | NH1M | TV-F2500 |
| O | POWER | R 0806 | 87-A00-749-090 | 0E | RES,M/F 33K-5W J RSS5 | NH1M | TV-F2500 |
| X | POWER | R 0807 | 88-130-220-080 | 0E | RES,22-1/4W J | NH1M | TV-F2500 |
| X | POWER | R 0808 | 88-121-152-080 | 0E | RES,1.5K-1/8W J | NH1M | TV-F2500 |
| X | POWER | R 0809 | 88-121-272-080 | 0E | RES,2.7K-1/8W J | NH1M | TV-F2500 |
| X | POWER | R 0810 | 88-121-681-080 | 0E | RES,680-1/8W J | NH1M | TV-F2500 |
| O | POWER | R 0811 | 87-A00-646-090 | 0E | RES,CEM 0.1-5W K RGC5 | NH1M | TV-F2500 |
| X | POWER | R 0812 | 88-121-562-080 | 0E | RES,5.6K-1/8W J | NH1M | TV-F2500 |
| X | POWER | R 0813 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| O | POWER | R 0824 | 87-A00-315-090 | 0E | RES,M/F 1K-1W J RSF(S) | NH1M | TV-F2500 |
| X | POWER | R 0827 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | POWER | R 0828 | 88-121-563-080 | 0E | RES,56K-1/8W J | NH1M | TV-F2500 |
| X | POWER | R 0829 | 88-121-123-080 | 0E | RES,12K-1/8W J | NH1M | TV-F2500 |
| X | POWER | R 0830 | 88-121-123-080 | 0E | RES,12K-1/8W J | NH1M | TV-F2500 |
| O | POWER | R 0833 | 87-A00-199-090 | 0E | RES,M/F 12K-3W J RSF(S) | NH1M | TV-F2500 |
| O | POWER | R 0834 | 87-A00-223-090 | 0E | RES,M/F 47K-2W J RSF(S) | NH1M | TV-F2500 |
| X | POWER | R 0835 | 88-121-392-080 | 0E | RES,3.9K-1/8W J | NH1M | TV-F2500 |
| X | POWER | R 0836 | 88-121-392-080 | 0E | RES,3.9K-1/8W J | NH1M | TV-F2500 |
| X | POWER | R 0840 | 88-121-153-080 | 0E | RES,15K-1/8W J | NH1M | TV-F2500 |
| X | POWER | R 0841 | 88-121-224-080 | 0E | RES,220K-1/8W J | NH1M | TV-F2500 |
| X | POWER | R 0843 | 88-140-332-080 | 0E | RES,3.3K-1/2W J | NH1M | TV-F2500 |
| O | POWER | R 0844 | 87-A00-254-090 | 1B | RES,M/F 0.68-2W J | NH1M | TV-F2500 |
| X | POWER | R 0845 | 88-140-102-080 | 0E | RES,1K-1/2W J | NH1M | TV-F2500 |
| X | POWER | R 0846 | 88-140-562-080 | 0E | RES,5.6K-1/2W J | NH1M | TV-F2500 |
| O | POWER | R 0848 | 87-A00-332-090 | 1B | RES,CEM 1-10W J RGC | NH1M | TV-F2500 |
| ! | O POWER | RY 0801 | 87-A91-390-010 | 1B | RELAY,AC12V G5PA-1-8 | NH1M | TV-F2500 |
| ! | O POWER | S 0801 | 87-A91-410-010 | 1B | SW,AC PUSH 1-1-1 ESB92SH1B | NH1M | TV-F2500 |
| ! | O POWER | TH 0801 | 87-A90-759-010 | 1B | POS-THMS,PTH451C272BF300N270 | NH1M | TV-F2500 |
| X | PRINTS | | 87-B40-086-010 | 0E | BAG,PV 0.04-230-400 PL | NH1M | TV-F2500 |
| X | PRINTS | | 87-B50-066-010 | 0E | LIST,FACILITY(B)-TOKYO | NH1M | TV-F2500 |
| O | PRINTS | | 8A-JE5-904-010 | 1A | IB,NH (ES) -F2500/ 2100 | NH1M | TV-F2500 |
| ! | O PS | C 0881 | 87-A11-353-010 | - | CAP,M/P 0.22-275 M ECQUL | NH1M | TV-F2500 |
| ! | O PS | C 0882 | 87-A12-170-010 | 0E | CAP,CER 1000P-4K M E KX | NH1M | TV-F2500 |
| ! | O PS | C 0883 | 87-A11-353-010 | - | CAP,M/P 0.22-275 M ECQUL | NH1M | TV-F2500 |
| ! | O PS | C 0885 | 87-A12-170-010 | 0E | CAP,CER 1000P-4K M E KX | NH1M | TV-F2500 |
| O | PS | C 0887 | 87-A12-347-090 | 1B | CAP,E 560-50 M LXV | NH1M | TV-F2500 |
| O | PS | CN 0881 | 87-A61-299-010 | 1B | CONN,4P B 5-VB | NH1M | TV-F2500 |
| ! | O PS | CN 0882 | 87-099-674-010 | 0E | CONN,2P V VA | NH1M | TV-F2500 |
| O | PS | CN 0883 | 87-A61-126-080 | 0E | MALE, 1P TP42097 | NH1M | TV-F2500 |
| O | PS | CN 0884 | 87-A60-937-010 | 0E | CONN,2P V VH | NH1M | TV-F2500 |
| O | PS | CN 0885 | 87-A61-126-080 | 0E | MALE, 1P TP42097 | NH1M | TV-F2500 |

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|---------------|-----------|---------|----------------|-------|-----------------------------|--------|------------|
| O PS | | D 0881 | 87-A90-965-010 | 1A | VRIS,TNR15G471K | NH1M | TV-F2500 |
| S PS | | D 0882 | 87-A40-553-080 | 0E | DIODE,1N4003 LES | NH1M | TV-F2500 |
| S PS | | D 0883 | 87-A40-553-080 | 0E | DIODE,1N4003 LES | NH1M | TV-F2500 |
| S PS | | D 0884 | 87-A40-553-080 | 0E | DIODE,1N4003 LES | NH1M | TV-F2500 |
| S PS | | D 0885 | 87-A40-553-080 | 0E | DIODE,1N4003 LES | NH1M | TV-F2500 |
| O PS | | FC 0881 | 87-033-213-080 | 0E | FUSE CLAMP,PFC5000 | NH1M | TV-F2500 |
| O PS | | FC 0882 | 87-033-213-080 | 0E | FUSE CLAMP,PFC5000 | NH1M | TV-F2500 |
| ! O PS | | LF 0881 | 87-A91-804-010 | 1B | FLTR,LINE PLH10A1612R1P02B1 | NH1M | TV-F2500 |
| ! O PS | | LF 0882 | 87-A91-888-010 | 1B | FLTR,LINE ELF21V022A | NH1M | TV-F2500 |
| ! O PS | | PT 0882 | 8A-JE7-624-010 | 1E | PT,NH ZTP3446 (STBY) | NH1M | TV-F2500 |
| O PS | | R 0881 | 87-A00-543-080 | 1A | RES,SD 8.2M-1W J RCR60 | NH1M | TV-F2500 |
| X PS | | R 0882 | 88-144-684-080 | 0E | RES,SD 680K-1/2W K | NH1M | TV-F2500 |
| X PWB | | * | 8A-JE7-632-010 | 1H | PWB,MAIN NH FT | NH1M | TV-F2500 |
| X PWB,B | | | 8A-JE5-634-010 | - | PWB,AUDIO | NH1M | TV-F2500 |
| X PWB,B | | * | 8A-JE5-633-010 | 1E | PWB,COMB B NH | NH1M | TV-F2500 |
| X PWB,B | | * | 8A-JE5-635-010 | - | PWB,PS | NH1M | TV-F2500 |
| X PWB,B | | * | 8A-JE5-636-010 | - | PWB,NK-VM | NH1M | TV-F2500 |
| X PWB,B | | * | 8A-JE5-637-010 | - | PWB,S-JK | NH1M | TV-F2500 |
| X PWB,B OTHER | | C 0884 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X PWB,B OTHER | | C 0886 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X PWB,B OTHER | | CLP0701 | 87-A60-884-010 | 0E | PIN,DIAL COATING-SHS | NH1M | TV-F2500 |
| X PWB,B OTHER | | CLP0881 | 87-A60-884-010 | 0E | PIN,DIAL COATING-SHS | NH1M | TV-F2500 |
| X PWB,B OTHER | | CLP0882 | 87-A60-884-010 | 0E | PIN,DIAL COATING-SHS | NH1M | TV-F2500 |
| X PWB,B OTHER | | CLP0883 | 87-A60-884-010 | 0E | PIN,DIAL COATING-SHS | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0201 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0202 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0203 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0204 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0205 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0206 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0207 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0208 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0305 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0306 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0307 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0308 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0401 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0402 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0403 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | EY 0404 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X PWB,B OTHER | | L 0402 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X PWB,B OTHER | | R 0925 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X PWB,B OTHER | | R 0926 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X PWB,B OTHER | | R 0927 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X PWB,OTHER | | C 0111 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X PWB,OTHER | | C 0813 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X PWB,OTHER | | C 0842 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X PWB,OTHER | | C 0843 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X PWB,OTHER | | CLP0001 | 87-A60-884-010 | 0E | PIN,DIAL COATING-SHS | NH1M | TV-F2500 |
| X PWB,OTHER | | CLP0002 | 87-A60-884-010 | 0E | PIN,DIAL COATING-SHS | NH1M | TV-F2500 |
| X PWB,OTHER | | CLP0003 | 87-A60-884-010 | 0E | PIN,DIAL COATING-SHS | NH1M | TV-F2500 |
| X PWB,OTHER | | CLP0004 | 87-A60-884-010 | 0E | PIN,DIAL COATING-SHS | NH1M | TV-F2500 |
| X PWB,OTHER | | CLP0005 | 87-A60-884-010 | 0E | PIN,DIAL COATING-SHS | NH1M | TV-F2500 |
| X PWB,OTHER | | CLP0009 | 87-A60-884-010 | 0E | PIN,DIAL COATING-SHS | NH1M | TV-F2500 |
| X PWB,OTHER | | D 0806 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0001 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0002 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0003 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0004 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0005 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0006 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0007 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0008 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0009 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0010 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0011 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0012 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0013 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0014 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X PWB,OTHER | | EY 0015 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|-----------|---------|----------------|-------|----------------------------|--------|------------|
| X | PWB,OTHER | EY 0016 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0017 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0018 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0019 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0020 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0021 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0024 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0025 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0026 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0027 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| | | | | | | | |
| X | PWB,OTHER | EY 0029 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0030 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0031 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0032 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0033 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0034 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0035 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0036 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0037 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0038 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| | | | | | | | |
| X | PWB,OTHER | EY 0039 | 81-JT1-216-010 | 0E | EYELET,1.6-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0101 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0102 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0103 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0104 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0105 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0106 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0107 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0108 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0109 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| | | | | | | | |
| X | PWB,OTHER | EY 0110 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0111 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0112 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0116 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0117 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0118 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0119 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0120 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0121 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0122 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| | | | | | | | |
| X | PWB,OTHER | EY 0123 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0124 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | EY 0125 | 81-JT1-215-010 | 0E | EYELET2.0-3.0 | NH1M | TV-F2500 |
| X | PWB,OTHER | FB 0001 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X | PWB,OTHER | FB 0002 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X | PWB,OTHER | FB 0003 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X | PWB,OTHER | FB 0004 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X | PWB,OTHER | FB 0005 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X | PWB,OTHER | FB 0006 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X | PWB,OTHER | R 0101 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| | | | | | | | |
| X | PWB,OTHER | R 0102 | 88-100-000-010 | 0E | PLATING-JW, 0.58 SN95 | NH1M | TV-F2500 |
| X | PWB,OTHER | W 0001 | 89-961-223-410 | 0E | WIRE,U22H1-22-5 | NH1M | TV-F2500 |
| O | S-JK | C 0771 | 87-010-322-080 | 0E | C-CAP,S 100P-50 J CH GRM | NH1M | TV-F2500 |
| O | S-JK | C 0772 | 87-010-197-080 | 0E | C-CAP,S 0.01-25 K B C2012 | NH1M | TV-F2500 |
| O | S-JK | CNA0771 | 8Z-JE5-631-010 | 1B | CONN ASSY,5P S-JK | NH1M | TV-F2500 |
| O | S-JK | J 0771 | 87-A61-174-010 | 1B | JACK,Y/CYKF51-5558 | NH1M | TV-F2500 |
| X | S-JK | R 0771 | 88-118-750-080 | 0E | C-RES,S 75-1/10W J | NH1M | TV-F2500 |
| X | S-JK | R 0772 | 88-118-750-080 | 0E | C-RES,S 75-1/10W J | NH1M | TV-F2500 |
| X | S-JK | R 0773 | 88-118-104-080 | 0E | C-RES,S 100K-1/10W J | NH1M | TV-F2500 |
| O | SCREW | | 86-LBB-206-010 | 0E | S-SCREW,ASSY TV5-40 W20 | NH1M | TV-F2500 |
| | | | | | | | |
| O | SCREW | | 87-067-680-010 | 0E | BVIT3B+3-10 | NH1M | TV-F2500 |
| O | SCREW | | 87-067-690-010 | 0E | BVIT3B+3-12 BLK | NH1M | TV-F2500 |
| O | SCREW | | 87-067-822-010 | 0E | BVT2+3-20 W/O SL0T | NH1M | TV-F2500 |
| O | SCREW | | 87-067-844-010 | 0E | BVT2+4-16 BLK | NH1M | TV-F2500 |
| O | SCREW | | 87-078-070-010 | 0E | BVIT3B+4-12 | NH1M | TV-F2500 |
| O | SCREW | | 87-B10-311-010 | 0E | BVIT3B+3-10 BLK | NH1M | TV-F2500 |
| O | SYSICON | C 0001 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | SYSICON | C 0002 | 87-018-209-080 | 0E | CAP,TC U 0.1-50 Z F UP050 | NH1M | TV-F2500 |
| O | SYSICON | C 0003 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | SYSICON | C 0004 | 87-018-127-080 | 0E | CAP,TC U 470P-50 K B UP050 | NH1M | TV-F2500 |

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|-----------|---------|----------------|-------|-----------------------------|--------|------------|
| O | SYSCON | C 0005 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| O | SYSCON | C 0006 | 87-018-209-080 | 0E | CAP,TC U 0.1-50 Z F UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0007 | 87-010-248-080 | 0E | CAP,E 220-10 M 11L SME | NH1M | TV-F2500 |
| O | SYSCON | C 0008 | 87-018-123-080 | 0E | CAP,TC U 220P-50 K B UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0009 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| O | SYSCON | C 0010 | 87-018-131-080 | 0E | CAP,TC U 1000P-50 K B UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0011 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0012 | 87-018-119-080 | 0E | CAP,TC U 100P-50 K B UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0013 | 87-018-119-080 | 0E | CAP,TC U 100P-50 K B UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0014 | 87-010-263-080 | 0E | CAP,E 100-10 M 11L SME | NH1M | TV-F2500 |
| O | SYSCON | C 0015 | 87-018-119-080 | 0E | CAP,TC U 100P-50 K B UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0016 | 87-018-131-080 | 0E | CAP,TC U 1000P-50 K B UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0017 | 87-018-128-080 | 0E | CAP,TC U 560P-50 K B UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0018 | 87-018-109-080 | 0E | CAP,TC U 22P-50 J SL UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0019 | 87-018-109-080 | 0E | CAP,TC U 22P-50 J SL UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0020 | 87-018-119-080 | 0E | CAP,TC U 100P-50 K B UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0021 | 87-018-109-080 | 0E | CAP,TC U 22P-50 J SL UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0022 | 87-018-109-080 | 0E | CAP,TC U 22P-50 J SL UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0023 | 87-018-123-080 | 0E | CAP,TC U 220P-50 K B UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0024 | 87-018-209-080 | 0E | CAP,TC U 0.1-50 Z F UP050 | NH1M | TV-F2500 |
| O | SYSCON | C 0025 | 87-018-119-080 | 0E | CAP,TC U 100P-50 K B UP050 | NH1M | TV-F2500 |
| ! | O | CN 0001 | 87-009-195-010 | 0E | CONN,5P V WHT EH | NH1M | TV-F2500 |
| | O | D 0001 | 87-070-110-010 | 0E | LED,SLP-181B-51 RED | NH1M | TV-F2500 |
| S | SYSCON | D 0004 | 87-017-932-080 | 0E | ZENER,MTZJ6.2B | NH1M | TV-F2500 |
| S | SYSCON | D 0005 | 87-017-932-080 | 0E | ZENER,MTZJ6.2B | NH1M | TV-F2500 |
| S | SYSCON | D 0008 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| S | SYSCON | D 0009 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M | TV-F2500 |
| O | SYSCON | FB 0007 | 87-008-372-080 | 0E | FLTR,EMI BL01 RN1 | NH1M | TV-F2500 |
| O | SYSCON | HL 0001 | 84-LB3-216-010 | 0E | HLDR,LED | NH1M | TV-F2500 |
| S | SYSCON | IC 0001 | 8A-JE7-623-010 | 2M | IC,M37272MA-055SP | NH1M | TV-F2500 |
| O | SYSCON | IC 0002 | 87-A91-538-010 | 1B | RCR UNIT,SBX1981-72P | NH1M | TV-F2500 |
| S | SYSCON | IC 0003 | 87-A21-378-010 | 1A | IC,S-24C04BDP-1A | NH1M | TV-F2500 |
| S | SYSCON | IC 0004 | 87-A20-611-080 | 0E | IC,M51943BSL-700A | NH1M | TV-F2500 |
| O | SYSCON | L 0002 | 87-005-614-080 | 0E | COIL,100UH J LAV35 | NH1M | TV-F2500 |
| O | SYSCON | L 0003 | 87-005-614-080 | 0E | COIL,100UH J LAV35 | NH1M | TV-F2500 |
| S | SYSCON | Q 0001 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M | TV-F2500 |
| S | SYSCON | Q 0002 | 87-026-269-080 | 0E | TR,DTA114ES | NH1M | TV-F2500 |
| S | SYSCON | Q 0003 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M | TV-F2500 |
| S | SYSCON | Q 0004 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M | TV-F2500 |
| S | SYSCON | Q 0005 | 87-A30-066-080 | 0E | TR,2SA1175FE | NH1M | TV-F2500 |
| X | SYSCON | R 0001 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0002 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0003 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0004 | 88-121-472-080 | 0E | RES,4.7K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0005 | 88-121-822-080 | 0E | RES,8.2K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0006 | 88-121-473-080 | 0E | RES,47K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0007 | 88-121-101-080 | 0E | RES,100-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0008 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0009 | 88-121-272-080 | 0E | RES,2.7K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0010 | 88-121-271-080 | 0E | RES,270-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0011 | 88-121-222-080 | 0E | RES,2.2K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0012 | 88-121-222-080 | 0E | RES,2.2K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0013 | 88-121-332-080 | 0E | RES,3.3K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0014 | 88-121-562-080 | 0E | RES,5.6K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0015 | 88-121-822-080 | 0E | RES,8.2K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0016 | 88-121-223-080 | 0E | RES,22K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0017 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0018 | 88-121-392-080 | 0E | RES,3.9K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0019 | 88-121-223-080 | 0E | RES,22K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0020 | 88-121-471-080 | 0E | RES,470-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0021 | 88-121-272-080 | 0E | RES,2.7K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0022 | 88-121-105-080 | 0E | RES,1M-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0023 | 88-121-682-080 | 0E | RES,6.8K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0024 | 88-121-473-080 | 0E | RES,47K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0025 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0026 | 88-121-222-080 | 0E | RES,2.2K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0027 | 88-121-271-080 | 0E | RES,270-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0028 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0029 | 88-121-473-080 | 0E | RES,47K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0030 | 88-121-473-080 | 0E | RES,47K-1/8W J | NH1M | TV-F2500 |

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|-----------|---------|----------------|-------|----------------------------|--------|------------|
| X | SYSCON | R 0031 | 88-121-223-080 | 0E | RES,22K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0032 | 88-121-101-080 | 0E | RES,100-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0033 | 88-121-101-080 | 0E | RES,100-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0034 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0035 | 88-121-271-080 | 0E | RES,270-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0036 | 88-121-473-080 | 0E | RES,47K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0037 | 88-121-681-080 | 0E | RES,680-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0040 | 88-121-101-080 | 0E | RES,100-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0041 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0042 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M | TV-F2500 |
| | | | | | | | |
| X | SYSCON | R 0043 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0044 | 88-121-473-080 | 0E | RES,47K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0047 | 88-121-332-080 | 0E | RES,3.3K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0050 | 88-121-223-080 | 0E | RES,22K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0051 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0052 | 88-121-471-080 | 0E | RES,470-1/8W J | NH1M | TV-F2500 |
| X | SYSCON | R 0053 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| O | SYSCON | S 0002 | 87-A91-525-080 | 0E | SW,TACT SKQNLA | NH1M | TV-F2500 |
| O | SYSCON | S 0003 | 87-A91-525-080 | 0E | SW,TACT SKQNLA | NH1M | TV-F2500 |
| O | SYSCON | S 0004 | 87-A91-525-080 | 0E | SW,TACT SKQNLA | NH1M | TV-F2500 |
| | | | | | | | |
| O | SYSCON | S 0005 | 87-A91-525-080 | 0E | SW,TACT SKQNLA | NH1M | TV-F2500 |
| O | SYSCON | S 0006 | 87-A91-525-080 | 0E | SW,TACT SKQNLA | NH1M | TV-F2500 |
| O | SYSCON | S 0007 | 87-A91-525-080 | 0E | SW,TACT SKQNLA | NH1M | TV-F2500 |
| X | SYSCON | SH 0001 | 8Z-JBR-210-010 | 0E | SHLD-CASE,MICRO | NH1M | TV-F2500 |
| O | SYSCON | X 0001 | 87-A70-124-080 | 1A | VIB,CER 8.0MHZ | NH1M | TV-F2500 |
| O | TUNER | C 0101 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | TUNER | C 0104 | 87-010-248-080 | 0E | CAP,E 220-10 M 11L SME | NH1M | TV-F2500 |
| O | TUNER | C 0105 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | TUNER | C 0106 | 87-A10-207-080 | 0E | CAP,TC U 0.01-50 K B UP050 | NH1M | TV-F2500 |
| O | TUNER | C 0112 | 87-018-109-080 | 0E | CAP,TC U 22P-50 J SL UP050 | NH1M | TV-F2500 |
| | | | | | | | |
| O | TUNER | C 0113 | 87-018-109-080 | 0E | CAP,TC U 22P-50 J SL UP050 | NH1M | TV-F2500 |
| O | TUNER | C 0201 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | TUNER | C 0202 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | TUNER | C 0203 | 87-010-400-080 | 0E | CAP,E 0.47-50 M 11L SME | NH1M | TV-F2500 |
| O | TUNER | C 0204 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | TUNER | C 0205 | 87-010-237-080 | 1A | CAP,E 1000-16 M SME | NH1M | TV-F2500 |
| O | TUNER | C 0206 | 87-A10-287-080 | 0E | CAP,M 2200P-50 J | NH1M | TV-F2500 |
| O | TUNER | C 0207 | 87-010-400-080 | 0E | CAP,E 0.47-50 M 11L SME | NH1M | TV-F2500 |
| O | TUNER | C 0208 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | TUNER | C 0209 | 87-010-385-080 | 0E | CAP,E 220-25 M SME | NH1M | TV-F2500 |
| | | | | | | | |
| O | TUNER | C 0210 | 87-A11-080-080 | 0E | CAP,TC U 47P-50 J CH | NH1M | TV-F2500 |
| O | TUNER | C 0211 | 87-A11-080-080 | 0E | CAP,TC U 47P-50 J CH | NH1M | TV-F2500 |
| O | TUNER | C 0212 | 87-A11-080-080 | 0E | CAP,TC U 47P-50 J CH | NH1M | TV-F2500 |
| O | TUNER | C 0213 | 87-A11-082-080 | 0E | CAP,TC U 56P-50 J CH | NH1M | TV-F2500 |
| O | TUNER | C 0214 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | TUNER | C 0229 | 87-018-149-080 | 0E | CAP,TC U 15P-50 J CH UP050 | NH1M | TV-F2500 |
| O | TUNER | C 0720 | 87-015-464-080 | 1A | CAP,E 4.7-16 BP | NH1M | TV-F2500 |
| O | TUNER | C 0721 | 87-A10-292-080 | 0E | CAP,M 5600P-50 J | NH1M | TV-F2500 |
| O | TUNER | C 0722 | 87-A10-296-080 | 0E | CAP,M 0.012-50 J | NH1M | TV-F2500 |
| O | TUNER | C 0723 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| | | | | | | | |
| O | TUNER | C 0724 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | TUNER | C 0725 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | TUNER | C 0726 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | TUNER | C 0727 | 87-010-112-080 | 0E | CAP,E 100-16 M 11L SME | NH1M | TV-F2500 |
| O | TUNER | C 0728 | 87-015-464-080 | 1A | CAP,E 4.7-16 BP | NH1M | TV-F2500 |
| O | TUNER | C 0729 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | TUNER | C 0730 | 87-015-464-080 | 1A | CAP,E 4.7-16 BP | NH1M | TV-F2500 |
| O | TUNER | C 0731 | 87-A10-288-080 | 0E | CAP,M 2700P-50 J | NH1M | TV-F2500 |
| X | TUNER | C 0732 | 88-700-859-810 | 0E | CAP,M 0.047-50 J | NH1M | TV-F2500 |
| O | TUNER | C 0733 | 87-016-301-080 | 1A | CAP,TN 3.3-16 K DN | NH1M | TV-F2500 |
| | | | | | | | |
| O | TUNER | C 0734 | 87-015-464-080 | 1A | CAP,E 4.7-16 BP | NH1M | TV-F2500 |
| O | TUNER | C 0735 | 87-016-302-080 | 1A | CAP,TN 10-16 K DN | NH1M | TV-F2500 |
| O | TUNER | C 0736 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| O | TUNER | CF 0201 | 84-LB3-626-080 | 1A | FLTR,TPS4.5MB2 | NH1M | TV-F2500 |
| O | TUNER | CF 0202 | 84-LB3-627-080 | 1A | FLTR,SFSH 4.5MDB SIF | NH1M | TV-F2500 |
| O | TUNER | CNA0101 | 8Z-JE5-637-010 | 1A | CONN ASSY,1P PS-MAIN | NH1M | TV-F2500 |
| S | TUNER | D 0101 | 87-002-743-080 | 0E | ZENER,MTZJ33B | NH1M | TV-F2500 |
| S | TUNER | IC 0102 | 87-001-536-010 | 1A | IC,NJM78M05FA | NH1M | TV-F2500 |
| S | TUNER | IC 0701 | 8Z-JBH-605-010 | 2A | IC,CXA2104S | NH1M | TV-F2500 |
| O | TUNER | L 0101 | 87-005-614-080 | 0E | COIL,100UH J LAV35 | NH1M | TV-F2500 |

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|-----------|---------|----------------|-------|------------------------------|--------|------------|
| O | TUNER | L 0201 | 8Z-JBR-612-010 | 1A | COIL,SIF 4.5MHZ 504BN | NH1M | TV-F2500 |
| O | TUNER | L 0203 | 87-005-612-080 | 0E | COIL,68UH J LAV35 | NH1M | TV-F2500 |
| O | TUNER | L 0204 | 87-003-282-080 | 0E | COIL,12UH J LAL02 | NH1M | TV-F2500 |
| O | TUNER | L 0205 | 8Z-JBH-610-010 | 1A | COIL,PIF-SQ57EL349A 45.75MHZ | NH1M | TV-F2500 |
| O | TUNER | L 0206 | 87-005-614-080 | 0E | COIL,100UH J LAV35 | NH1M | TV-F2500 |
| O | TUNER | L 0207 | 87-003-147-080 | 0E | COIL,22UH J LAL02 | NH1M | TV-F2500 |
| O | TUNER | L 0208 | 87-003-143-080 | 0E | COIL,4.7UH K LAL02 | NH1M | TV-F2500 |
| O | TUNER | L 0701 | 87-005-614-080 | 0E | COIL,100UH J LAV35 | NH1M | TV-F2500 |
| S | TUNER | Q 0201 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M | TV-F2500 |
| S | TUNER | Q 0202 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M | TV-F2500 |
| X | TUNER | R 0103 | 88-121-271-080 | 0E | RES,270-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0108 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0109 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0201 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0202 | 88-121-123-080 | 0E | RES,12K-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0203 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0204 | 88-121-391-080 | 0E | RES,390-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0205 | 88-121-471-080 | 0E | RES,470-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0207 | 88-121-101-080 | 0E | RES,100-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0208 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0209 | 88-121-222-080 | 0E | RES,2.2K-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0210 | 88-121-271-080 | 0E | RES,270-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0211 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0212 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0213 | 88-121-222-080 | 0E | RES,2.2K-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0214 | 88-121-561-080 | 0E | RES,560-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0216 | 88-121-471-080 | 0E | RES,470-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0221 | 88-121-562-080 | 0E | RES,5.6K-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0716 | 88-121-561-080 | 0E | RES,560-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0717 | 88-121-821-080 | 0E | RES,820-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0719 | 88-121-101-080 | 0E | RES,100-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0720 | 88-121-101-080 | 0E | RES,100-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0721 | 88-121-104-080 | 0E | RES,100K-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0722 | 88-121-105-080 | 0E | RES,1M-1/8W J | NH1M | TV-F2500 |
| O | TUNER | R 0723 | 87-A00-130-080 | 0E | RES,M/F 62K-1/6W F | NH1M | TV-F2500 |
| X | TUNER | R 0728 | 88-121-332-080 | 0E | RES,3.3K-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0729 | 88-121-302-080 | 0E | RES,3K-1/8W J | NH1M | TV-F2500 |
| X | TUNER | R 0730 | 88-121-392-080 | 0E | RES,3.9K-1/8W J | NH1M | TV-F2500 |
| X | TUNER | SH 0201 | 84-LB3-680-110 | 0E | SHLD,IF-T | NH1M | TV-F2500 |
| O | TUNER | SWF0201 | 8Z-JBH-633-010 | 1B | FLTR,SAW M1969M | NH1M | TV-F2500 |
| X | TUNER | TP 0101 | 87-033-144-010 | 0E | PIN,DIAL LONG | NH1M | TV-F2500 |
| O | TUNER | TU 0101 | 8Z-JBE-610-010 | 2B | TU UNIT,USA ENV56D74G3 | NH1M | TV-F2500 |
| O | TV | C 0301 | 87-010-403-080 | 0E | CAP,E 3.3-50 M 11L SME | NH1M | TV-F2500 |
| O | TV | C 0302 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | TV | C 0305 | 87-018-126-080 | 0E | CAP,TC U 390P-50 K B UP050 | NH1M | TV-F2500 |
| O | TV | C 0306 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | TV | C 0307 | 87-A10-299-080 | 0E | CAP,M 0.022-50 J | NH1M | TV-F2500 |
| O | TV | C 0308 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| O | TV | C 0309 | 87-018-147-080 | 0E | CAP,TC U 10P-50 J CH UP050 | NH1M | TV-F2500 |
| X | TV | C 0310 | 88-121-472-080 | 0E | RES,4.7K-1/8W J | NH1M | TV-F2500 |
| O | TV | C 0311 | 87-018-209-080 | 0E | CAP,TC U 0.1-50 Z F UP050 | NH1M | TV-F2500 |
| O | TV | C 0312 | 87-018-209-080 | 0E | CAP,TC U 0.1-50 Z F UP050 | NH1M | TV-F2500 |
| O | TV | C 0313 | 87-018-209-080 | 0E | CAP,TC U 0.1-50 Z F UP050 | NH1M | TV-F2500 |
| O | TV | C 0314 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | TV | C 0315 | 87-018-123-080 | 0E | CAP,TC U 220P-50 K B UP050 | NH1M | TV-F2500 |
| X | TV | C 0316 | 88-707-008-810 | 1A | CAP,M 1-50 J MT | NH1M | TV-F2500 |
| O | TV | C 0317 | 87-010-402-080 | 0E | CAP,E 2.2-50 M 11L SME | NH1M | TV-F2500 |
| O | TV | C 0318 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | TV | C 0319 | 87-010-237-080 | 1A | CAP,E 1000-16 M SME | NH1M | TV-F2500 |
| O | TV | C 0321 | 87-010-404-080 | 0E | CAP,E 4.7-50 M 11L SME | NH1M | TV-F2500 |
| O | TV | C 0322 | 87-A10-295-080 | 0E | CAP,M 0.01-50 J | NH1M | TV-F2500 |
| O | TV | C 0323 | 87-016-280-080 | 0E | CAP,E 3.3-50 M BP SME | NH1M | TV-F2500 |
| O | TV | C 0324 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | TV | C 0325 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | TV | C 0326 | 87-A10-307-080 | 0E | CAP,M 0.1-50 J | NH1M | TV-F2500 |
| O | TV | C 0327 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | TV | C 0328 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M | TV-F2500 |
| O | TV | C 0329 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | TV | C 0330 | 87-010-401-080 | 0E | CAP,E 1-50 M 11L SME | NH1M | TV-F2500 |
| O | TV | C 0331 | 87-010-544-080 | 0E | CAP,E 0.1-50 M 11L SME | NH1M | TV-F2500 |

PARTS LIST

! =  SAFETY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|-----------|---------|------------|-----------------|-------------|-----------------------------|---------------|
| O | TV | C | 0332 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M TV-F2500 |
| O | TV | C | 0333 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M TV-F2500 |
| O | TV | C | 0334 | 87-018-209-080 | 0E | CAP,TC U 0.1-50 Z F UP050 | NH1M TV-F2500 |
| O | TV | C | 0335 | 87-015-997-090 | 1A | CAP,E 2200-16 M SME | NH1M TV-F2500 |
| O | TV | C | 0336 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M TV-F2500 |
| O | TV | C | 0337 | 87-018-130-080 | 0E | CAP,TC U 820P-50 K B UP050 | NH1M TV-F2500 |
| O | TV | C | 0338 | 87-010-405-080 | 0E | CAP,E 10-50 M 11L SME | NH1M TV-F2500 |
| O | TV | C | 0339 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M TV-F2500 |
| O | TV | C | 0340 | 87-018-118-080 | 0E | CAP,TC U 82P-50 J B UP050 | NH1M TV-F2500 |
| O | TV | C | 0341 | 87-018-118-080 | 0E | CAP,TC U 82P-50 J B UP050 | NH1M TV-F2500 |
| O | TV | C | 0342 | 87-018-150-080 | 0E | CAP,TC U 18P-50 J CH UP050 | NH1M TV-F2500 |
| O | TV | C | 0343 | 87-A10-307-080 | 0E | CAP,M 0.1-50 J | NH1M TV-F2500 |
| O | TV | C | 0344 | 87-A10-307-080 | 0E | CAP,M 0.1-50 J | NH1M TV-F2500 |
| S | TV | D | 0301 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M TV-F2500 |
| S | TV | D | 0302 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M TV-F2500 |
| S | TV | D | 0303 | 87-020-465-080 | 0E | DIODE,1SS133 | NH1M TV-F2500 |
| S | TV | D | 0304 | 87-A40-235-080 | 0E | ZENER,MTZJ9.1C | NH1M TV-F2500 |
| S | TV | D | 0305 | 87-A40-690-080 | 0E | ZENER,MTZJ11B | NH1M TV-F2500 |
| S | TV | D | 0306 | 87-A40-286-080 | 0E | DIODE,RGP10JE-5025 | NH1M TV-F2500 |
| S | TV | D | 0308 | 87-A40-348-080 | 0E | ZENER,MTZJ3.3A | NH1M TV-F2500 |
| S | TV | D | 0309 | 87-A40-235-080 | 0E | ZENER,MTZJ9.1C | NH1M TV-F2500 |
| S | TV | D | 0310 | 87-A40-235-080 | 0E | ZENER,MTZJ9.1C | NH1M TV-F2500 |
| S | TV | D | 0311 | 87-A40-235-080 | 0E | ZENER,MTZJ9.1C | NH1M TV-F2500 |
| S | TV | D | 0313 | 87-A40-235-080 | 0E | ZENER,MTZJ9.1C | NH1M TV-F2500 |
| O | TV | FB | 0301 | 87-003-320-080 | 1A | F-BEAD,-9.0 FBR07HA121NB-00 | NH1M TV-F2500 |
| S | TV | IC | 0301 | 82Z-JBJ-605-010 | 2P | IC,TA1268N | NH1M TV-F2500 |
| O | TV | L | 0301 | 87-003-097-080 | 0E | COIL,1.0UH K LAL02 | NH1M TV-F2500 |
| O | TV | L | 0302 | 87-005-614-080 | 0E | COIL,100UH J LAV35 | NH1M TV-F2500 |
| O | TV | L | 0303 | 87-005-614-080 | 0E | COIL,100UH J LAV35 | NH1M TV-F2500 |
| O | TV | L | 0304 | 87-003-282-080 | 0E | COIL,12UH J LAL02 | NH1M TV-F2500 |
| S | TV | Q | 0301 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M TV-F2500 |
| S | TV | Q | 0303 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M TV-F2500 |
| S | TV | Q | 0304 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M TV-F2500 |
| S | TV | Q | 0305 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M TV-F2500 |
| S | TV | Q | 0306 | 87-026-219-080 | 0E | TR,DTA144ES | NH1M TV-F2500 |
| S | TV | Q | 0307 | 87-026-218-080 | 0E | TR,DTC144ES | NH1M TV-F2500 |
| S | TV | Q | 0309 | 87-A30-066-080 | 0E | TR,2SA1175FE | NH1M TV-F2500 |
| S | TV | Q | 0310 | 87-026-218-080 | 0E | TR,DTC144ES | NH1M TV-F2500 |
| S | TV | Q | 0311 | 87-A30-066-080 | 0E | TR,2SA1175FE | NH1M TV-F2500 |
| X | TV | R | 0301 | 88-121-273-080 | 0E | RES,27K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0303 | 88-121-472-080 | 0E | RES,4.7K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0304 | 88-121-222-080 | 0E | RES,2.2K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0305 | 88-121-332-080 | 0E | RES,3.3K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0306 | 88-121-562-080 | 0E | RES,5.6K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0307 | 88-121-332-080 | 0E | RES,3.3K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0308 | 88-121-563-080 | 0E | RES,56K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0309 | 88-121-222-080 | 0E | RES,2.2K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0310 | 88-121-223-080 | 0E | RES,22K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0311 | 88-121-182-080 | 0E | RES,1.8K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0312 | 88-121-101-080 | 0E | RES,100-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0313 | 88-121-472-080 | 0E | RES,4.7K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0314 | 88-121-683-080 | 0E | RES,68K-1/8W J | NH1M TV-F2500 |
| O | TV | R | 0315 | 87-025-380-080 | 0E | RES,M/F 15K-1/6W F | NH1M TV-F2500 |
| O | TV | R | 0316 | 87-025-427-080 | 0E | RES,M/F 27K-1/6W F | NH1M TV-F2500 |
| X | TV | R | 0317 | 88-121-682-080 | 0E | RES,6.8K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0320 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0321 | 88-121-272-080 | 0E | RES,2.7K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0322 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0324 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0325 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0326 | 88-121-473-080 | 0E | RES,47K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0327 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0328 | 88-121-272-080 | 0E | RES,2.7K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0329 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0330 | 88-121-272-080 | 0E | RES,2.7K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0331 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0332 | 88-121-272-080 | 0E | RES,2.7K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0333 | 88-121-152-080 | 0E | RES,1.5K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0334 | 88-121-472-080 | 0E | RES,4.7K-1/8W J | NH1M TV-F2500 |
| X | TV | R | 0335 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M TV-F2500 |

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.


Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.


K NO. = Only use japanese.

| ! C | UNIT NAME | REF NO. | PARTS CODE | K NO. | DESCRIPTION | SUFFIX | MODEL NAME |
|-----|-----------|---------|----------------|-------|----------------------------|--------|------------|
| X | TV | R 0337 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0339 | 88-130-471-080 | 0E | RES,470-1/4W J | NH1M | TV-F2500 |
| X | TV | R 0342 | 88-121-272-080 | 0E | RES,2.7K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0343 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0344 | 88-121-472-080 | 0E | RES,4.7K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0345 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0346 | 88-121-152-080 | 0E | RES,1.5K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0347 | 88-121-331-080 | 0E | RES,330-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0348 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0350 | 88-121-392-080 | 0E | RES,3.9K-1/8W J | NH1M | TV-F2500 |
| | | | | | | | |
| X | TV | R 0351 | 88-130-181-080 | 0E | RES,180-1/4W J | NH1M | TV-F2500 |
| X | TV | R 0353 | 88-121-472-080 | 0E | RES,4.7K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0354 | 88-121-472-080 | 0E | RES,4.7K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0356 | 88-121-104-080 | 0E | RES,100K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0360 | 88-121-683-080 | 0E | RES,68K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0361 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0362 | 88-121-331-080 | 0E | RES,330-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0363 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0373 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0374 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M | TV-F2500 |
| | | | | | | | |
| X | TV | R 0378 | 88-121-331-080 | 0E | RES,330-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0379 | 88-121-561-080 | 0E | RES,560-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0380 | 88-121-103-080 | 0E | RES,10K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0381 | 88-121-562-080 | 0E | RES,5.6K-1/8W J | NH1M | TV-F2500 |
| X | TV | R 0382 | 88-121-222-080 | 0E | RES,2.2K-1/8W J | NH1M | TV-F2500 |
| O | TV | X 0301 | 87-A70-007-080 | 1B | VIB,XTAL 3.58MHZ AQC-1001 | NH1M | TV-F2500 |
| O | TV | X 0302 | 87-030-327-010 | 0E | VIB,CER 503.500KHZ CSB F30 | NH1M | TV-F2500 |
| O | VIDEO | C 0714 | 87-010-221-080 | 0E | CAP,E 470-10 M SME | NH1M | TV-F2500 |
| O | VIDEO | C 0737 | 87-018-134-080 | 0E | CAP,TC U 0.01-16 N Y UP050 | NH1M | TV-F2500 |
| O | VIDEO | C 0738 | 87-A10-307-080 | 0E | CAP,M 0.1-50 J | NH1M | TV-F2500 |
| | | | | | | | |
| O | VIDEO | CN 0701 | 87-A60-628-010 | 0E | CONN,11P V 2MM JMT | NH1M | TV-F2500 |
| O | VIDEO | CN 0702 | 87-009-265-010 | 1A | CONN,11P V 52147 | NH1M | TV-F2500 |
| ! | O VIDEO | CN 0705 | 87-009-262-010 | 0E | CONN,8P V 52147 | NH1M | TV-F2500 |
| ! | O VIDEO | CN 0706 | 87-099-186-010 | 0E | CONN,6P V WHT EH | NH1M | TV-F2500 |
| O | VIDEO | CNA0704 | 8A-JE5-617-010 | 1B | CONN ASSY,6P V WHT TV-NK-2 | NH1M | TV-F2500 |
| O | VIDEO | J 0702 | 87-A60-324-110 | 1B | JACK,PIN 6P Y-W-R W/SW | NH1M | TV-F2500 |
| S | VIDEO | Q 0706 | 87-A30-065-080 | 0E | TR,2SC2785FE | NH1M | TV-F2500 |
| X | VIDEO | R 0706 | 88-121-750-080 | 0E | RES,75-1/8W J | NH1M | TV-F2500 |
| X | VIDEO | R 0707 | 88-121-823-080 | 0E | RES,82K-1/8W J | NH1M | TV-F2500 |
| X | VIDEO | R 0708 | 88-121-823-080 | 0E | RES,82K-1/8W J | NH1M | TV-F2500 |
| | | | | | | | |
| X | VIDEO | R 0711 | 88-121-104-080 | 0E | RES,100K-1/8W J | NH1M | TV-F2500 |
| X | VIDEO | R 0712 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | VIDEO | R 0713 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | VIDEO | R 0718 | 88-121-750-080 | 0E | RES,75-1/8W J | NH1M | TV-F2500 |
| X | VIDEO | R 0724 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | VIDEO | R 0725 | 88-121-104-080 | 0E | RES,100K-1/8W J | NH1M | TV-F2500 |
| X | VIDEO | R 0726 | 88-121-102-080 | 0E | RES,1K-1/8W J | NH1M | TV-F2500 |
| X | VIDEO | R 0727 | 88-121-104-080 | 0E | RES,100K-1/8W J | NH1M | TV-F2500 |
| X | VIDEO | R 0731 | 88-130-151-080 | 0E | RES,150-1/4W J | NH1M | TV-F2500 |
| X | VIDEO | R 0732 | 88-121-221-080 | 0E | RES,220-1/8W J | NH1M | TV-F2500 |


SCHEMATIC DIAGRAM - 1 (MAIN)

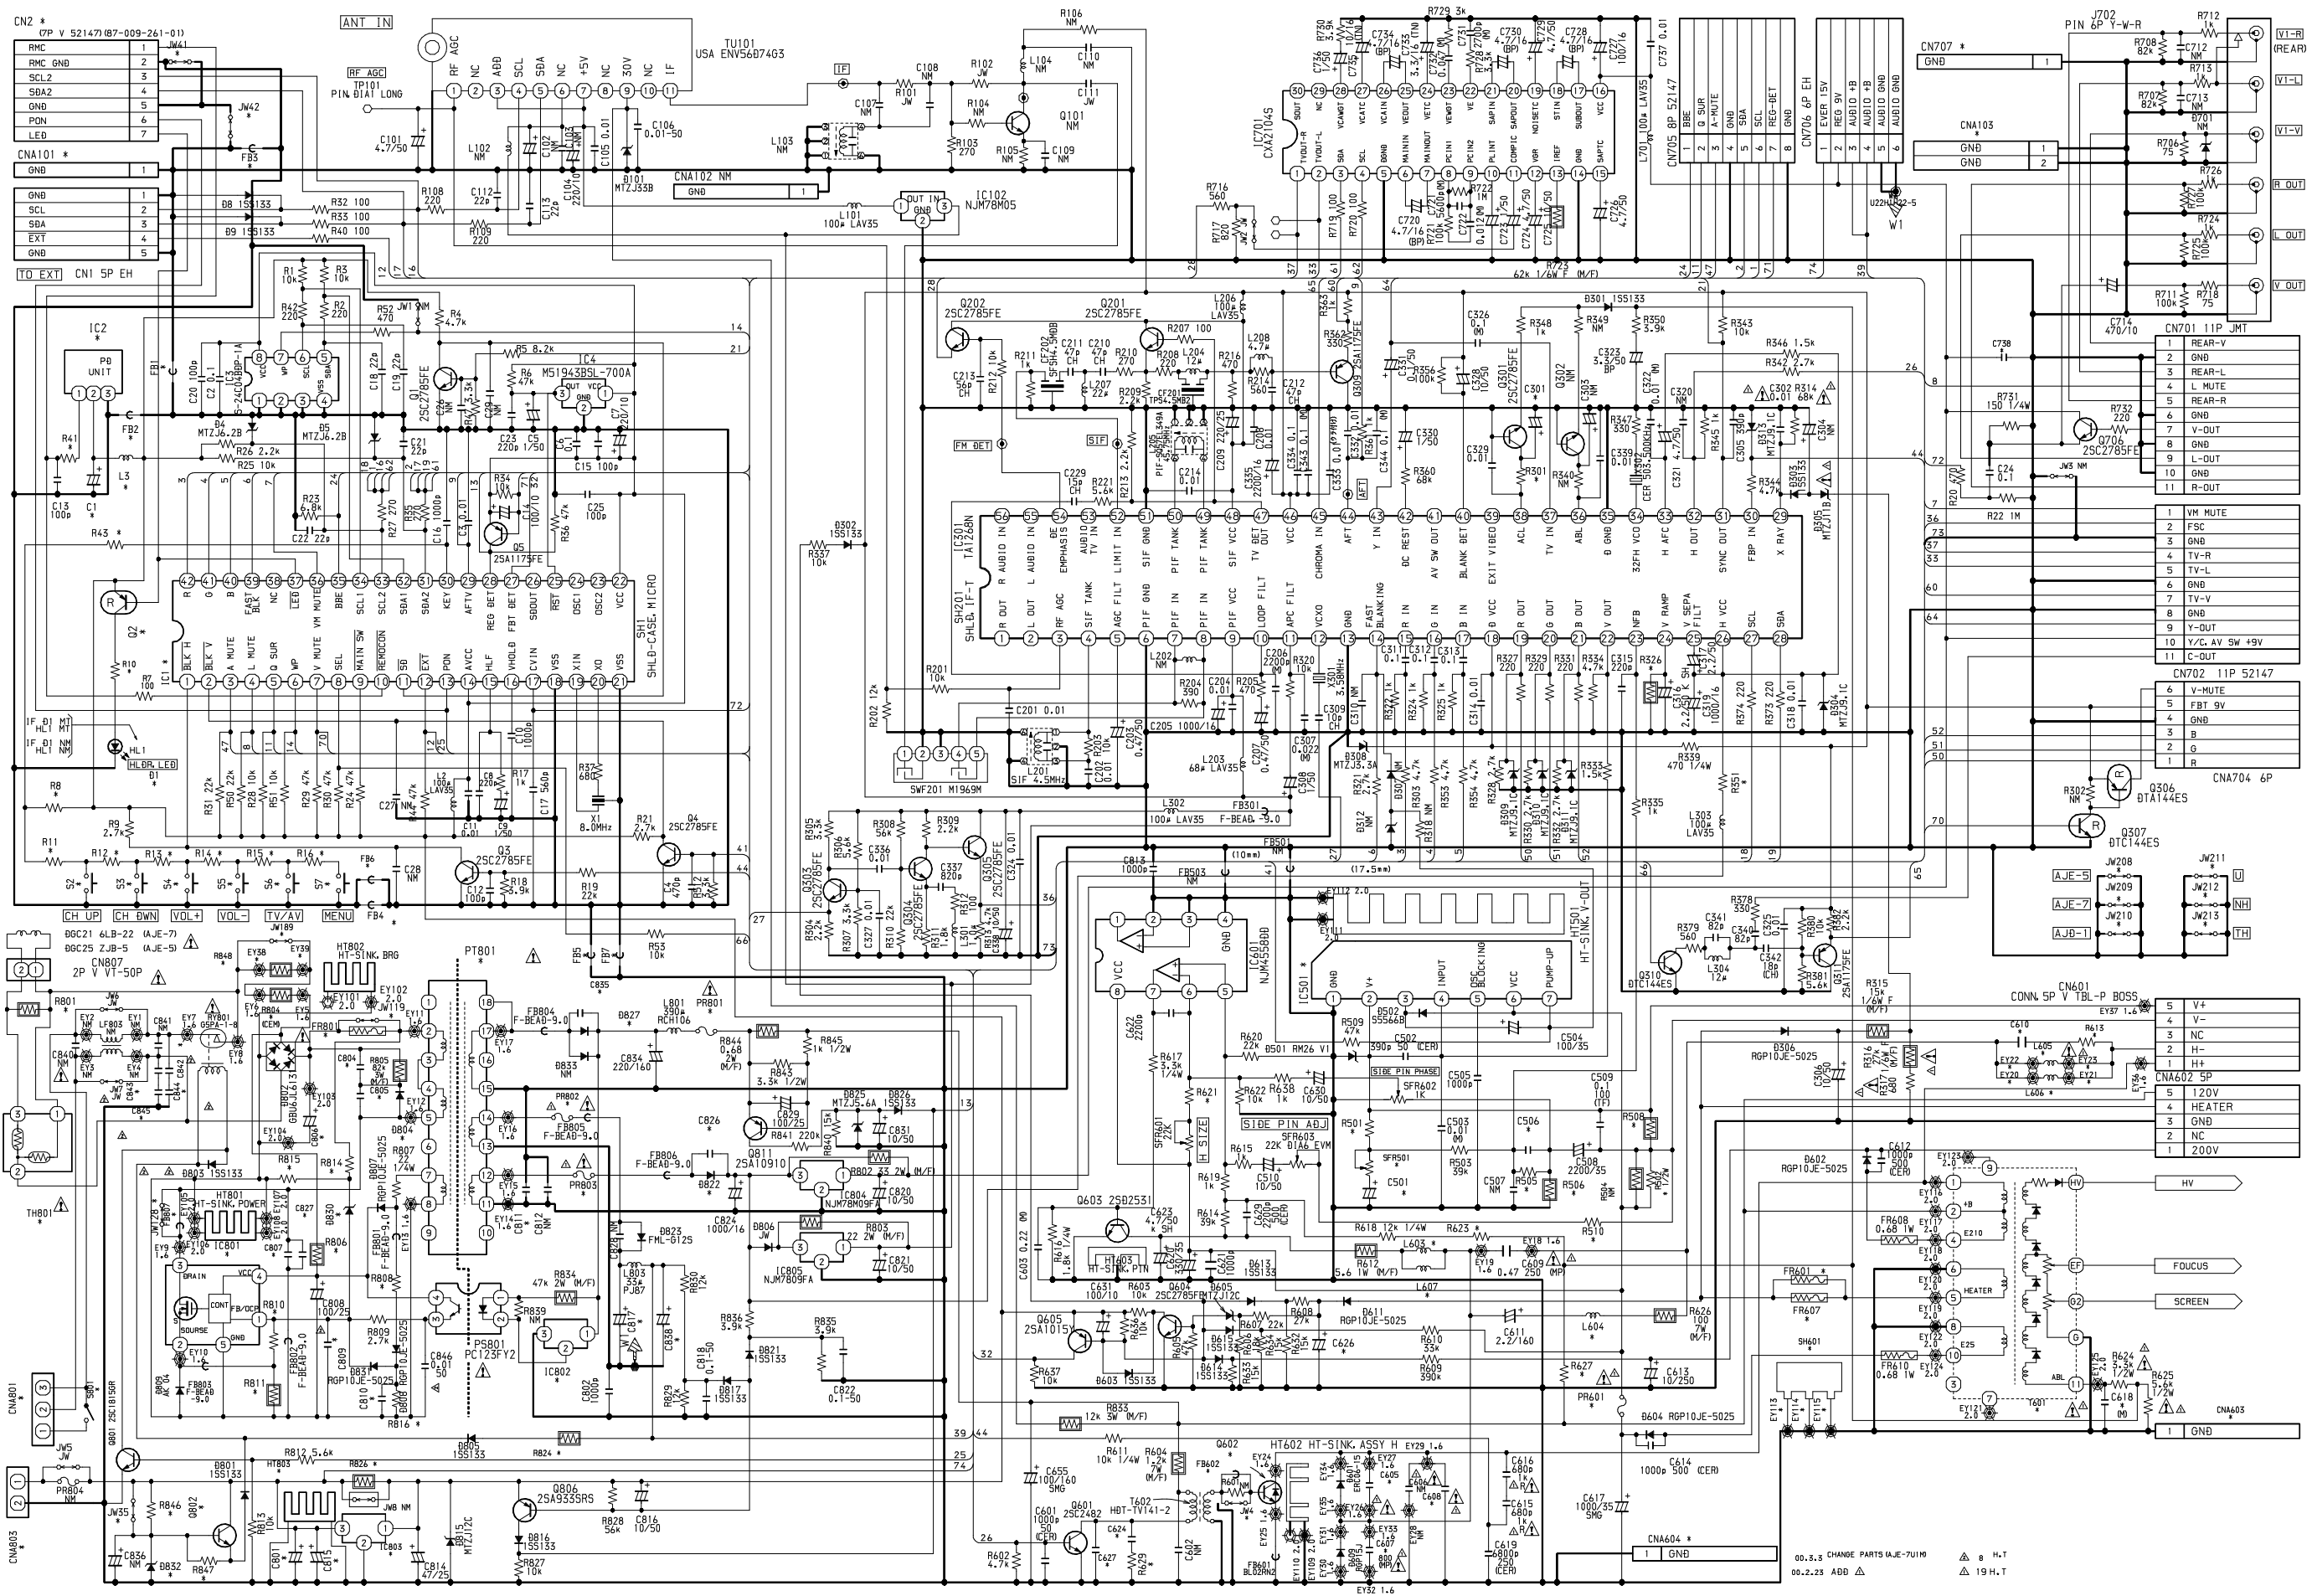


SCHEMATIC DIAGRAM - 2 (AUDIO)

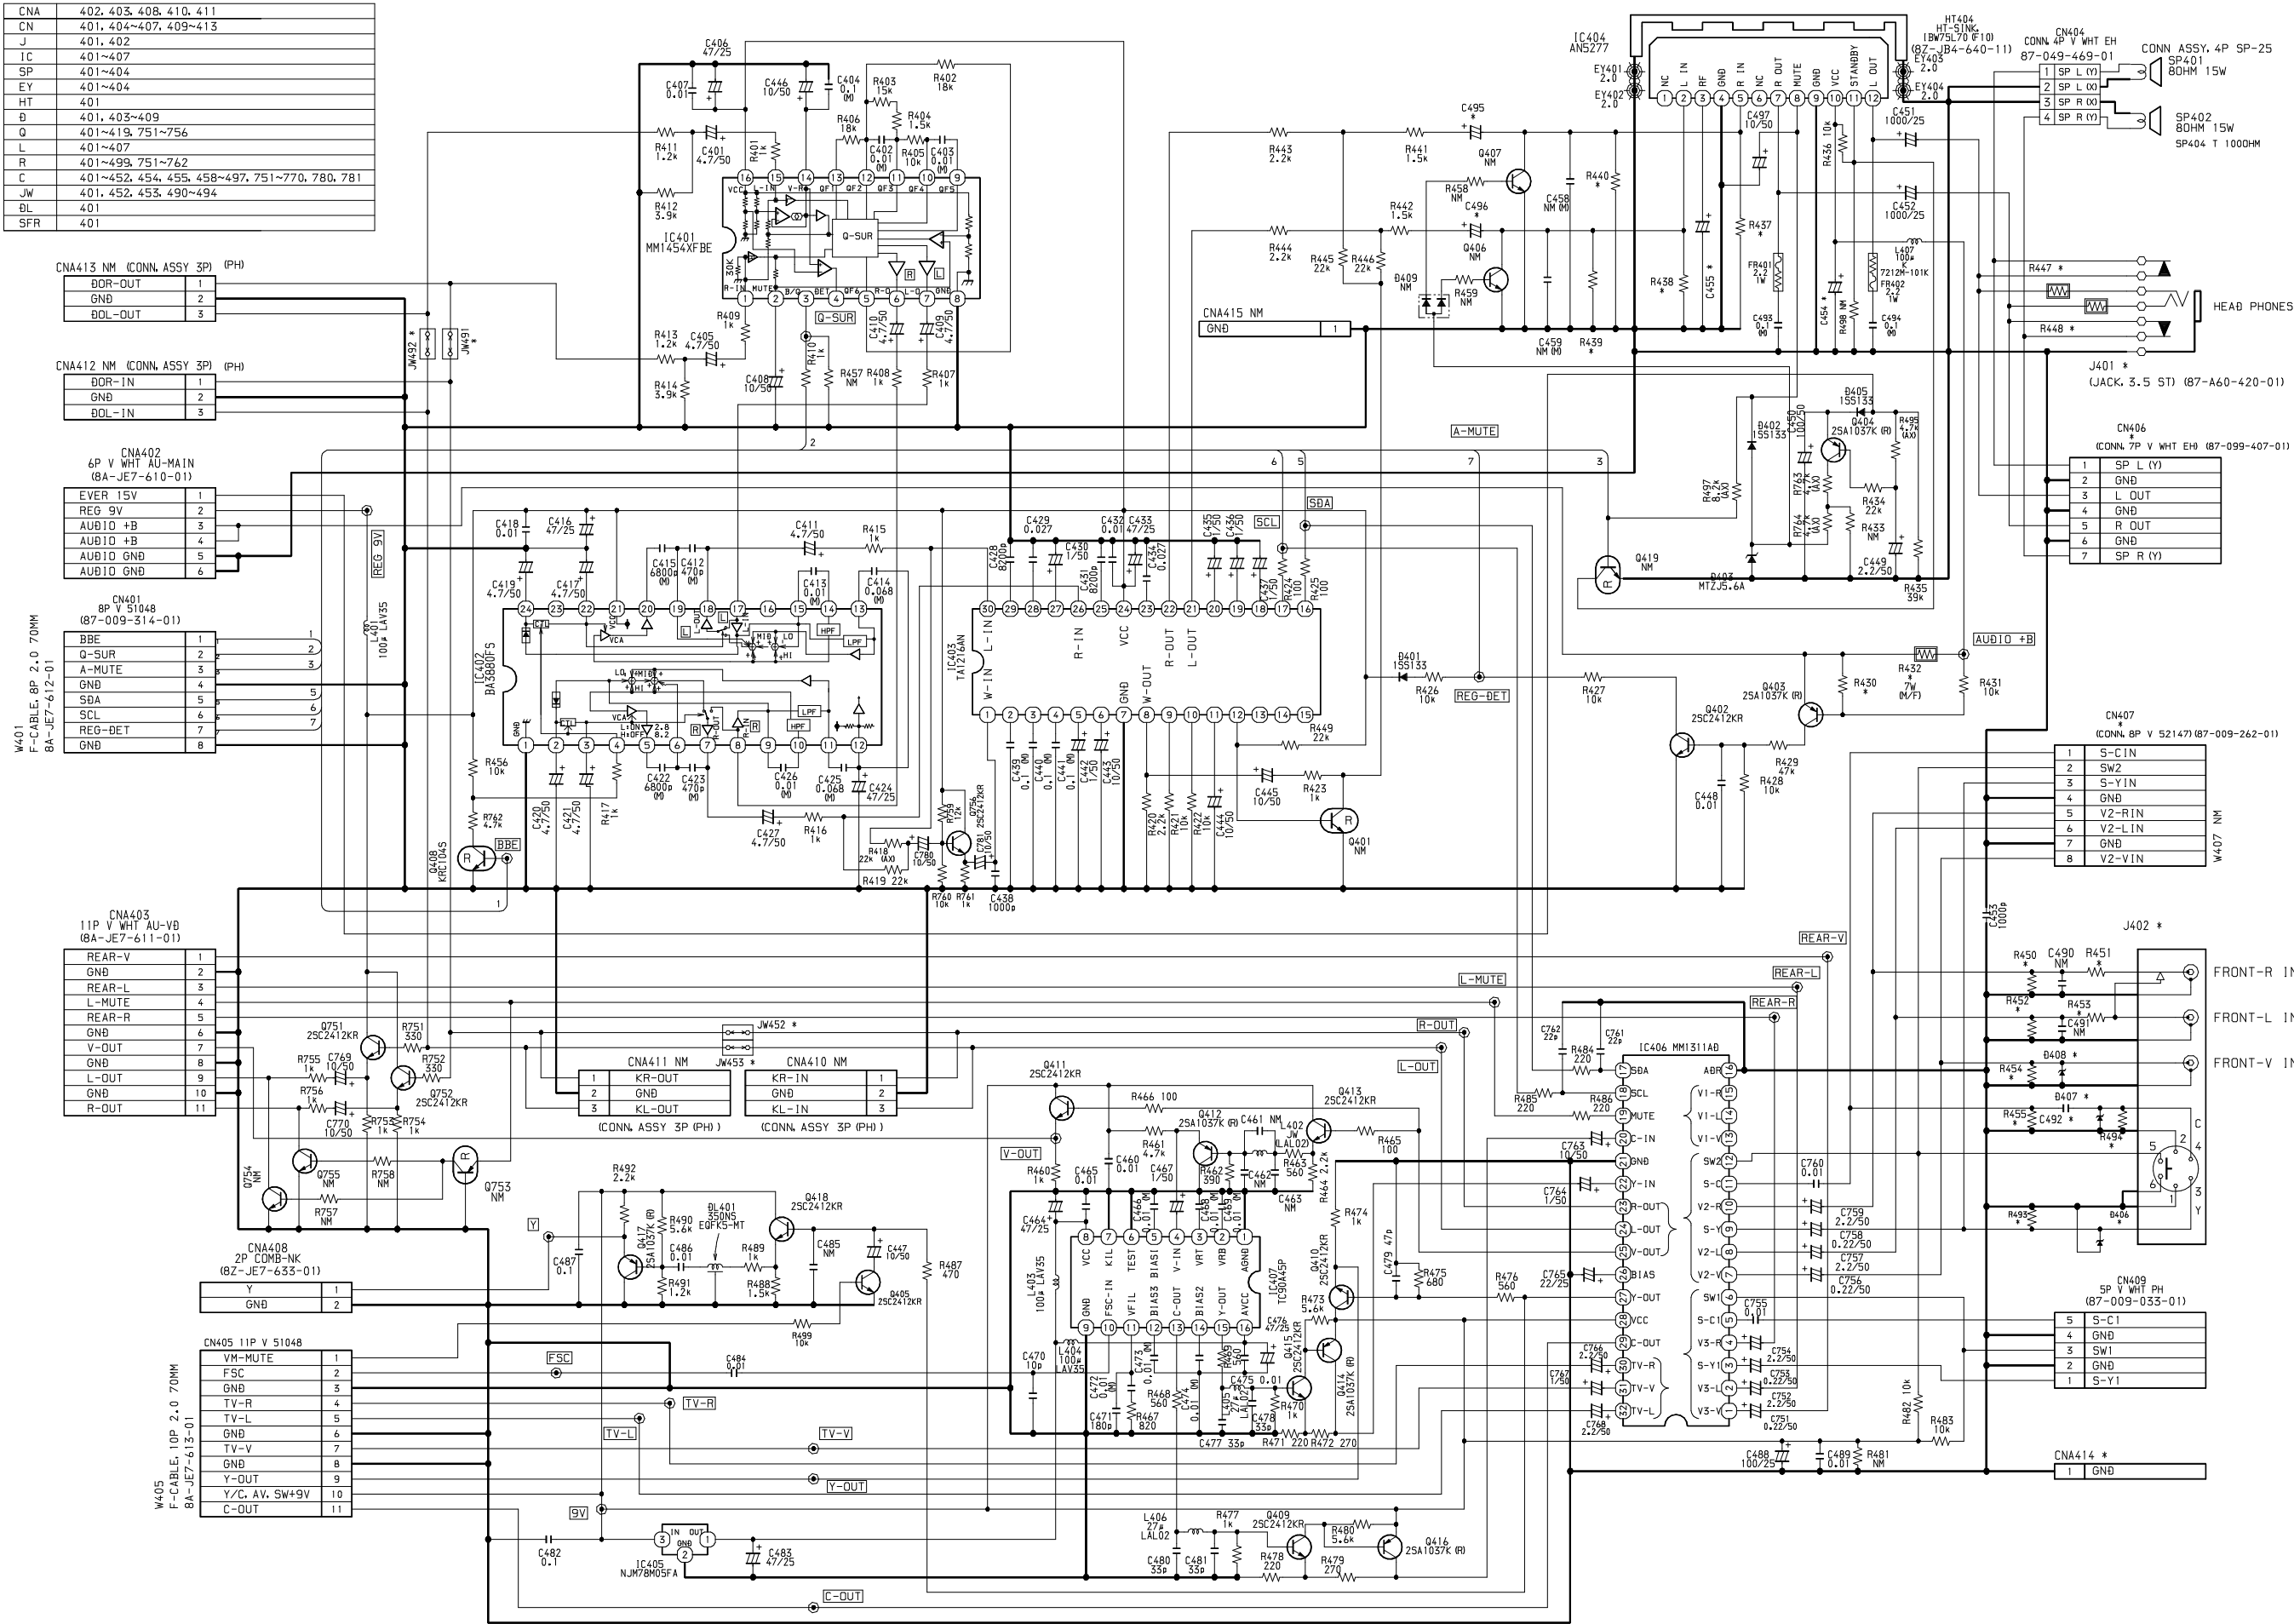


SCHEMATIC DIAGRAM - 3 (NK)

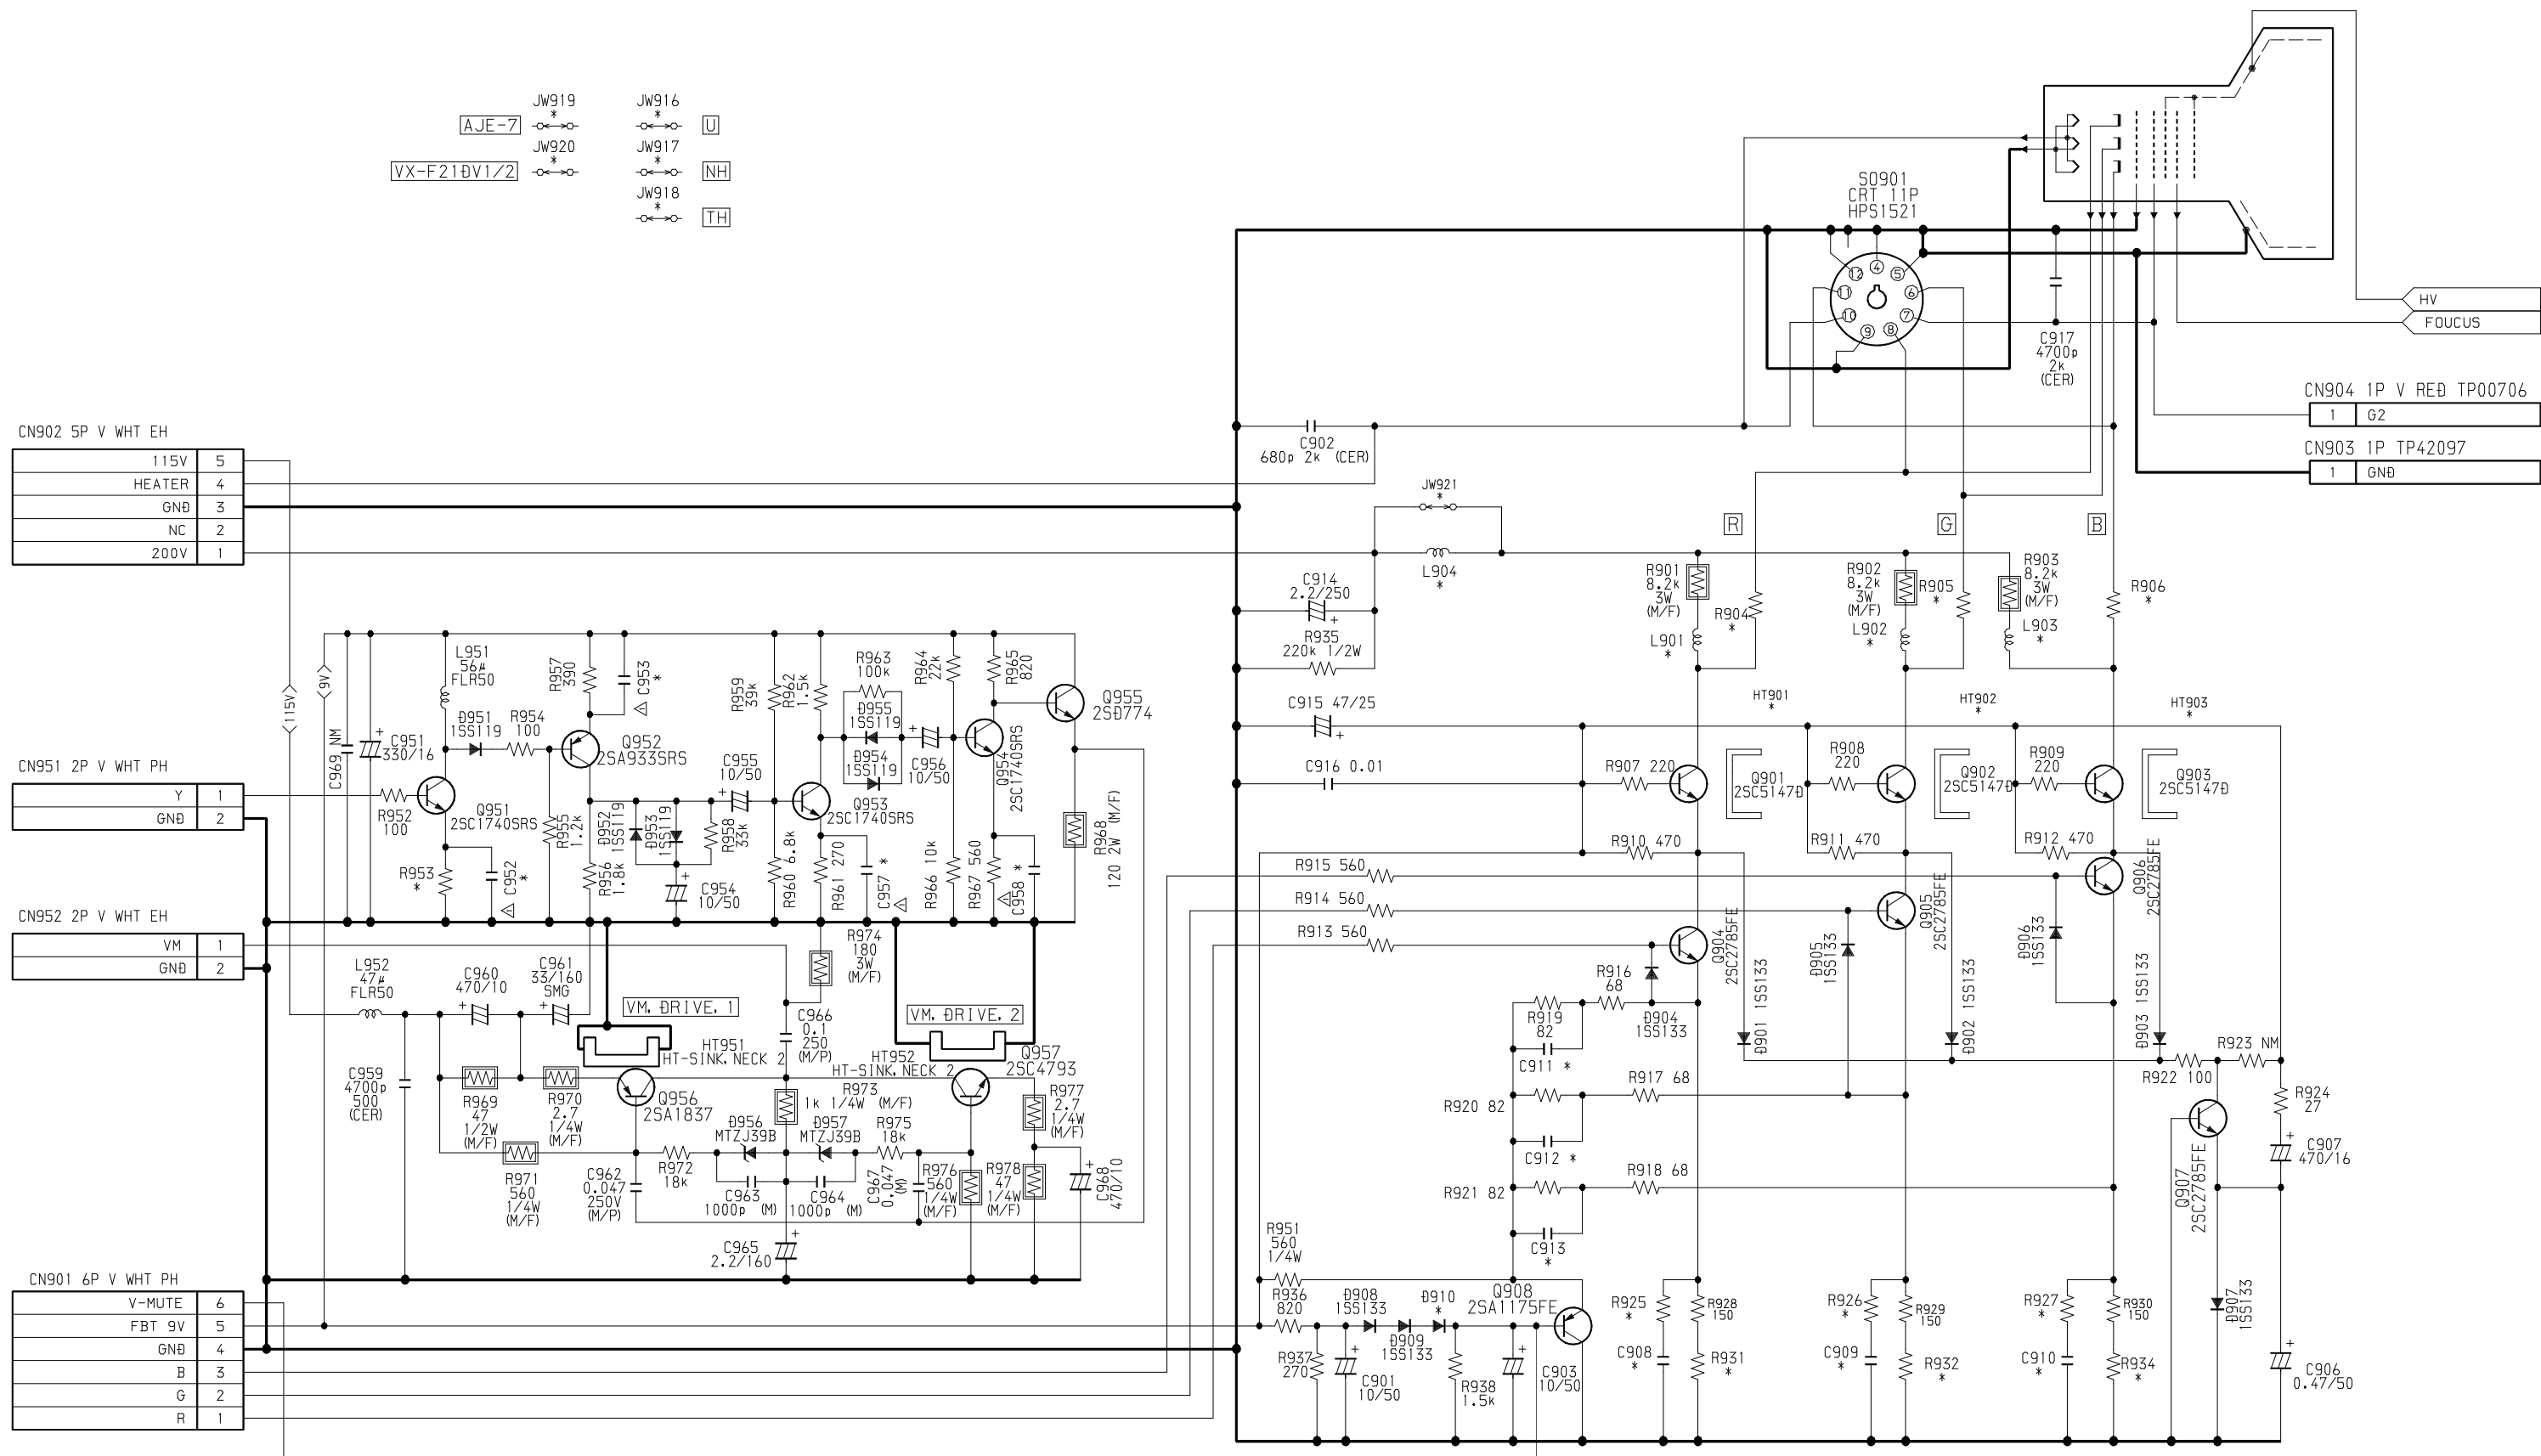

SCHEMATIC DIAGRAM - 4 (PS)

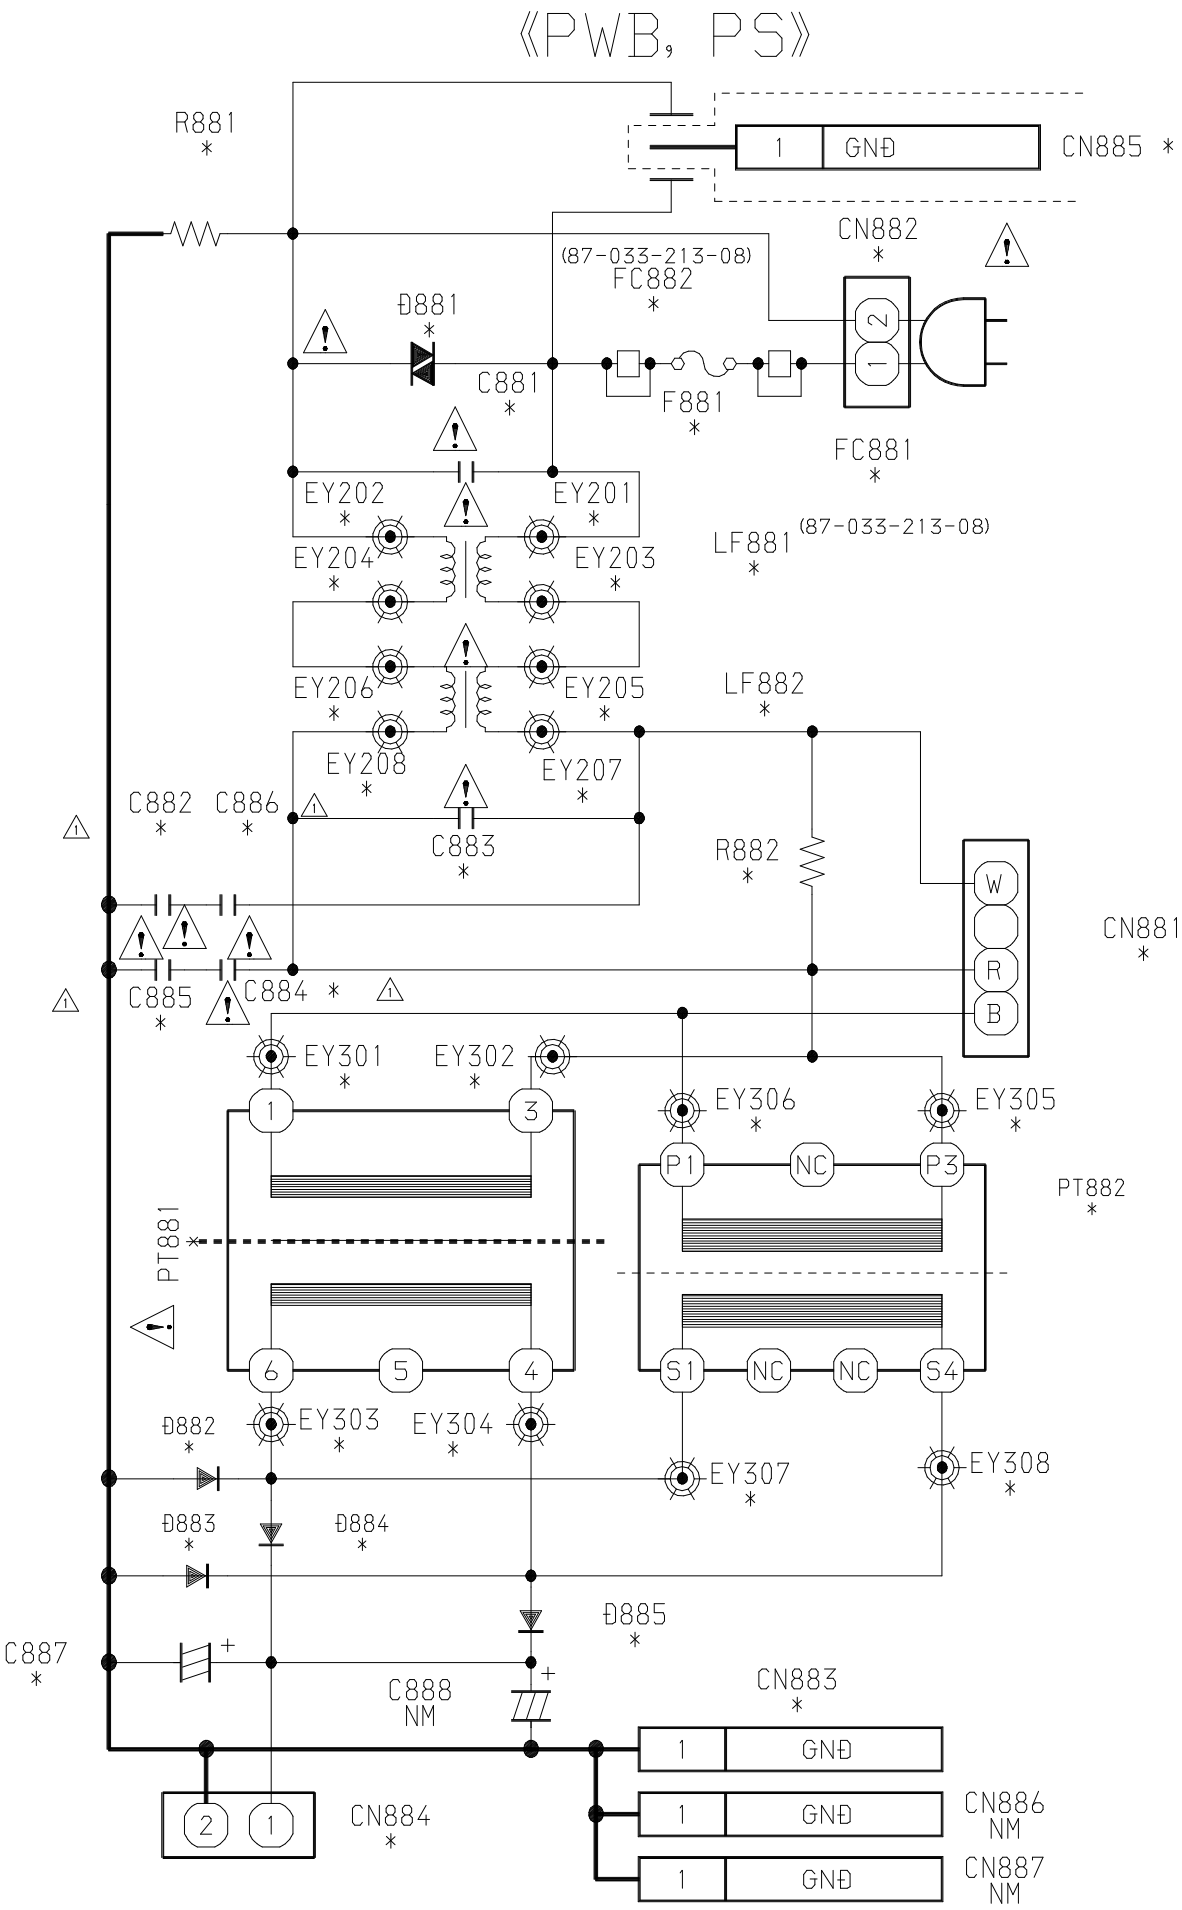

SCHEMATIC DIAGRAM - 5 (SJACK)

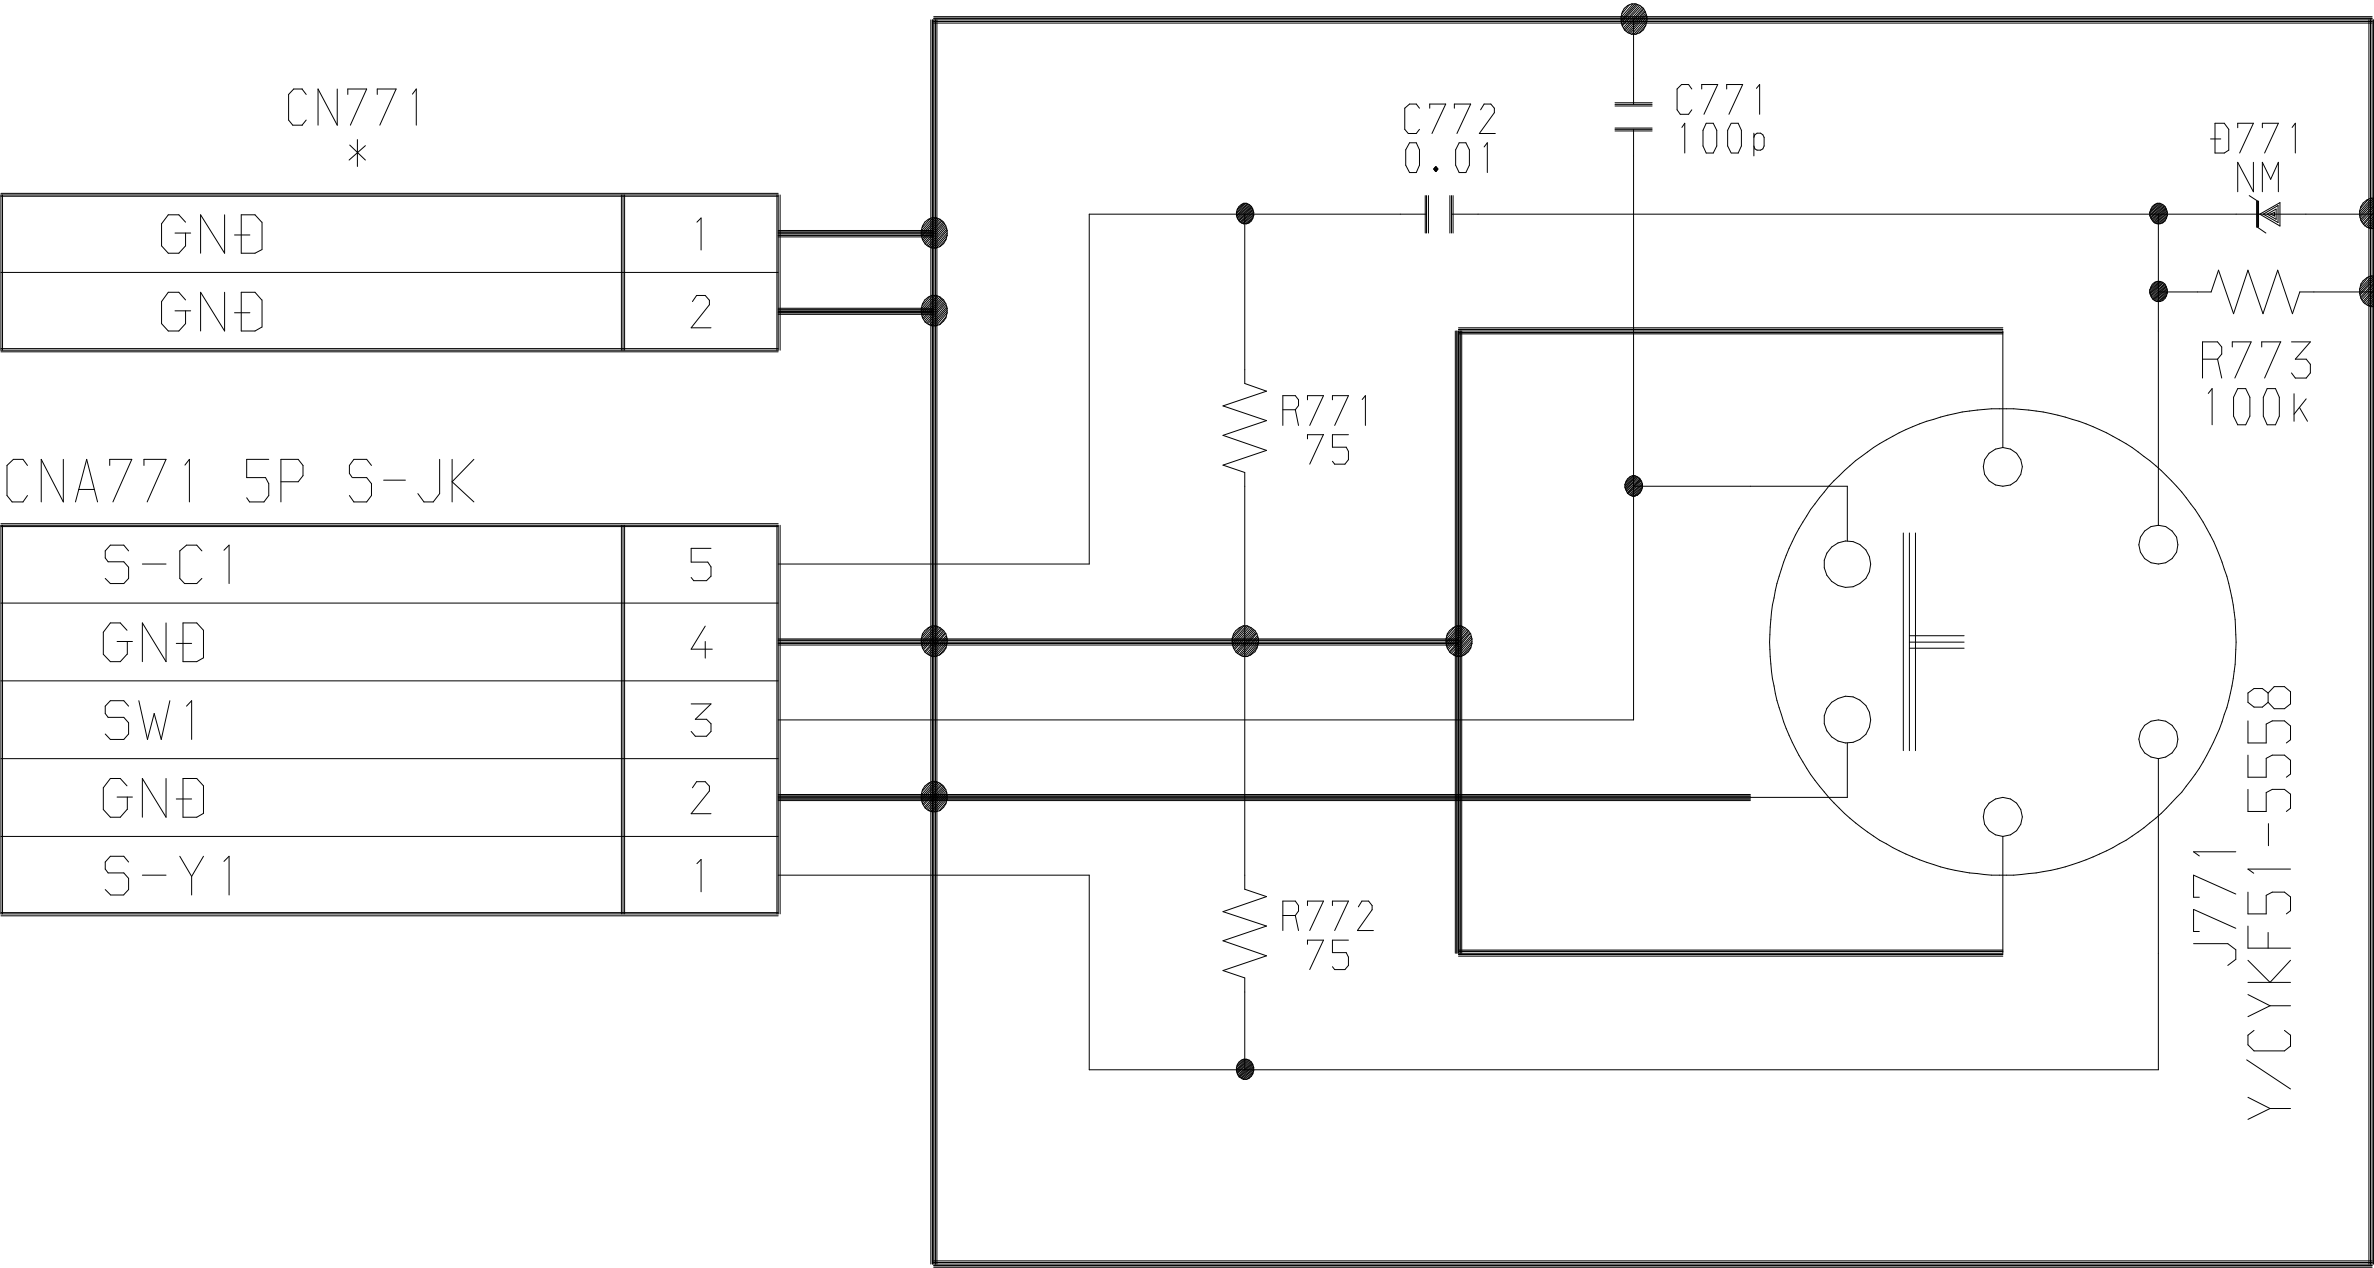

| | |
|-----|----------|
| CNA | 771 |
| J | 771 |
| Đ | 771, 772 |
| R | 771~773 |
| C | 771, 772 |

アイワ株式会社 〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 (代表)
AIWA CO.,LTD. 2-11, IKENOHATA 1-CHOME, TAITO-KU, TOKYO 110, JAPAN TEL:03 (3827) 3111