

PARTS LIST

CAUTION

- The parts identified by the Δ symbol are important for the safety . Whenever replacing these parts, be sure to use specified ones to secure the safety.
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied.
- P. W. Board Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied.

ABBREVIATIONS OF RESISTORS, CAPACITORS AND TOLERANCES

RESISTORS		CAPACITORS	
CR	Carbon Resistor	C CAP.	Ceramic Capacitor
FR	Fusible Resistor	E CAP.	Electrolytic Capacitor
PR	Plate Resistor	M CAP.	Mylar Capacitor
VR	Variable Resistor	CH CAP.	Chip Capacitor
HV R	High Voltage Resistor	HV CAP.	High Voltage Capacitor
MF R	Metal Film Resistor	MF CAP.	Metalized Film Capacitor
MG R	Metal Glazed Resistor	MM CAP.	Metalized Mylar Capacitor
MP R	Metal Plate Resistor	MP CAP.	Metalized Polystyrol Capacitor
OM R	Metal Oxide Film Resistor	PP CAP.	Polypropylene Capacitor
CMF R	Coating Metal Film Resistor	PS CAP.	Polystyrol Capacitor
UNF R	Non-Flammable Resistor	TF CAP.	Thin Film Capacitor
CH V R	Chip Variable Resistor	MPP CAP.	Metalized Polypropylene Capacitor
CH MG R	Chip Metal Glazed Resistor	TAN. CAP.	Tantalum Capacitor
COMP. R	Composition Resistor	CH C CAP.	Chip Ceramic Capacitor
LPTC R	Linear Positive Temperature Coefficient Resistor	BP E CAP.	Bi-Polar Electrolytic Capacitor
		CH AL E CAP.	Chip Aluminum Electrolytic Capacitor
		CH AL BP CAP.	Chip Aluminum Bi-Polar Capacitor
		CH TAN. E CAP.	Chip Tantalum Electrolytic Capacitor
		CH AL BP E CAP.	Chip Tantalum Bi-Polar Electrolytic Capacitor

RESISTORS									
F	G	J	K	M	N	R	H	Z	P
±1%	±2%	±5%	±10%	±20%	±30%	+30% -10%	+50% -10%	+80% -20%	+100% -0%

CONTENTS

EXPLODED VIEW PARTS LIST-1 3-2

EXPLODED VIEW -1 3-3

EXPLODED VIEW PARTS LIST-2 3-4

EXPLODED VIEW-2 3-4

PRINTED WIRING BOARD PARTS LIST 3-5

 MAIN PW BOARD ASS'Y(SFV-1088A-M2)] 3-5

REMOTE CONTROL UNIT PARTS LIST (RM-C205-1C) 3-8


PACKING 3-9

PACKING PARTS LIST 3-9

EXPLODED VIEW PARTS LIST-1

△	Ref.No.	Part No.	Part Name	Description	Local
△	V01	A51KRE89X(DT)	PICTURE TUBE		
△	DY01	QQD0011-001	DEF YOKE		
△	L01	QQW0002-001	DEG COIL		
△	T1521	CE41106-00CJ1	DRIVE TRANSF		
	5	CHGB0016-0H	BRAIDED ASSY		
△	6	QAS0054-001	SPEAKER	SP01,02(x2)	
△	7	CM48144-001-A	PB STOPPER		
△	8	GQ10013-002B-A	REAR COVER		
△	9	LC20106-001D-A	POWER CORD CLAM		
△	10	QMPD200-200-JC	POWER CORD(US/CA)	2m BLACK	
	11	QYSBSFG4016Z	TAP SCREW	4mm x 16mm(x9)	
	12	QYSBSB3010Z	TAP SCREW	3.0mm x 10mm(x2)	
△	13	GQ20001-001A-A	RATING LABEL		
△	14	GQ30034-001A-A	WARNING LABEL		
	15	A75034-B	PC MAGNET		
	16	QYSBSB4012Z	TAP SCREW	4mm x 12mm(x8)	


EXPLODED VIEW -1

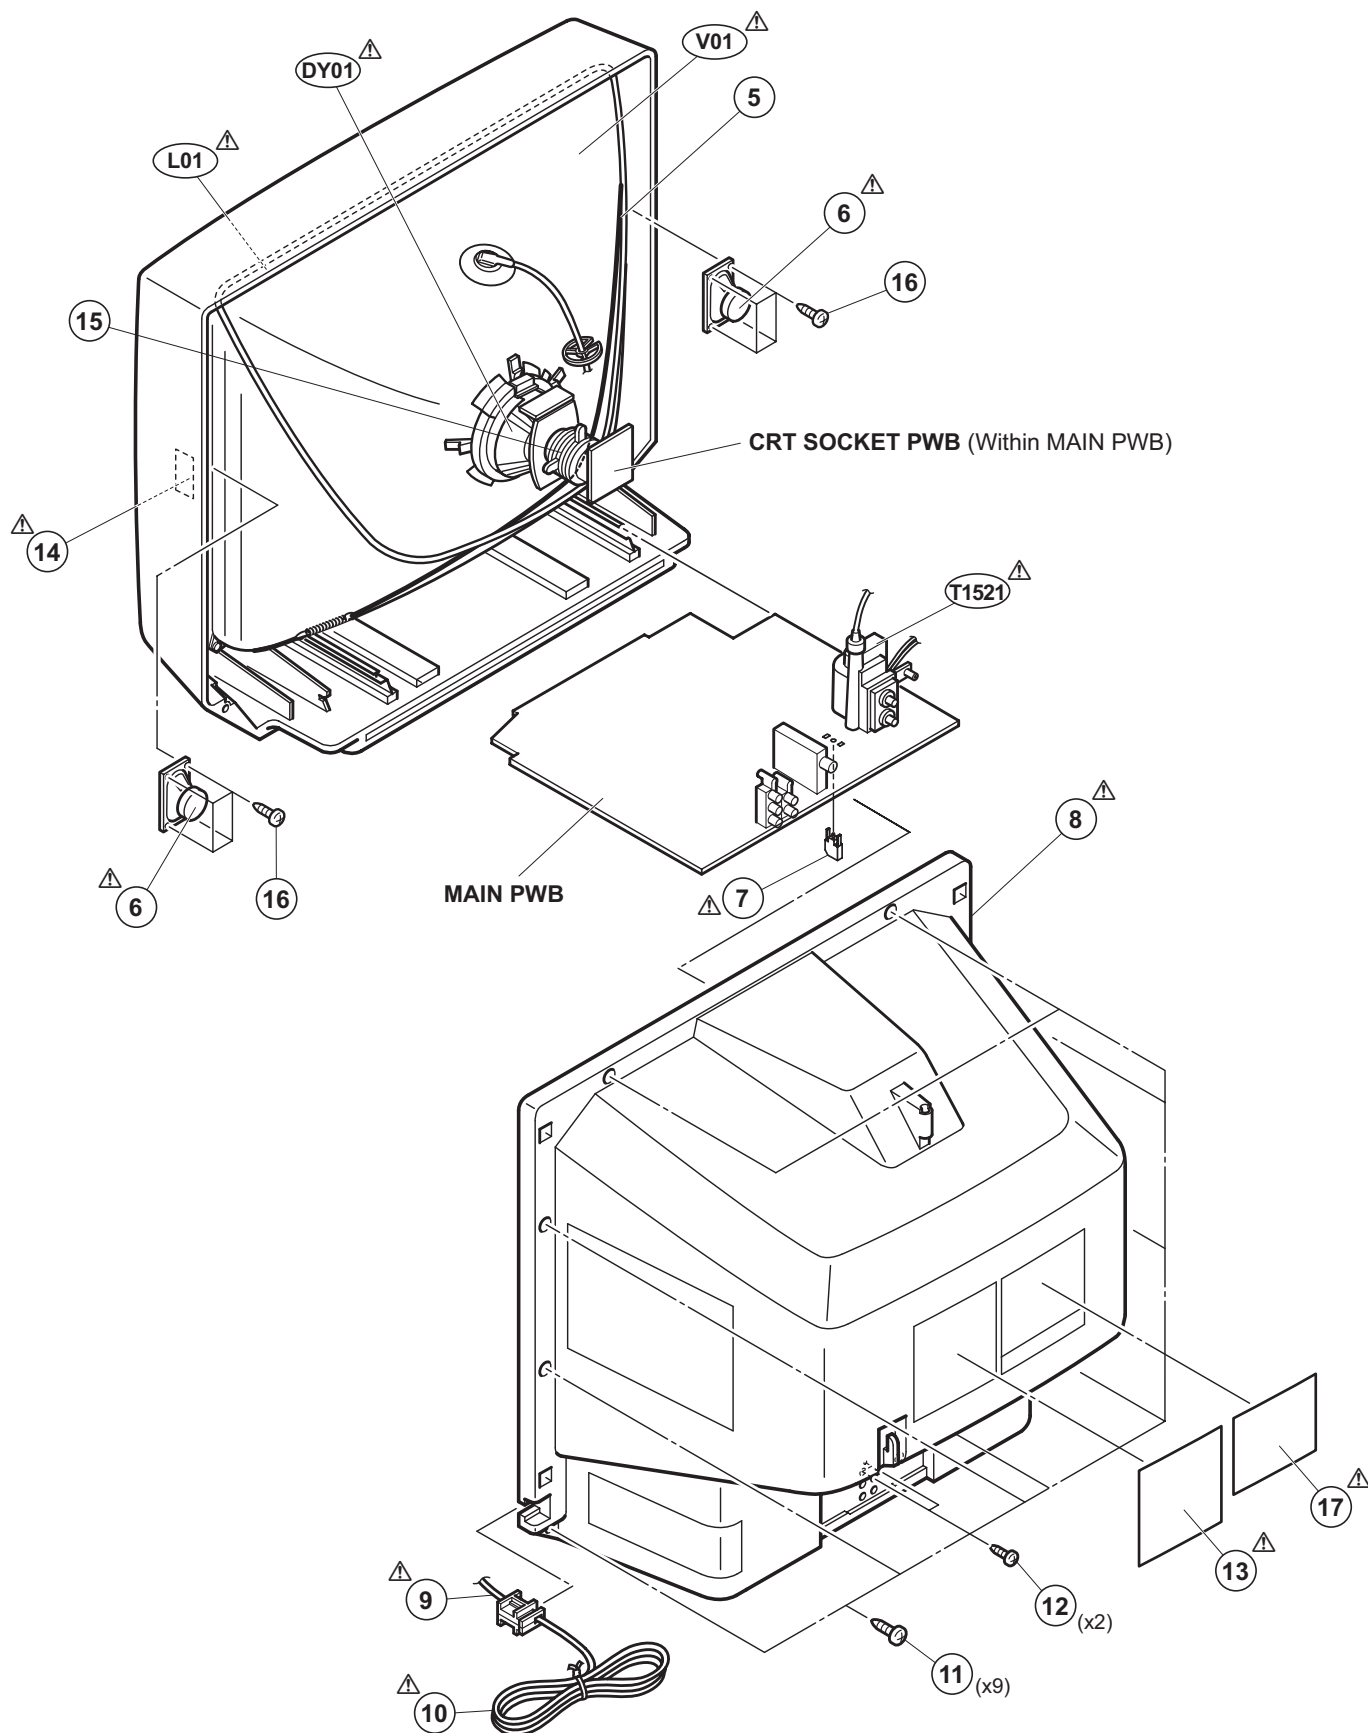

EXPLODED VIEW PARTS LIST-2

⚠	Ref.No.	Part No.	Part Name	Description	Local
⚠	1	GQ30025-002A-A	CONTROL KNOB		
⚠	2	LC30191-004A-A	REMOCON LENS		
⚠	3	GQ30026-002A-A	POWER KNOB		
⚠	4	CM43094-009-H	JVC MARK		
⚠	100	GQ10020-002C-A	F CABINET ASSY		
⚠	101	GQ30024-002A-A	DOOR		

EXPLODED VIEW-2

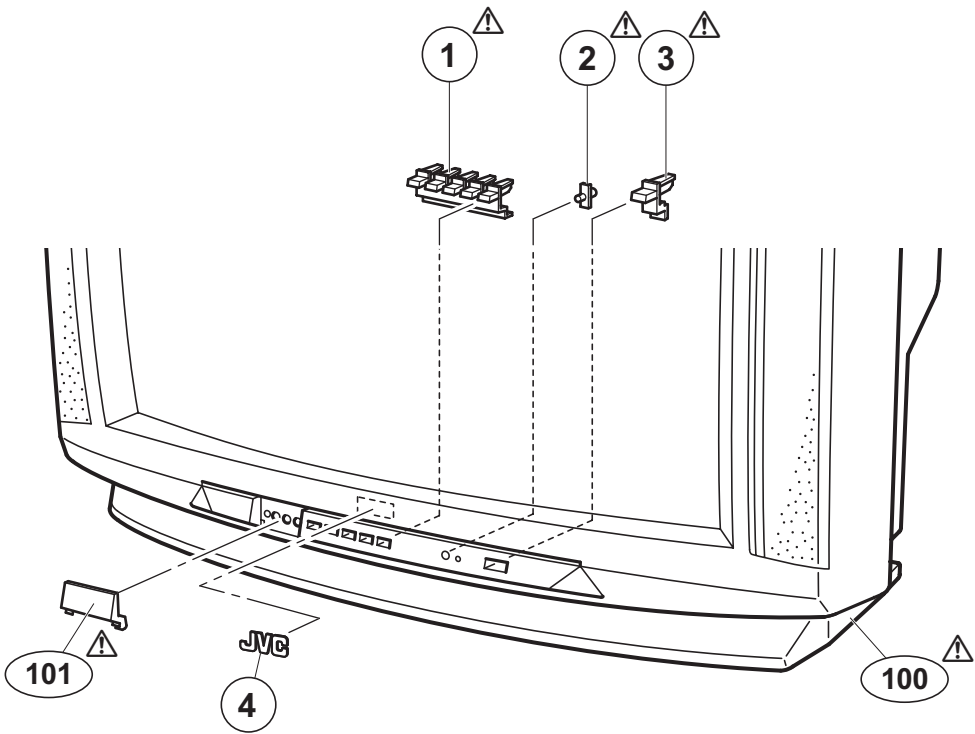

PRINTED WIRING BOARD PARTS LIST

MAIN PW BOARD ASS'Y(SFV-1088A-M2))

△Ref No.	Part No.	Part Name	DescriptionLocal
IC1001	AN7805F	IC	
IC1201	TA1242N	IC	
IC1251	BA7612N	IC	
△IC1421	LA7830	IC	
IC1541	AN7809F	IC	
△IC1602	LA4446	IC	
IC1651	UPC1851BCU	IC	
IC1701	M32722MAH-501SP	IC(MCU)	
IC1702	AT24WC04-20420	IC	(SERVICE)
IC1703	L78LR05E-MA	IC	
IC1751	GP1UM281QK	IR DETECT UNIT	38kHz
△IC1921	STR30134	IC(HYBRID)	
IC1951	TA78L009AP-T	IC	
Q1101	2SC5083/L-P/-T	TRANSISTOR	
Q1131	2SD601A/QR/-X	TRANSISTOR	
Q1132	2SD601A/QR/-X	TRANSISTOR	
Q1161	2SD601A/QR/-X	TRANSISTOR	
Q1202	2SD601A/QR/-X	TRANSISTOR	
Q1203	2SD601A/QR/-X	TRANSISTOR	
Q1261	2SB709A/QR/-X	TRANSISTOR	
Q1271	2SD601A/QR/-X	TRANSISTOR	
Q1361	2SD601A/QR/-X	TRANSISTOR	
Q1371	2SC4544-LB	POW TRANSISTOR	
Q1372	2SC4544-LB	POW TRANSISTOR	
Q1373	2SC4544-LB	POW TRANSISTOR	
△Q1521	2SC2655/Y/-T	TRANSISTOR	H OUT
△Q1522	2SD1878-YD	POW TRANSISTOR	
△Q1561	2SC2785/JH/-T	SI TRANSISTOR	
Q1562	2SA1309A/QR/-T	TRANSISTOR	
Q1602	DTC323TK-X	DIGI TRANSISTOR	
Q1701	2SD601A/QR/-X	TRANSISTOR	
Q1702	2SD601A/QR/-X	TRANSISTOR	
Q1703	2SD601A/QR/-X	TRANSISTOR	
Q1704	DTC323TK-X	DIGI TRANSISTOR	
Q1951	2SD601A/QR/-X	TRANSISTOR	
Q1952	2SA966/OY/-T	TRANSISTOR	
Q1953	2SD601A/QR/-X	TRANSISTOR	
D1001	MTZJ33B-T2	Z DIODE	
D1003	MTZJ9.1C-T2	Z DIODE	
D1004	MTZJ9.1C-T2	Z DIODE	
D1201	1SS133-T2	DIODE	
D1202	1SS133-T2	DIODE	
D1203	1SS133-T2	DIODE	
D1251	MTZJ9.1C-T2	Z DIODE	
D1252	MTZJ9.1C-T2	Z DIODE	
D1254	MTZJ9.1C-T2	Z DIODE	
D1421	1N4003-T2	SI DIODE	
D1422	MTZJ75-T2	Z DIODE	
D1423	1SS133-T2	DIODE	
D1501	MTZJ9.1C-T2	Z DIODE	
D1511	MTZJ3.3A-T2	Z DIODE	
△D1541	RGP10J-5025-T3	SI DIODE	
D1542	1SR35-400A-T2	SI DIODE	
△D1543	RGP10J-5025-T3	SI DIODE	
△D1544	RGP10J-5025-T3	SI DIODE	
D1561	1SS81-T2	SI DIODE	
△D1562	MA4068N/Z1/-T2	Z DIODE	
D1563	1SS133-T2	DIODE	
D1581	RH1S-T3	SI DIODE	
△D1582	RGP10J-5025-T3	SI DIODE	
D1583	MTZJ9.1C-T2	Z DIODE	
D1601	1SS133-T2	DIODE	
D1602	1SS133-T2	DIODE	
D1651	MTZJ9.1C-T2	Z DIODE	
D1652	MTZJ9.1C-T2	Z DIODE	
D1653	MTZJ9.1C-T2	Z DIODE	
D1655	MTZJ9.1C-T2	Z DIODE	
D1656	MTZJ9.1C-T2	Z DIODE	
D1657	MTZJ9.1C-T2	Z DIODE	
D1659	MTZJ9.1C-T2	Z DIODE	
D1660	MTZJ9.1C-T2	Z DIODE	
D1703	MTZJ5.6A-T2	Z DIODE	
D1704	1SS133-T2	DIODE	
D1717	MTZJ9.1C-T2	Z DIODE	
D1718	MTZJ9.1C-T2	Z DIODE	
D1751	LG22440	LED	POWER/ON TIMER
D1804	MTZJ5.1B-T2	Z DIODE	
D1805	1SS133-T2	DIODE	
△D1911	D3SB60	BRIDGE DIODE	
D1941	1SR35-400A-T2	SI DIODE	


△Ref No.	Part No.	Part Name	DescriptionLocal
D1942	1SR35-400A-T2	SI DIODE	
D1943	1SR35-400A-T2	SI DIODE	
D1944	1SR35-400A-T2	SI DIODE	
D1951	MTZJ12C-T2	Z DIODE	
D1953	1SR35-400A-T2	SI DIODE	
D1957	1SS133-T2	DIODE	
D1958	1SS133-T2	DIODE	
C1001	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1003	QETN1AM-227Z	E CAPACITOR	220uF 10V M
C1004	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1005	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1006	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C1012	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1013	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C1101	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1102	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1103	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1104	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1105	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C1106	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1108	NDC31HJ-680X	C CAPACITOR	68pF 50V J
C1131	QFV71HJ-154Z	MF CAPACITOR	0.15uF 50V J
C1132	NCB31HK-152X	C CAPACITOR	1500pF 50V K
C1133	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C1134	NCB31HK-472X	C CAPACITOR	4700pF 50V K
C1135	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1138	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C1161	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C1162	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1163	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C1164	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C1166	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1167	NDC31HJ-470X	C CAPACITOR	47pF 50V J
C1169	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1170	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1207	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C1208	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1209	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C1210	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C1212	NCB31HK-104X	C CAPACITOR	0.1uF 50V K
C1214	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1215	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C1217	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C1252	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1254	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1255	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1274	QETN1HM-105Z	E CAPACITOR	1uF 50V M
C1303	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1304	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C1305	NDC31HJ-100X	C CAPACITOR	10pF 50V J
C1306	NCB31HK-223X	C CAPACITOR	0.022uF 50V K
C1307	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M
C1309	NDC31HJ-2R0X	C CAPACITOR	2pF 50V J
C1352	NDC31HJ-680X	C CAPACITOR	68pF 50V J
C1355	NDC31HJ-150X	C CAPACITOR	15pF 50V J
C1356	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1374	NDC31HJ-271X	C CAPACITOR	270pF 50V J
C1375	NDC31HJ-271X	C CAPACITOR	270pF 50V J
C1376	NDC31HJ-331X	C CAPACITOR	330pF 50V J
C1377	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C1391	QETM2EM-336	E CAPACITOR	33uF 250V M
△C1392	QCZ0121-102	C CAPACITOR	1000pF
C1401	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M
C1402	QBHC1CK-225Z	TA E CAPACITOR	2.2uF 16V K
C1403	NCB31HK-102X	C CAPACITOR	1000pF 50V K
C1421	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1422	QCS32HJ-560Z	C CAPACITOR	56pF 500V J
C1423	QCS32HJ-180Z	C CAPACITOR	18pF 500V J
C1424	QETN1VM-107Z	E CAPACITOR	100uF 35V M
C1425	QETN1VM-477Z	E CAPACITOR	470uF 35V M
C1426	QFLC2AK-104Z	M CAPACITOR	0.1uF 100V K
C1427	QETM1EM-228	E CAPACITOR	2200uF 25V M
C1428	QFV21HJ-474Z	MF CAPACITOR	0.47uF 50V J
C1429	QFV21HJ-224Z	MF CAPACITOR	0.22uF 50V J
C1501	QETN1CM-107Z	E CAPACITOR	100uF 16V M
C1502	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1503	NCB31HK-103X	C CAPACITOR	0.01uF 50V K
C1505	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1511	QETN1EM-476Z	E CAPACITOR	47uF 25V M
C1521	NCB31HK-332X	C CAPACITOR	3300pF 50V K
C1522	NCB31HK-822X	C CAPACITOR	8200pF 50V K
C1523	QEM61HK-105Z	E CAPACITOR	1uF 50V K
△C1524	QFZ0198-792	MPP CAPACITOR	7900pF

△Ref No.	Part No.	Part Name	DescriptionLocal	△Ref No.	Part No.	Part Name	DescriptionLocal
△C1525	QEZ0203-107	E CAPACITOR	100uF 160V M	△C1911	QCZ9074-472	C CAPACITOR	4700pF
△C1526	QFZ0210-534	MPP CAPACITOR	0.53uF	△C1912	QCZ9074-472	C CAPACITOR	4700pF
C1543	QETN1VM-477Z	E CAPACITOR	470uF 35V M	△C1913	QCZ9074-472	C CAPACITOR	4700pF
C1545	QETN1CM-227Z	E CAPACITOR	220uF 16V M	△C1914	QEZO169-337	E CAPACITOR	330uF
C1546	QETN1CM-477Z	E CAPACITOR	470uF 16V M	C1921	QEH2CM-335Z	E CAPACITOR	3.3uF 160V M
C1548	QETN1CM-227Z	E CAPACITOR	220uF 16V M	C1922	QEHQ2CM-336	E CAPACITOR	33uF 160V M
C1561	QETN1HM-106Z	E CAPACITOR	10uF 50V M	C1951	QETN1EM-227Z	E CAPACITOR	220uF 25V M
C1562	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	C1953	QETN1EM-107Z	E CAPACITOR	100uF 25V M
C1563	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	C1954	NCB31HK-473X	C CAPACITOR	0.047uF 50V K
C1581	QETN2EM-106Z	E CAPACITOR	10uF 250V M	C1956	QETN1HM-106Z	E CAPACITOR	10uF 50V M
C1582	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	C1958	QETN1EM-107Z	E CAPACITOR	100uF 25V M
C1583	QETN1HM-106Z	E CAPACITOR	10uF 50V M	C1959	QETN1HM-226Z	E CAPACITOR	22uF 50V M
C1584	QFLC2AJ-104Z	M CAPACITOR	0.1uF 100V J	△C1981	QCZ9073-332	C CAPACITOR	3300pF
C1614	QETN1EM-108Z	E CAPACITOR	1000uF 25V M	R1003	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C1616	QENC1HM-474Z	BP E CAPACITOR	0.47uF 50V M	R1004	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C1617	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R1101	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J
C1618	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R1102	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C1619	QETN1CM-477Z	E CAPACITOR	470uF 16V M	R1103	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C1620	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R1104	QRE121J-101Y	C RESISTOR	100Ω 1/2W J
C1622	QENC1HM-474Z	BP E CAPACITOR	0.47uF 50V M	R1105	NRSA63J-180X	MG RESISTOR	18Ω 1/16W J
C1623	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R1106	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J
C1624	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R1131	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J
C1625	QETN1CM-477Z	E CAPACITOR	470uF 16V M	R1133	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C1626	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R1134	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C1627	QETN1CM-477Z	E CAPACITOR	470uF 16V M	R1135	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J
C1651	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R1136	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J
C1652	QETN1CM-107Z	E CAPACITOR	100uF 16V M	R1137	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C1653	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R1138	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J
C1654	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R1142	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C1655	QENC1HM-475Z	BP E CAPACITOR	4.7uF 50V M	R1145	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C1656	QENC1HM-105Z	BP E CAPACITOR	1uF 50V M	R1146	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J
C1657	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	R1161	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C1658	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	R1162	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C1659	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M	R1163	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C1660	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R1164	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
C1661	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R1204	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C1662	QBTC1CK-335Z	TA E CAPACITOR	3.3uF 16V K	R1205	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C1663	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1208	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C1664	QBTC1CK-106Z	TA E CAPACITOR	10uF 16V K	R1209	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C1665	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1210	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
C1666	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1211	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J
C1667	QETN1HM-336Z	E CAPACITOR	33uF 50V M	R1212	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
C1668	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1213	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J
C1669	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1215	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J
C1670	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1216	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
C1671	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	R1218	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
C1672	NCB31HK-222X	C CAPACITOR	2200pF 50V K	R1219	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
C1673	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R1261	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J
C1674	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	R1263	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C1675	NCB31HK-222X	C CAPACITOR	2200pF 50V K	R1265	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C1676	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R1271	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C1679	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1272	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C1685	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1278	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C1686	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1290	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
C1687	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1291	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
C1688	NCB31HK-472X	C CAPACITOR	4700pF 50V K	R1298	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
C1689	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1305	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J
C1690	QETN1HM-106Z	E CAPACITOR	10uF 50V M	R1306	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J
C1702	NCB31HK-272X	C CAPACITOR	2700pF 50V K	R1351	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C1704	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R1352	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
C1705	NDC31HJ-151X	C CAPACITOR	150pF 50V J	R1354	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C1706	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R1365	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
C1707	QETN1HM-105Z	E CAPACITOR	1uF 50V M	R1366	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J
C1708	NCS21HJ-221X	C CAPACITOR	220pF 50V J	R1367	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J
C1709	NCS21HJ-102X	C CAPACITOR	1000pF 50V J	R1371	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
C1710	NDC31HJ-681X	C CAPACITOR	680pF 50V J	R1372	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
C1711	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M	R1373	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J
C1712	NCB31HK-102X	C CAPACITOR	1000pF 50V K	R1374	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C1714	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R1375	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C1716	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R1376	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J
C1717	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R1377	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C1718	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R1378	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C1719	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R1379	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
C1720	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R1380	QRZ0111-152	C RESISTOR	1.5kΩ 1/2W K
C1721	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	R1381	QRZ0111-152	C RESISTOR	1.5kΩ 1/2W K
C1722	NDC31HJ-5R0X	C CAPACITOR	5pF 50V J	R1382	QRZ0111-152	C RESISTOR	1.5kΩ 1/2W K
C1723	NDC31HJ-5R0X	C CAPACITOR	5pF 50V J	R1383	QRL029J-123	OMF RESISTOR	12kΩ 2W J
C1724	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R1384	QRL029J-123	OMF RESISTOR	12kΩ 2W J
C1725	QETN1AM-227Z	E CAPACITOR	220uF 10V M	R1385	QRL029J-123	OMF RESISTOR	12kΩ 2W J
C1726	NDC31HJ-470X	C CAPACITOR	47pF 50V J	R1386	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C1735	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	R1387	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C1751	QETN1EM-476Z	E CAPACITOR	47uF 25V M	R1388	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J
C1801	QENC1HM-474Z	BP E CAPACITOR	0.47uF 50V M	R1421	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
C1802	QENC1HM-474Z	BP E CAPACITOR	0.47uF 50V M	R1422	QRE121J-391Y	C RESISTOR	390Ω 1/2W J
C1803	QENC1HM-474Z	BP E CAPACITOR	0.47uF 50V M	R1423	QRX01GJ-1R5	MF RESISTOR	1.5Ω 1W J
△C1901	QFZ9072-104	MM CAPACITOR	0.1uF AC250V K	R1425	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J
△C1902	QFZ9072-473	MM CAPACITOR	0.047uF AC250V K				

△Ref No.	Part No.	Part Name	DescriptionLocal	△Ref No.	Part No.	Part Name	DescriptionLocal
R1427	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	R1728	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J
R1428	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	R1729	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J
R1429	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R1730	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J
R1441	QRE121J-102Y	C RESISTOR	1kΩ 1/2W J	R1732	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1501	NRSA63J-361X	MG RESISTOR	360Ω 1/16W J	R1734	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J
R1502	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	R1735	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
R1505	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	R1736	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J
R1506	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	R1737	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R1507	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	R1738	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1511	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	R1739	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R1512	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	R1740	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1521	QRE121J-220Y	C RESISTOR	22Ω 1/2W J	R1741	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R1522	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	R1742	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J
R1523	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	R1743	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R1524	QRE121J-271Y	C RESISTOR	270Ω 1/2W J	R1744	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R1525	QRL029J-121	OMF RESISTOR	120Ω 2W J	R1745	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J
R1526	QRL039J-152	OMF RESISTOR	1.5kΩ 3W J	R1746	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J
R1541	QRT029J-1R8	MF RESISTOR	1.8Ω 2W J	R1751	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1542	QRL029J-101	OMF RESISTOR	100Ω 2W J	R1752	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
R1543	QRT039J-1R0	MF RESISTOR	1Ω 3W J	R1753	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J
R1544	QRT039J-2R2	MF RESISTOR	2.2Ω 3W J	R1754	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1546	QRL029J-220	OMF RESISTOR	22Ω 2W J	R1755	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J
△R1561	QRK126J-4R7X	UNF C RESISTOR	4.7Ω 1/2W J	R1756	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J
△R1562	NRZ0032-7151X	CMF RESISTOR	7.15kΩ	R1757	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
△R1563	NRZ0032-3241X	CMF RESISTOR	3.24kΩ	R1758	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R1564	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	R1759	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1565	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	R1760	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1566	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	R1765	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R1567	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	R1766	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
R1568	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	R1768	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J
R1571	QRX01GJ-1R2	MF RESISTOR	1.2Ω 1W J	R1769	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J
△R1581	QRJ146J-2R2X	UNF C RESISTOR	2.2Ω 1/4W J	R1804	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1582	QRL029J-223	OMF RESISTOR	22kΩ 2W J	R1805	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1583	QRE121J-333Y	C RESISTOR	33kΩ 1/2W J	R1806	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J
R1584	QRE121J-393Y	C RESISTOR	39kΩ 1/2W J	△R1901	QRF054K-1R0	UNF WW RESISTOR	1Ω 5W K
R1585	QRE121J-103Y	C RESISTOR	10kΩ 1/2W J	R1921	QRX029J-2R7	MF RESISTOR	2.7Ω 2W J
R1586	QRE121J-472Y	C RESISTOR	4.7kΩ 1/2W J	△R1923	QRJ146J-470X	UNF C RESISTOR	47Ω 1/4W J
R1615	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R1924	QRN141J-334Y	C RESISTOR	330kΩ 1/4W J
R1616	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	R1925	QRN141J-123Y	C RESISTOR	12kΩ 1/4W J
R1617	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	△R1926	QRF154J-271	UNF WW RESISTOR	270Ω 15W J
R1618	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	R1952	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R1619	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	R1953	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J
R1620	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	R1954	QRE121J-102Y	C RESISTOR	1kΩ 1/2W J
R1621	QRE121J-4R7Y	C RESISTOR	4.7Ω 1/2W J	R1955	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J
R1622	QRE121J-4R7Y	C RESISTOR	4.7Ω 1/2W J	R1956	QRE121J-101Y	C RESISTOR	100Ω 1/2W J
R1625	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	R1957	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J
R1627	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	R1958	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J
R1628	QRE121J-271Y	C RESISTOR	270Ω 1/2W J	△R1981	QRZ9041-275	C RESISTOR	2.7MΩ 1/2W K
R1629	QRE121J-271Y	C RESISTOR	270Ω 1/2W J	L1102	QQLZ014-R22	COIL	0.22uH 100mA L
R1651	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	L1104	QQL03BJ-680Z	P COIL	68uH J
R1652	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	L1131	QQL03BJ-220Z	P COIL	22uH J
R1653	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	L1161	QQL03BJ-680Z	P COIL	68uH J
R1654	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	L1162	QQL03BJ-390Z	P COIL	39uH J
R1655	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	L1351	QQL03BJ-220Z	P COIL	22uH J
R1656	NRVA02D-152X	CMF RESISTOR	1.5kΩ 1/10W D	L1391	QQL03BJ-390Z	P COIL	39uH J
△R1658	NRVA02D-153X	CMF RESISTOR	15kΩ 1/10W D	L1701	QQL03BJ-4R7Z	P COIL	4.7uH J
R1660	NRSA63J-512X	MG RESISTOR	5.1kΩ 1/16W J	L1709	QQL03BJ-100Z	P COIL	10uH J
R1669	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	T1131	QQR0907-001	IFT	
R1670	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	T1161	CELT003-109J3	SIF TRANSF	
R1671	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	△T1522	QQH0030-002	FB TRANSF	
R1672	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	△T1901	QQT0198-001	POWER TRANSF	
R1682	NRSA63J-683X	MG RESISTOR	68kΩ 1/16W J	CF1001	QAX0349-001	C TRAP	47.25MHz
R1683	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	CF1131	QAX0639-001Z	C TRAP	4.500MHz
R1684	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	CF1161	QAX0642-001Z	C FILTER	4.500MHz
R1687	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	CF1501	CSB503F30-T2	C RESONATOR	
R1688	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	CF1701	CST8.00MTW	C RESONATOR	
R1701	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	CF1702	QAX0428-001	C RESONATOR	27.000MHz
R1702	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN100C	QGA2501F1-06	CONNECTOR	W-B (1-6)
R1704	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN100T	CHGC05-400	CONNECTOR ASSY	
R1705	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	CN100U	CHGC04-400	CONNECTOR ASSY	
R1706	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN100X	CH41169-R03Y	EH POST HEADER	
R1708	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN10CW	CH41169-R03Y	EH POST HEADER	
R1709	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	CN10E1	CHGT0015-0A	CONNECTOR ASSY	
R1710	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	CN10HV	QZ5004C1-06	CONNECTOR	(1-6)
R1713	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	△CN10PW	QMPD200-200-JC	POWER CORD(US/CA)	2m BLACK
R1714	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	CN110S	QGA2501C5-04Z	CONNECTOR	W-B (1-4)
R1715	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	△CN1DEG	QZ5004C1-02	CONNECTOR	(1-2)
R1716	NRSA63J-154X	MG RESISTOR	150kΩ 1/16W J	CN1MPX	QGA2501C5-05Z	CONNECTOR	W-B (1-5)
R1717	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	△F1901	QMF51N1-5R0-J5	FUSE	5A AC125V
R1719	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	△F1902	QMF51U1-1R25-J8	FUSE	1.25A AC125V
R1721	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	△FC1901	CEMG002-001Z	FUSE CLIP	(x2)
R1722	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	△FC1902	CEMG002-001Z	FUSE CLIP	(x2)
R1723	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	△FR1720	QZ9017-820	FUSI RESISTOR	82Ω 1/4W J
R1724	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	△H1001	CEHE012-001WU	HEAT SINK	
R1725	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	△H1002	LC30381-001A	HEAT SINK/FE-P/	
R1726	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J				
R1727	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J				


△Ref No.	Part No.	Part Name	DescriptionLocal
△H1003	LC30198-001A	HEAT SINK/AL-F/	
△H1004	CEHE014-001WU	HEAT SINK	
J1003	QNN0349-001	PIN JACK	V/L/R IN
J1004	QNN0348-001	PIN JACK	L/R IN
J1005	QNN0282-003	PIN JACK	V IN
J1006	CEMN065-002	PIN JACK	L IN
J1007	CEMN072-003	PIN JACK	R IN
J1602	QNS0155-001	3.5 JACK	HEADPHONE
K1003	QQR0582-001Z	FERRITE BEADS	
K1701	QQR0582-001Z	FERRITE BEADS	
△LF1901	QQR0864-002	LINE FILTER	
△RY1901	QSK0083-001	RELAY	
S1751	QSW0619-003Z	TACT SWITCH	POWER
S1752	QSW0619-003Z	TACT SWITCH	VOL +
S1753	QSW0619-003Z	TACT SWITCH	VOL -
S1754	QSW0619-003Z	TACT SWITCH	CH +
S1755	QSW0619-003Z	TACT SWITCH	CH -
S1756	QSW0619-003Z	TACT SWITCH	MENU
SF1101	CE42589-201	SAW FILTER	
△SK1371	QNZ0537-001	CRT SOCKET	
△TH1901	CEKP007-002	POSISTOR	
△TU1001	QAU0274-001	TUNER	
△VA1901	ERZV10V621CS	ZNR	
W1019	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
W1062	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
W1071	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
W1072	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
W1082	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
W1083	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
W1117	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
W1121	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
W1311	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
W1312	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
W1323	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
X1301	QAX0310-001Z	CRYSTAL	3.579545MHz
Y1205	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J
Y1541	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J

REMOTE CONTROL UNIT PARTS LIST (RM-C205-1C)

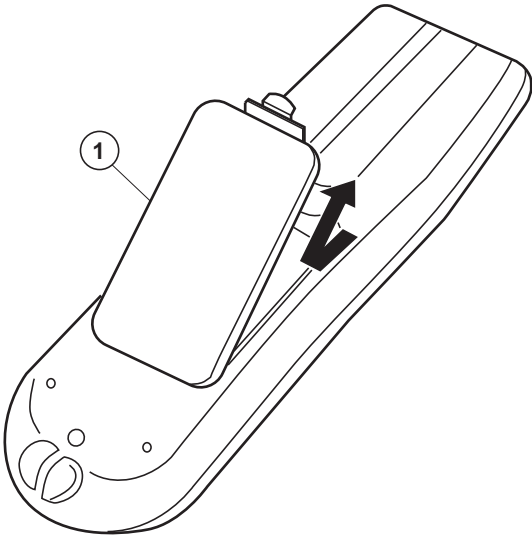

△ Ref.No.	Part No.	Part Name	Description	Local
1	511A24001	BATTERY COVER		

PACKING

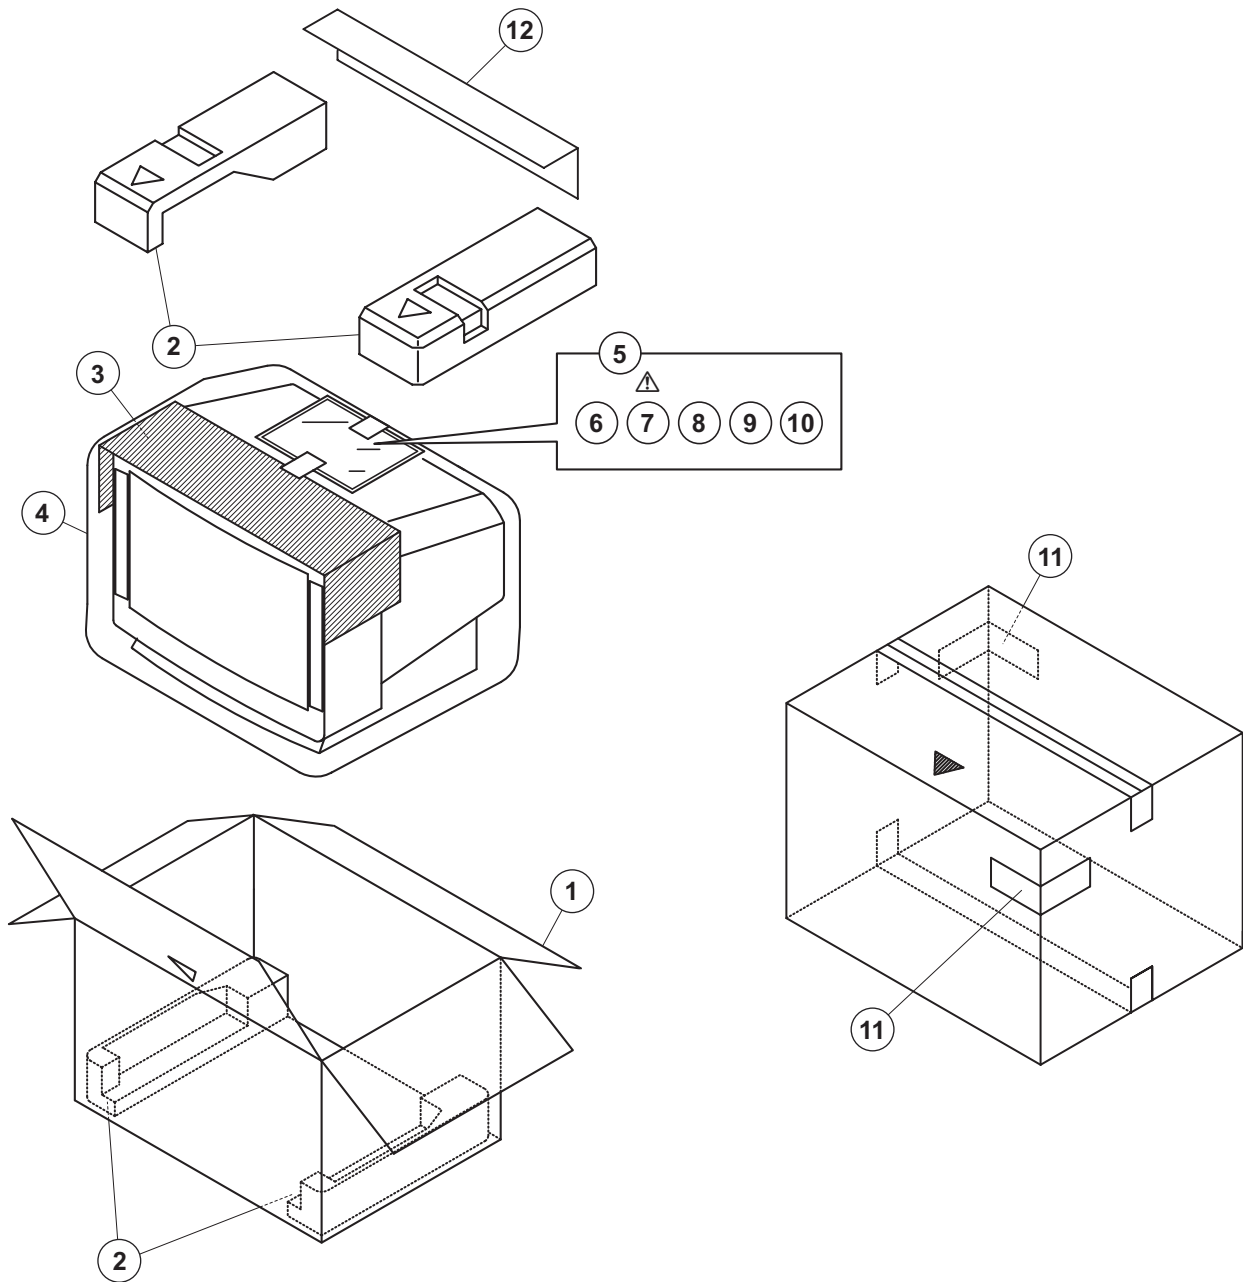

PACKING PARTS LIST

△ Ref.No.	Part No.	Part Name	Description	Local
1	GQ10009-011B-A	PACKING CASE		
2	GQ10021-001B-A	CUSHION ASSY	4pcs in 1set	
3	CP30055-001-A	TOP COVER		
4	CP30056-009-A	POLY BAG		
5	QPA02503505	POLY BAG	25cm x 35cm	
6	RM-C205-1C	REMOCON UNIT		
△ 7	LCT1401-001A-A	INST BOOK		
8	CM36042-00A-H	ROD ANTENNA		
9	CE42024-00BJ1	MATCHING BOX		
10	-----	BATTERY	(x2)	
11	CM36616-001-A	CORNER LABEL	2pcs in 1set	
12	GQ30043-003A-A	TOP PAD		