
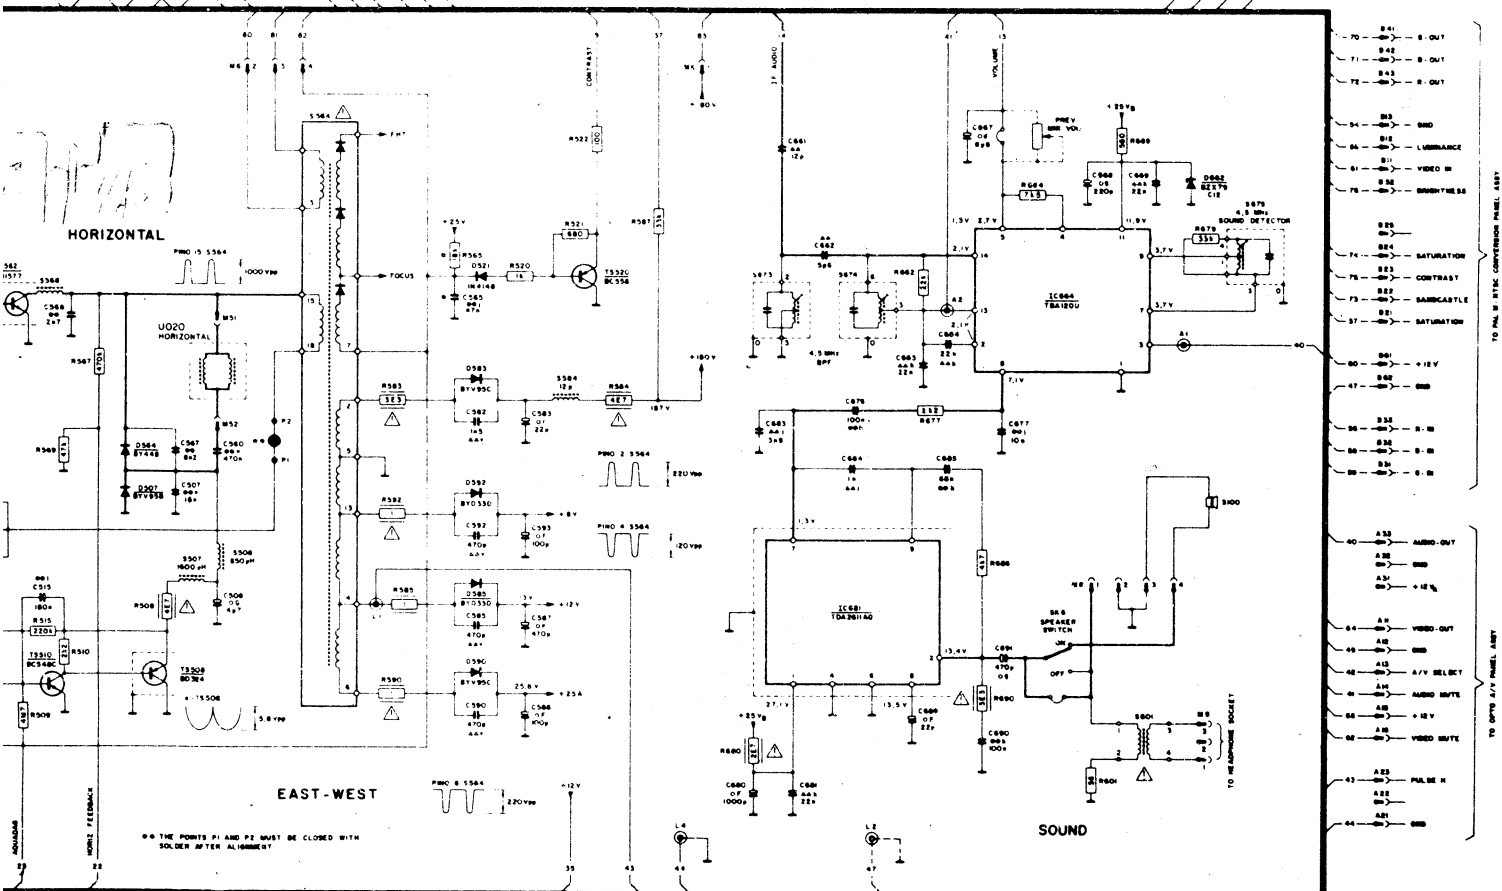


RGB AMPLIFIER

TURBO A 51-578 X-
ANODO-24,5KV
FOCO-4,7KV
G2-470V


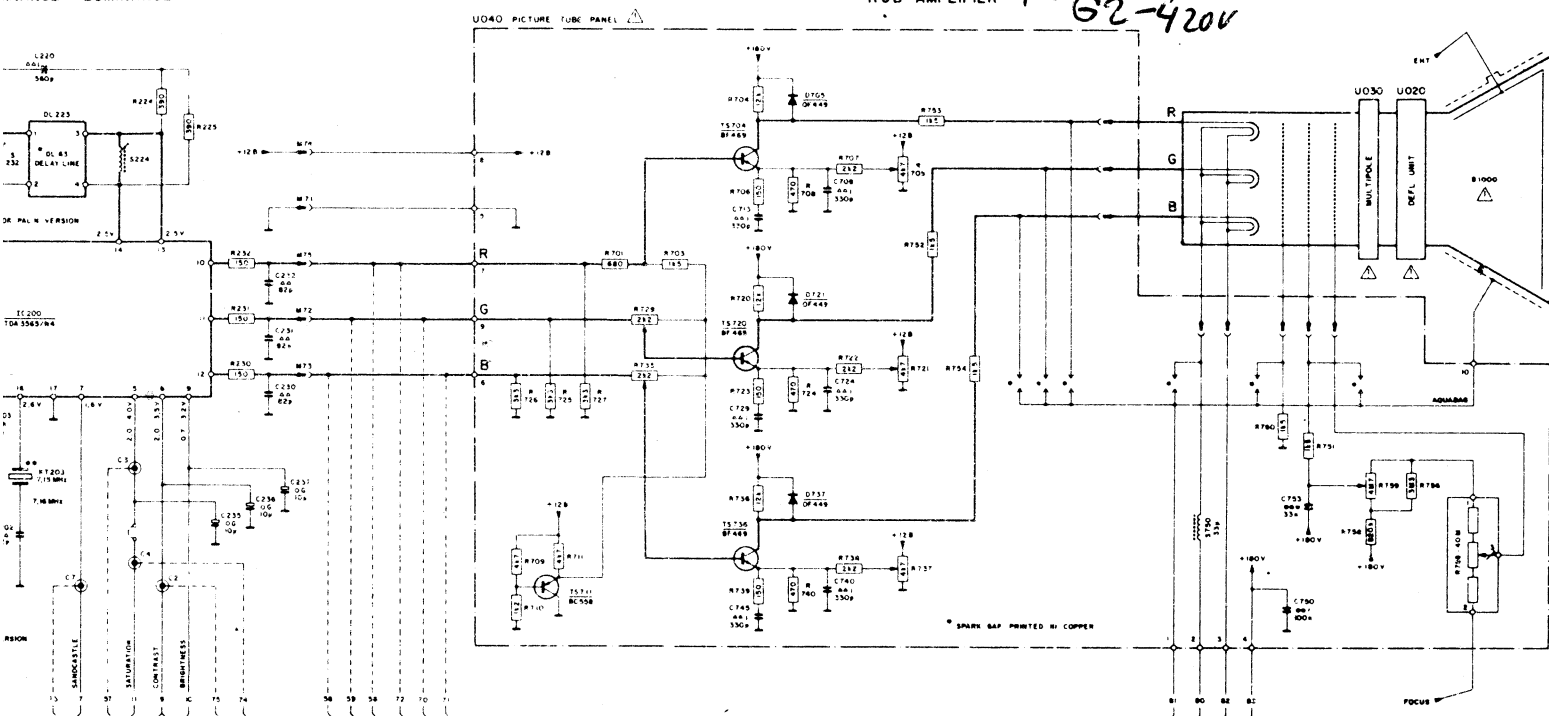


MANUAL DE CIRCUITOS DE TELEVISION

+ DET + AGC

CHROMINANCE + LUMINANCE



UO40 PICTURE TUBE

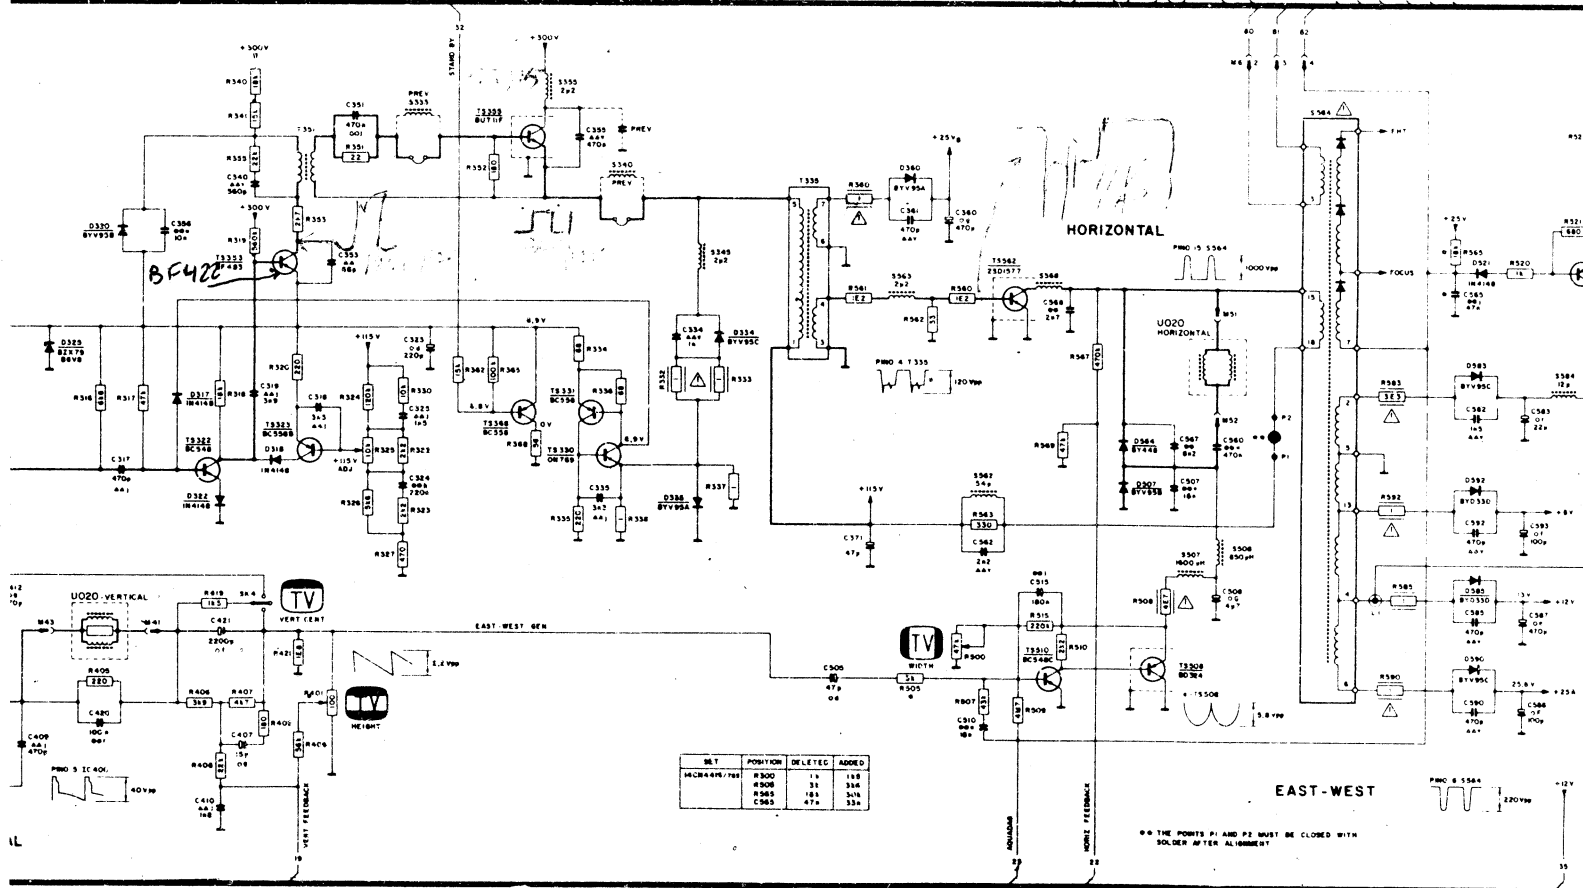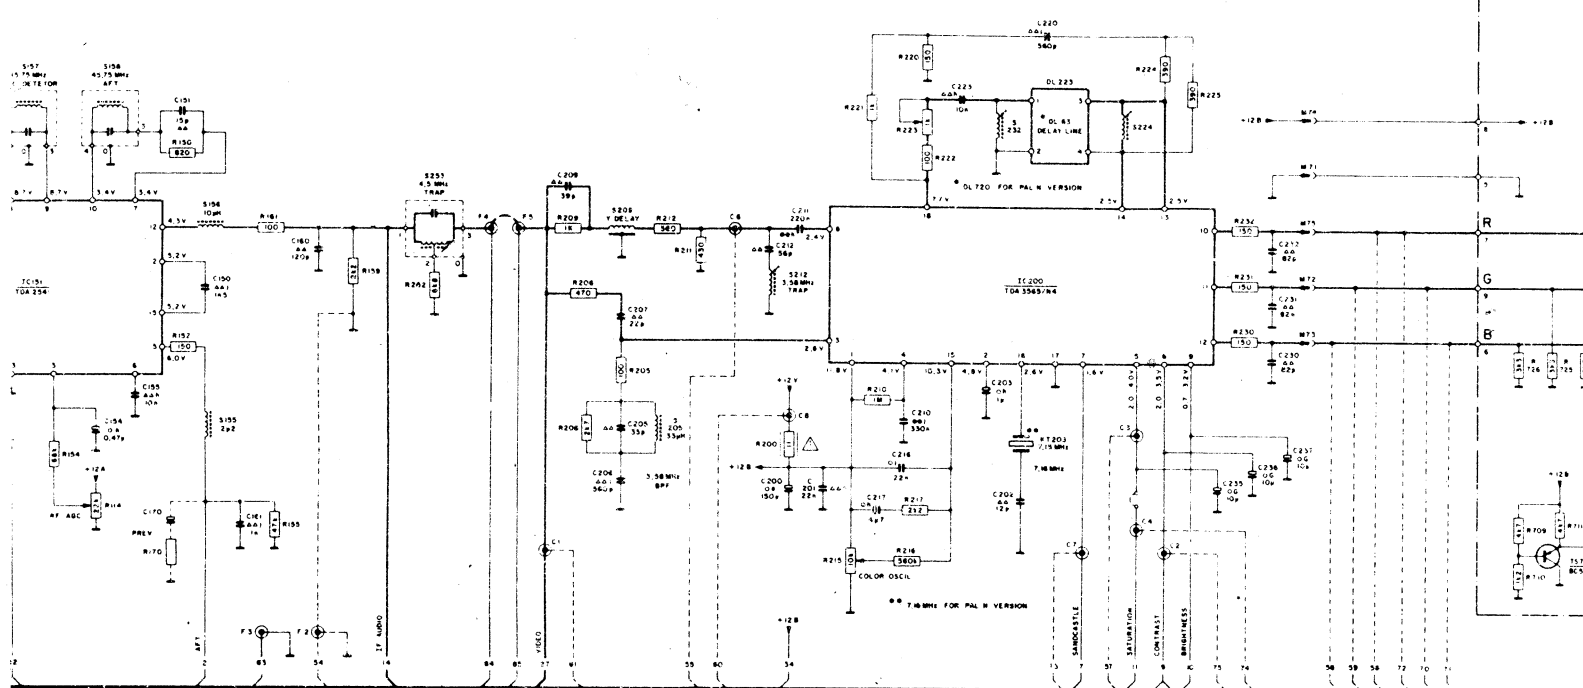


DET	POSITION	DELETED	ADDED
R300	14	148	
R308	31	316	
R365	181	316	
C365	474	334	

** THE POINTS P1 AND P2 MUST BE CLOSED WITH SOLDER AFTER ALIGNMENT

SI STAND BY POWER SUPPLY NO FUM
LA FUENTE NO RINDE

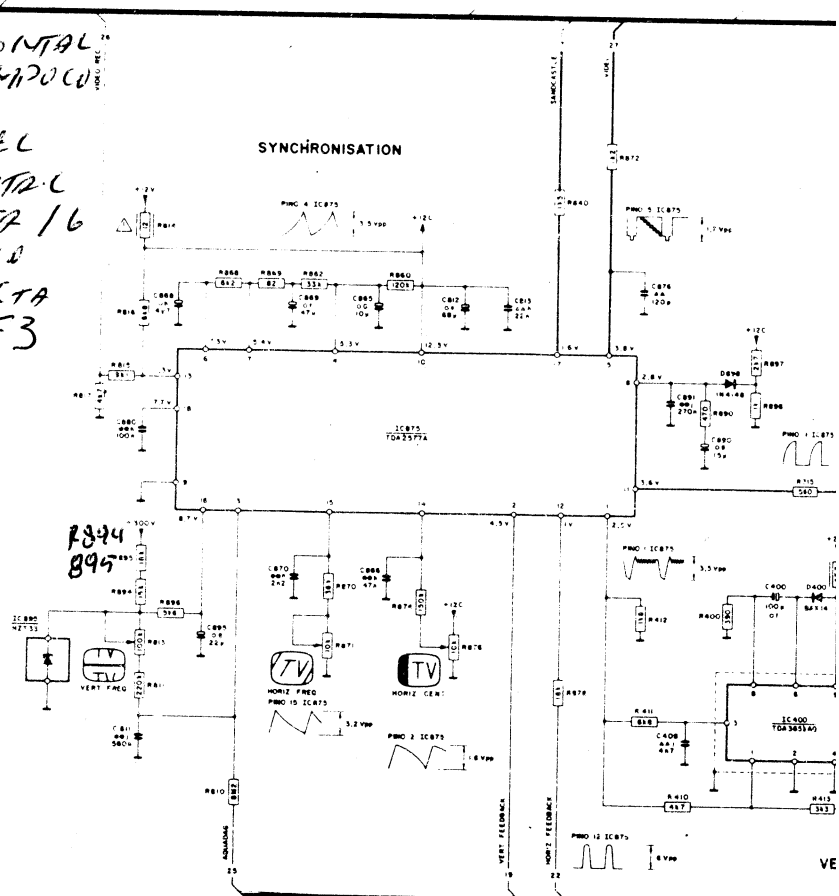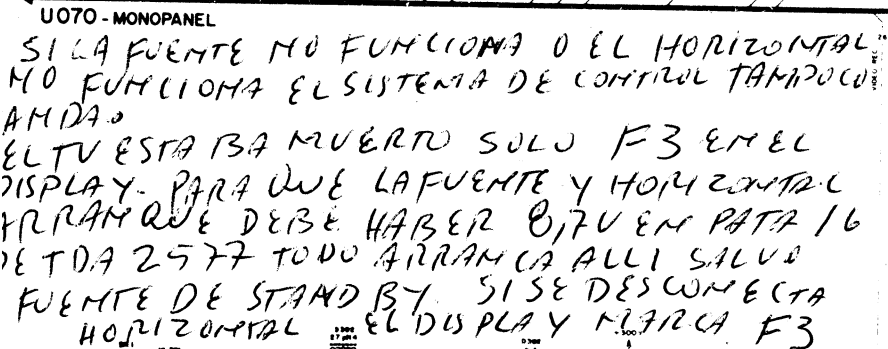


VF

REMARKS

SET	POSITION	DELETE
FOR MULTISYSTEM	RO56	560h
SERVICE SOLUTION	RO57	13h
	RO61	43h

2) IF SAB3037 IS CONFIGURED TO 28 P
INTO ACCOUNT THE PIN NUMBER WITHIN

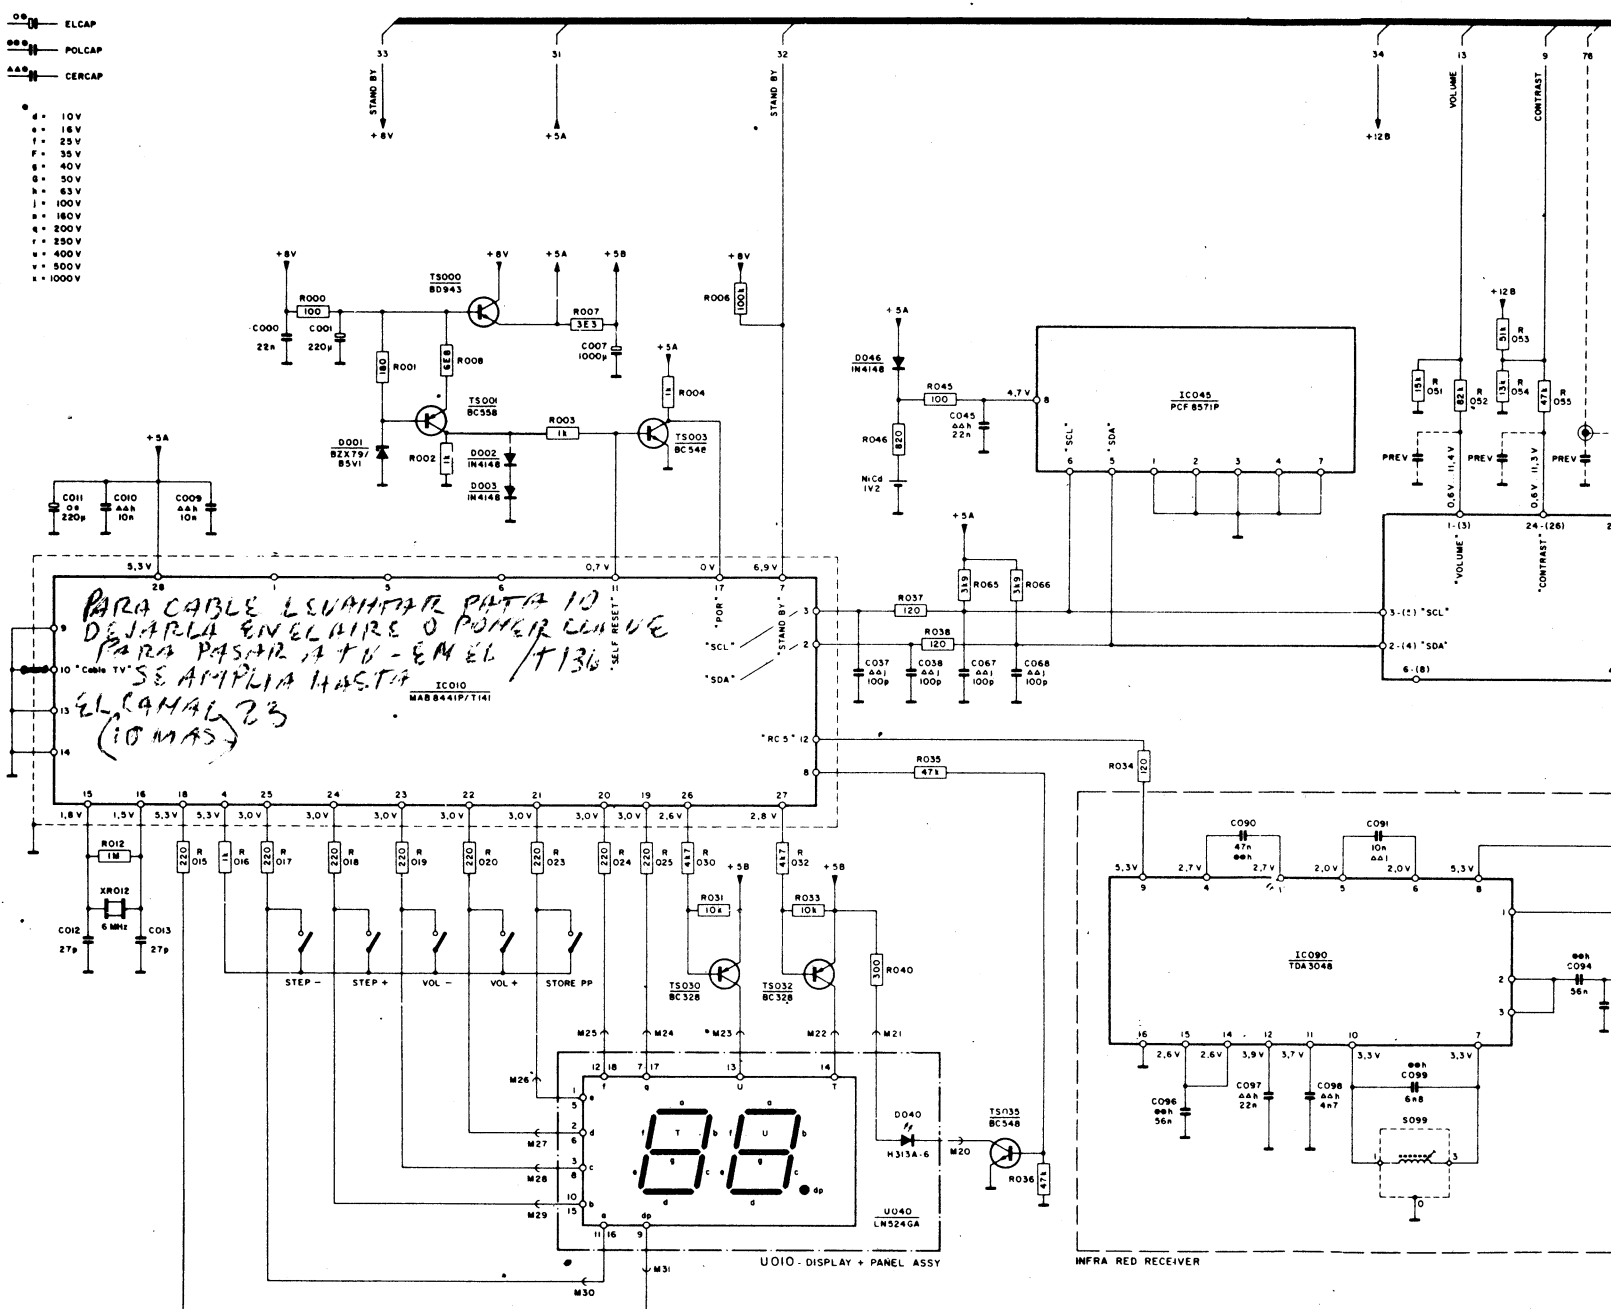

REMARKS

1) DERIVATED SETS

SET	POSITION	DELETED	ADDED
FOR MULTISYSTEM SERVICE SOLUTION	RO56	5604	221
	RO57	151	214
	RO51	431	—

2) IF SAB3037 IS CONFIGURED TO 28 PMS THEN TAKE INTO ACCOUNT THE PM NUMBER WITHIN ().


PMO 20 IC050



PMO 21 IC050



NUMERO ENTRE () DATA DEL INGENIERO U070-MONOPANEL (CONT.)

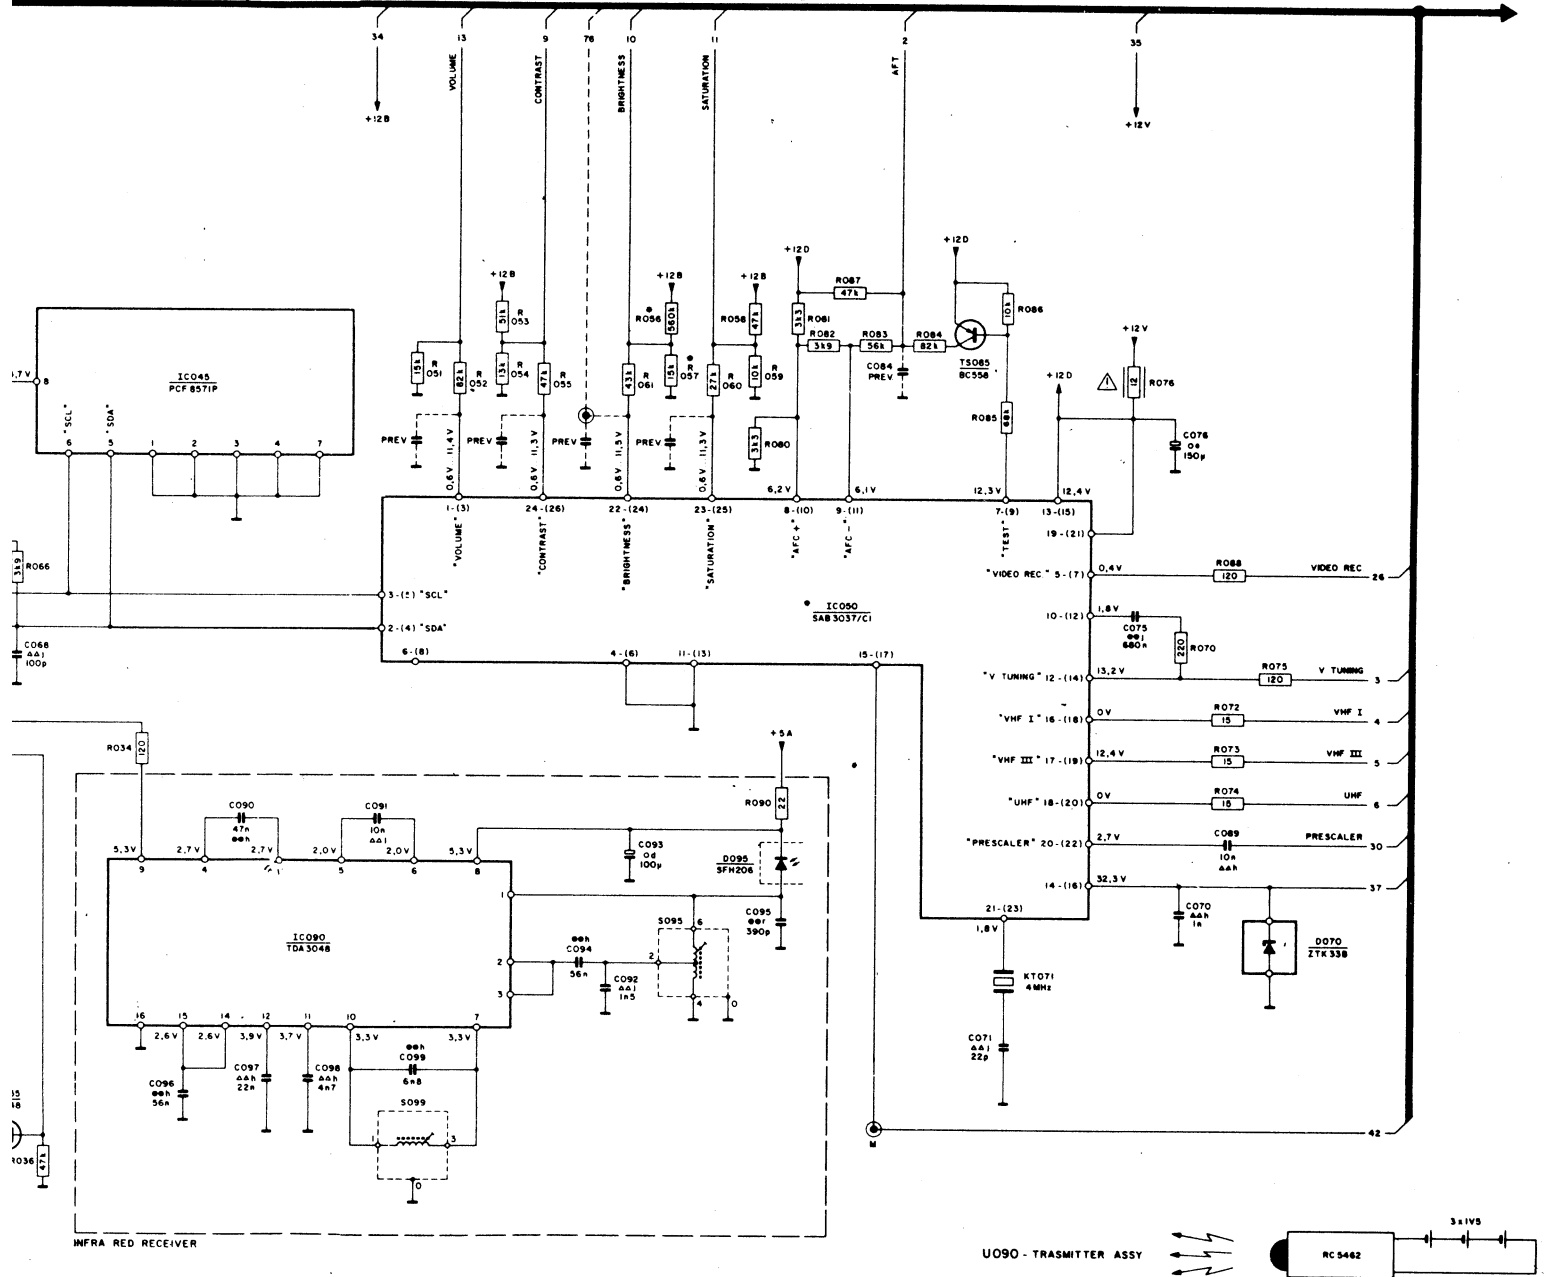

U090-TRANSMITTER ASSY

