


# CTV CHASSIS 12.1

6 BZ 820-02

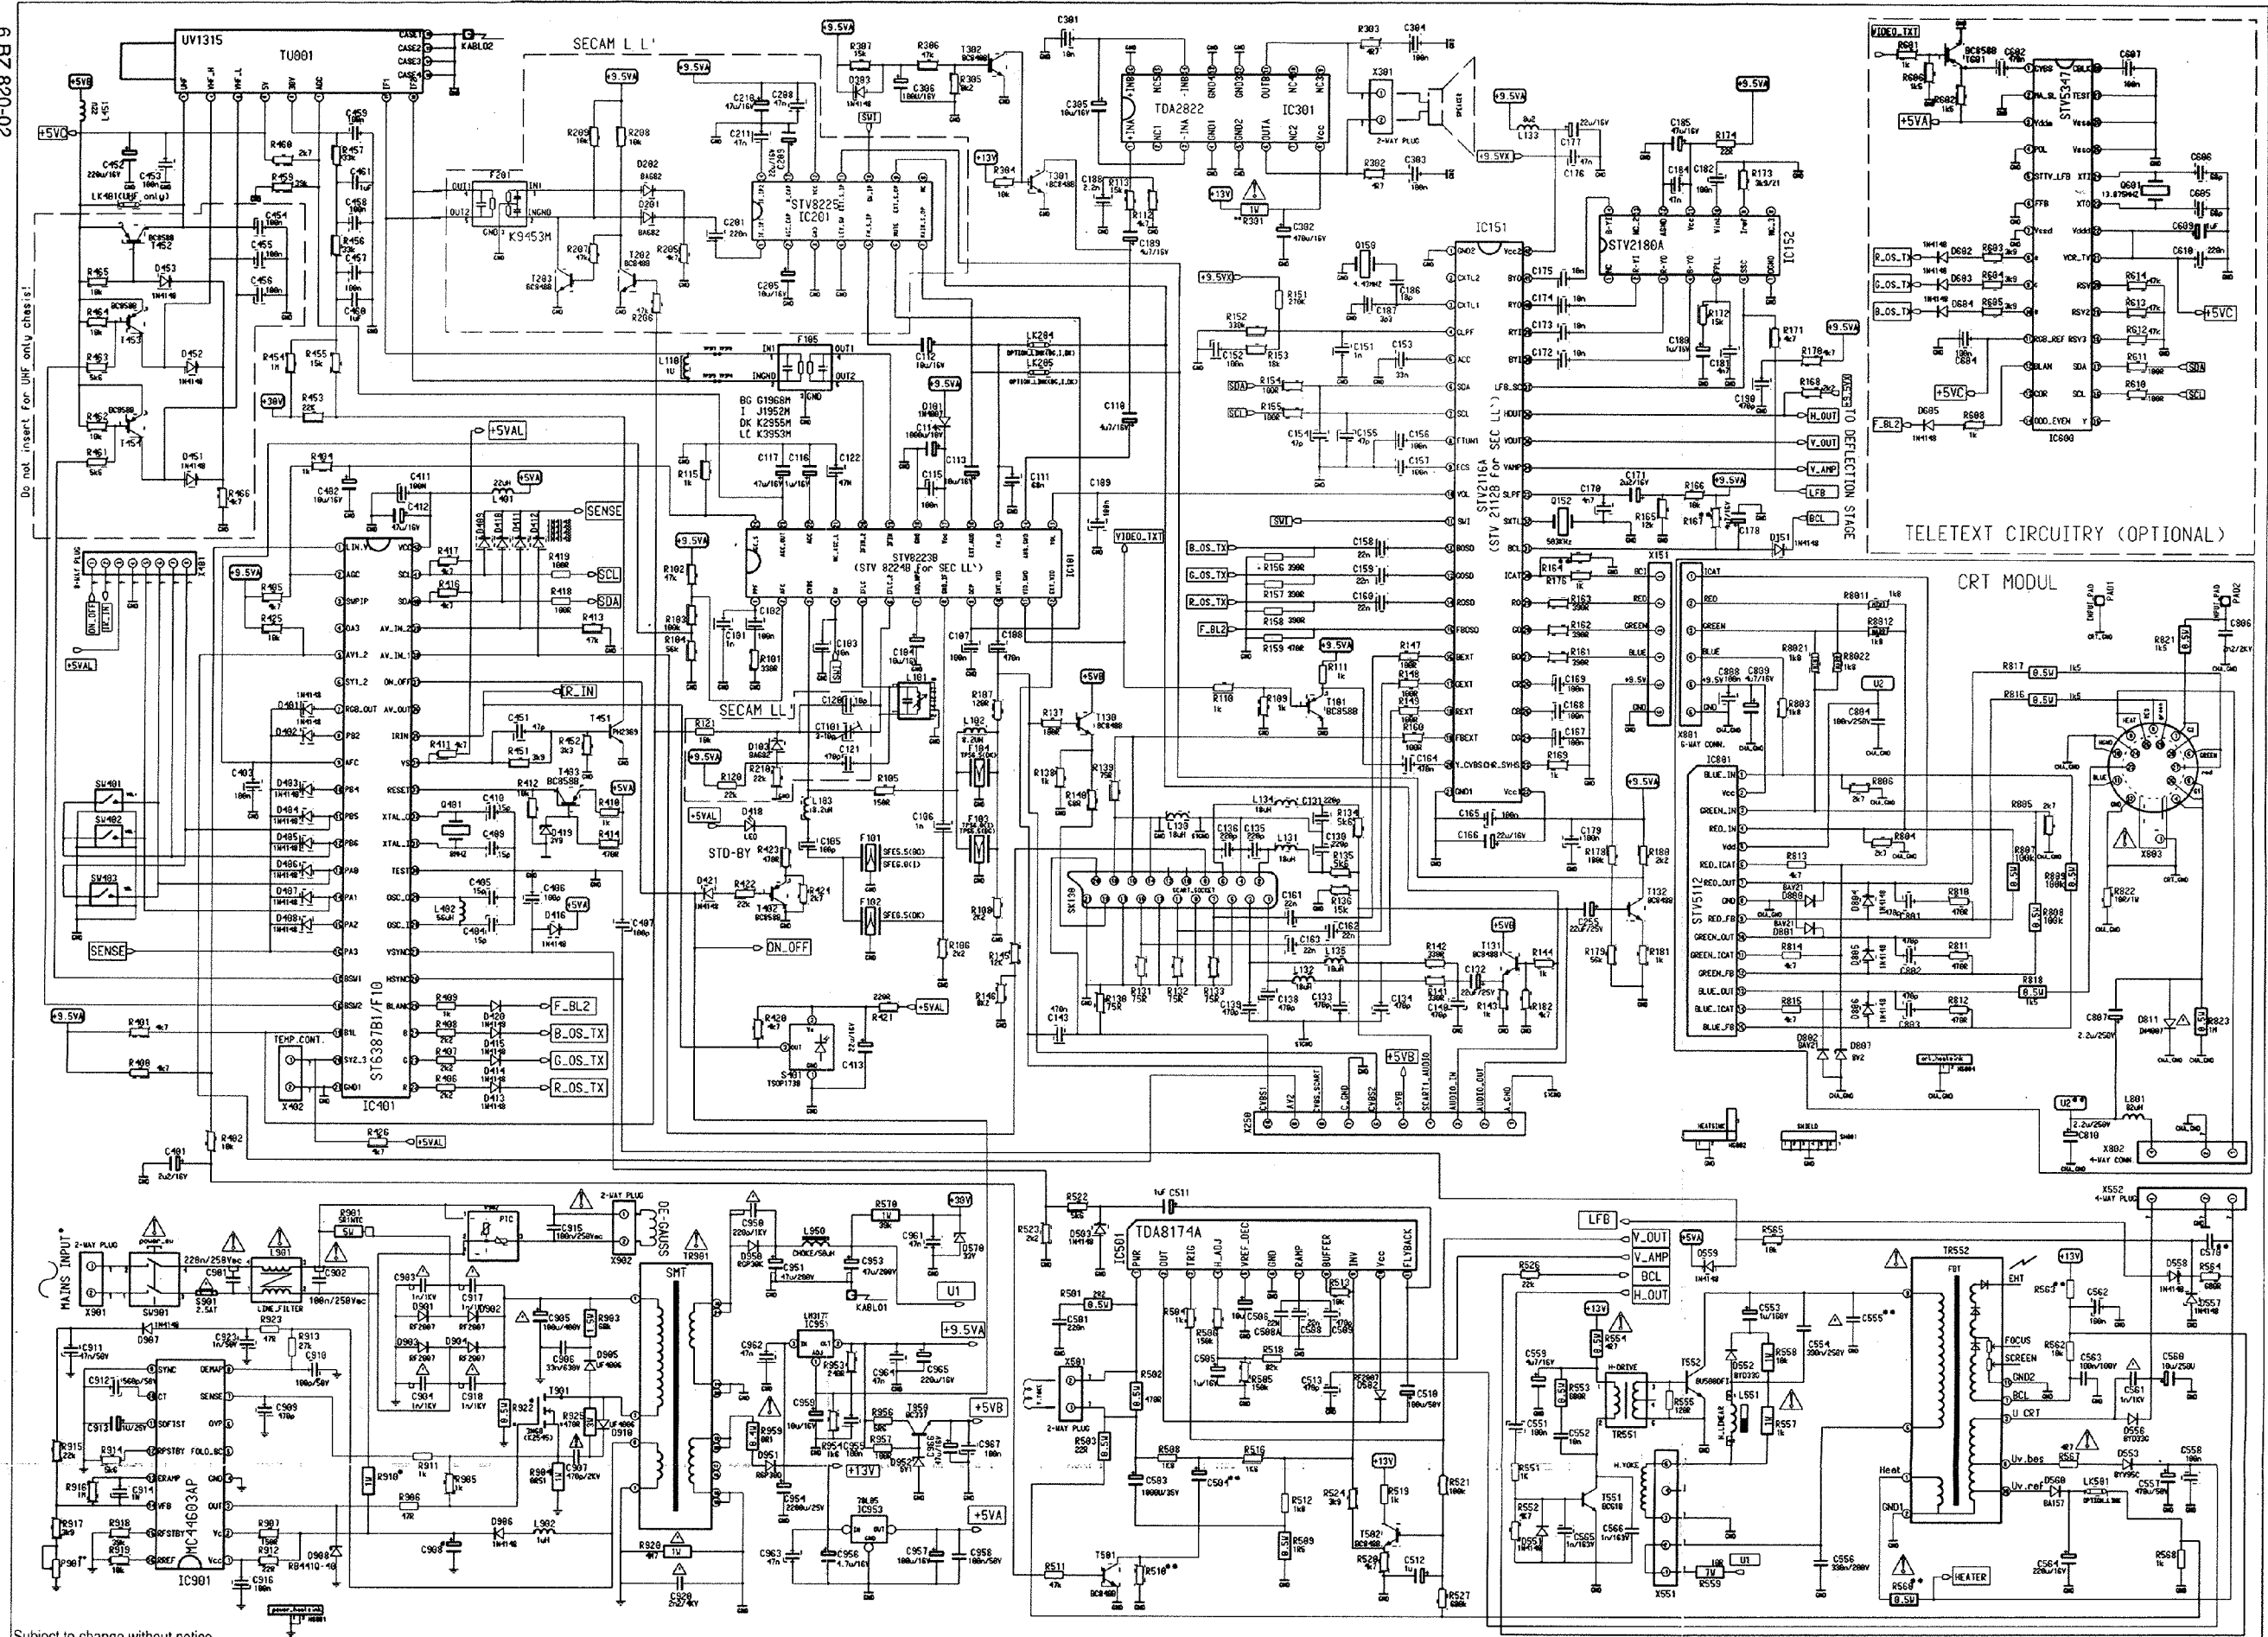

Subject to change without notice

D401: UHF ONLY TUNER  
D403: BACKGROUND FREE OSD  
D411: AV2  
D407: SEC L/L  
OSD\_LANG\_ENGLISH : D404  
OSD\_LANG\_FRENCH : D404 and D405  
OSD\_LANG\_GERMAN : D405  
OSD\_LANG\_ITALIAN : D402

\*Operation Range 105VAC~270VAC: R910= 47K; R922=470K; C908=68uF  
Operation Range 140VAC~270VAC: R910=120K; R922= -- ; C908=47uF

EMC related components: C130,C131,C133,C134,C135,C136,C138,C139

\*\* 14" SAMSUNG CPT: U1=108V; R510=150R; R560=1R2; R563=8k2; C504=100uF; C555=6n8F; R164=47k; R167=220k; J2=185V; P901=1k5; R527=open; R301=3R3; C570=open  
14" LG CPT: U1=104V; R510=150R; R560=1R2; R563=8k2; C504=100uF; C555=6n8F; R164=47k; R167=220k; J2=185V; P901=1k5; R527=680k; R301=3R3; C570=open  
14" PHILIPS CPT: U1=107V; R510=150R; R560=1R2; R563=8k2; C504=100uF; C555=6n8F; R164=47k; R167=220k; J2=185V; P901=1k5; R527=680k; R301=3R3; C570=open  
14" TRICO CPT: U1=113V; R510=150R; R560=1R2; R563=8k2; C504=100uF; C555=6n8F; R164=47k; R167=220k; J2=185V; P901=1k5; R527=open; R301=3R3; C570=open  
20" SAMSUNG CPT: U1=121V; R510=100R; R560=R47; R563=6k8; C504=220uF; C555=3n1F; R164=15k; R167=100k; J2=220V; P901=2k2; R527=open; R301=2R2; C570=10nF  
20" LG CPT: U1=117V; R510=100R; R560=R22; R563=6k8; C504=220uF; C555=8n2F; R164=15k; R167=100k; J2=220V; P901=2k2; R527=open; R301=2R2; C570=10nF  
21" SAMSUNG CPT: U1=119V; R510=100R; R560=R47; R563=6k8; C504=220uF; C555=8n2F; R164=15k; R167=100k; J2=220V; P901=2k2; R527=680k; R301=2R2; C570=10nF  
21" LG CPT: U1=113V; R510=100R; R560=R10; R563=6k8; C504=220uF; C555=8n2F; R164=15k; R167=100k; J2=220V; P901=2k2; R527=680k; R301=2R2; C570=10nF

