



TV-AS145 NH

SERVICE MANUAL

COLOR TELEVISION

- Replace this Service Manual with "Revision Publishing" when it is issued.

aiwa
S/M Code No. 09-001-421-0T2

SIMPLE

DATA

ELECTRICAL MAIN PARTS LIST - 1/4

NOTE: The characters in the suffix column indicate the part usage.

REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
NHST1L	XX	A
		KANRI		
C	808	87-016-582-080	0E BVI T3+3-10	A
C	807	87-016-587-080	0E CAP,E 47-25 SSL	A
C	809	87-018-209-080	0E CAP,E 1000-25 SSL	A
C	801	87-A10-374-010	0E CAP, CER 0.1-50V	A
C	804	87-A10-374-010	1A CAP,M/P 0.1-275 K RMR	A
C	816	87-012-388-010	1A CAP,M/P 0.1-275 K RMR	A
C	813	87-016-094-010	1B CAP,CER 2200P-125 UL	A
C	818	87-016-587-080	1F CAP,E 470-200 SMH	A
C	810	87-016-628-080	0E CAP,E 1000-25 SSL	A
C	812	87-A10-867-090	0E CAP,E 10-25 SSL	A
C	811	87-A10-867-090	CAP,CER 2200P-2K K R	A
C	815	87-A11-319-080	CAP,CER 2200P-2K K R	A
C	817	87-A11-319-080	CAP,E 22-160 M 105 YXA	A
CN	802	82-481-649-010	CAP,E 22-160 M 105 YXA	A
CN	801	87-099-674-010	0E PLUG,2P MINI(*)	A
D	806	87-017-931-080	0E CONN,2P VA V	A
D	808	87-020-465-080	0E ZENER,MTZJ5.6B	A
D	809	87-020-465-080	0E DIODE,1SS133 (110MA)	A
D	804	87-070-274-080	0E DIODE,1SS133 (110MA)	A
D	807	87-070-274-080	0E DIODE,1N4003 SEM	A
D	805	87-070-274-080	0E DIODE,1N4003 SEM	A
D	803	87-070-274-080	0E DIODE,1N4003 SEM	A
D	802	87-070-274-080	0E DIODE,1N4003 SEM	A
D	801	87-070-274-080	0E DIODE,1N4003 SEM	A
D	810	87-070-274-080	0E DIODE,1N4003 SEM	A
D	811	87-A40-328-010	1B DIODE,GBU4JL	A
D	820	8Z-JBH-606-010	VRIS,TNR15G271K	A
FC	801	87-A90-160-080	0E FUSE CLAMP,FC 51F	A
FC	802	87-A90-160-080	0E FUSE CLAMP,FC 51F	A
IC	801	87-A21-290-010	IC,STR30110	A
L	801	8Z-JBH-613-010	FLTR,LINE ELF15N013A	A
Q	803	89-111-755-080	0E TR,2SA1175F	A
Q	802	89-320-012-080	0E TR,2SC2001L	A
Q	801	89-327-854-080	0E TR,2SC2785F	A
R	809	87-A00-277-090	1A RES,CEM 2.2-10W J RGC	A
R	801	8Z-JBH-629-080	RES,SD 2.2M-1/2W K ERC 12UG	A
R	816	87-025-425-080	0E RES,M/F 12K-1/6W F	A
R	811	87-A00-189-010	1B RES,CEM 220-15W J ZY	A
RY	801	87-A90-358-010	1B RELAY,12V LK1AF	A
T	801	8Z-JBH-614-010	PT,US TP8155T	A
TH	801	87-A90-996-010	1B POS-THMS,S1481-B50-A10	A
		87-067-579-010	0E TAPPING SCREW, BVT2+3-8	A
C	404	87-016-574-080	0E CAP,E 100-16 SSL	A
C	401	87-016-577-080	0E CAP,E 470-16 SSL	A
C	402	87-016-577-080	0E CAP,E 470-16 SSL	A
C	403	87-016-577-080	0E CAP,E 470-16 SSL	A
C	406	87-016-630-080	0E CAP,E 0.22-50 SSL	A
C	407	87-016-630-080	0E CAP,E 0.22-50 SSL	A
C	405	87-016-636-080	0E CAP,E 4.7-50 SSL	A
C	413	87-016-624-080	0E CAP,E 10-16 SSL	A
C	414	87-016-624-080	0E CAP,E 10-16 SSL	A
C	412	87-016-624-080	0E CAP,E 10-16 SSL	A
C	411	87-016-624-080	0E CAP,E 10-16 SSL	A
C	410	87-016-624-080	0E CAP,E 10-16 SSL	A
CN	401	87-049-469-010	0E CONN,4P V	A
D	405	87-070-274-080	0E DIODE,1N4003 SEM	A
D	402	87-A40-523-080	0E ZENER,MTZJ9.1B	A
D	404	87-A40-523-080	0E ZENER,MTZJ9.1B	A
D	403	87-A40-523-080	0E ZENER,MTZJ9.1B	A
D	401	87-A40-523-080	0E ZENER,MTZJ9.1B	A
FR	401	87-A00-492-090	RES,FUSE 6.8-2W J	A
IC	402	87-027-666-010	1B IC,TC4052BP	A
IC	401	87-A21-090-010	IC,LA4600	A
J	401	87-A60-322-110	1B JACK,PIN 3P Y-W-R W/SW	A
J	403	87-A60-420-010	1A JACK,3.5 ST (MSC)	A
J	402	8Z-JBH-616-010	JACK,PIN 3P Y	A
Q	401	87-026-245-080	0E TR,DTC114ES	A
Q	402	89-327-854-080	0E TR,2SC2785F	A
Q	403	89-327-854-080	0E TR,2SC2785F	A
		84-LB3-216-010	0E HLDR,LED	A
C	7	87-016-621-080	0E CAP,E 220-10 SSL	A
C	1	87-016-624-080	0E CAP,E 10-16 SSL	A
C	5	87-016-633-080	0E CAP,E 1-50 SSL	A
C	2	87-018-134-080	0E CAPACITOR,TC-U 0.01-16	A
C	3	87-018-134-080	0E CAPACITOR,TC-U 0.01-16	A
C	4	87-018-196-080	0E CAP, CER 1500P-16V	A
C	19	87-016-629-080	0E CAP,E 0.1-50 SSL	A
C	16	87-016-633-080	0E CAP,E 1-50 SSL	A
C	15	87-018-123-080	0E CAP, CER 220P-50V	A
C	18	87-018-128-080	0E CAP, CERA-SOL SS 560P	A
C	17	87-018-131-080	0E CAP, CER 1000P-50V	A
C	23	87-018-123-080	0E CAP, CER 220P-50V	A
C	24	87-018-131-080	0E CAP, CER 1000P-50V	A
CN	1	87-009-195-010	0E CONN,5P B5BEH	A
D	4	87-017-931-080	0E ZENER,MTZJ5.6B	A

ELECTRICAL MAIN PARTS LIST - 2/4

D	1	87-070-110-010	OE	LED,SLP-181B-51	A.....
IC	4	87-A20-611-080	OE	IC,M51943BSL-700A	A.....
IC	3	87-A21-433-010		IC,KS24C041I	A.....
IC	2	87-A91-538-010		RCR UNIT,SBX1981-72P	A.....
IC	1	8Z-JBH-621-010	2A	IC,M37272M8-***SP	A.....
JW	1	8Z-JBH-635-080		COIL,CORE BL01RN1-A62	A.....
JW	16	87-003-147-080	OE	COIL, 22UH	A.....
L	2	87-005-614-080	OE	COIL 100UH LAV35 J	A.....
Q	2	87-026-269-080	OE	TR,DTA114ES	A.....
Q	4	89-111-755-080	OE	TR,2SA1175F	A.....
Q	3	89-327-854-080	OE	TR,2SC2785F	A.....
SW	5	87-A90-712-080	OE	SW,TACT EVQ11L07K	A.....
SW	3	87-A90-712-080	OE	SW,TACT EVQ11L07K	A.....
SW	2	87-A90-712-080	OE	SW,TACT EVQ11L07K	A.....
SW	1	87-A90-712-080	OE	SW,TACT EVQ11L07K	A.....
SW	7	87-A90-712-080	OE	SW,TACT EVQ11L07K	A.....
SW	4	87-A90-712-080	OE	SW,TACT EVQ11L07K	A.....
SW	6	87-A90-712-080	OE	SW,TACT EVQ11L07K	A.....
X	1	87-030-212-080	1A	CERA LOCK CST8.0M	A.....
C	104	87-016-621-080	OE	CAP,E 220-10 SSL	A.....
C	101	87-016-636-080	OE	CAP,E 4.7-50 SSL	A.....
C	205	87-016-577-080	OE	CAP,E 470-16 SSL	A.....
C	209	87-016-627-080	OE	CAP,E 47-16 SSL	A.....
C	207	87-016-632-080	OE	CAP,E 0.47-50 SSL	A.....
C	203	87-016-632-080	OE	CAP,E 0.47-50 SSL	A.....
C	201	87-018-134-080	OE	CAPACITOR,TC-U 0.01-16	A.....
C	202	87-018-134-080	OE	CAPACITOR,TC-U 0.01-16	A.....
C	204	87-018-134-080	OE	CAPACITOR,TC-U 0.01-16	A.....
C	208	87-018-134-080	OE	CAPACITOR,TC-U 0.01-16	A.....
C	206	87-A10-287-080		CAP,M 2200P-50 J	A.....
C	215	87-016-632-080	OE	CAP,E 0.47-50 SSL	A.....
C	214	87-016-632-080	OE	CAP,E 0.47-50 SSL	A.....
C	211	87-018-115-080	OE	CAP, CER 47P-50V	A.....
C	210	87-018-115-080	OE	CAP, CER 47P-50V	A.....
C	703	87-015-464-080	1A	CAP,E 4.7-16 BP	A.....
C	708	87-016-624-080	OE	CAP,E 10-16 SSL	A.....
C	706	87-016-633-080	OE	CAP,E 1-50 SSL	A.....
C	709	87-016-636-080	OE	CAP,E 4.7-50 SSL	A.....
C	707	87-016-636-080	OE	CAP,E 4.7-50 SSL	A.....
C	704	87-A10-292-080	OE	CAP,M 5600P-50 J	A.....
C	705	87-A10-296-080		CAP,M 0.012-50 J	A.....
C	713	87-015-464-080	1A	CAP,E 4.7-16 BP	A.....
C	717	87-015-464-080	1A	CAP,E 4.7-16 BP	A.....
C	711	87-015-464-080	1A	CAP,E 4.7-16 BP	A.....
C	716	87-016-301-080	1A	CAP,TN 3.3-16K DN	A.....
C	718	87-016-302-080	1A	CAP,TN 10-16K DN	A.....
C	710	87-016-574-080	OE	CAP,E 100-16 SSL	A.....
C	719	87-016-633-080	OE	CAP,E 1-50 SSL	A.....
C	712	87-016-636-080	OE	CAP,E 4.7-50 SSL	A.....
C	714	87-A10-288-080		CAP,M 2700P-50 J	A.....
CF	201	84-LB3-626-010	1A	FLTR,TPS4.5MB2	A.....
CF	202	87-008-574-080	1A	FLTR,SFSH4.5MCB	A.....
D	101	87-002-743-080	OE	ZENER,MTZJ 33B	A.....
D	104	87-017-931-080	OE	ZENER,MTZJ5.6B	A.....
D	103	87-017-931-080	OE	ZENER,MTZJ5.6B	A.....
D	102	87-070-136-080	OE	ZENER,MTZJ5.1B	A.....
IC	701	8Z-JBH-605-010	2A	IC,CXA2104S	A.....
L	207	87-003-147-080	OE	COIL, 22UH	A.....
L	203	87-003-148-080	OE	COIL BIAS 33UH	A.....
L	204	87-003-282-080	OE	COIL,12UH	A.....
L	206	87-005-612-080	OE	COIL,68UH J LAV35	A.....
L	205	8Z-JBH-610-010		COIL,PIF-SQ57EL349A 45.75MHZ	A.....
L	201	8Z-JBR-612-010		COIL,SIF 4.5MHZ 504BN	A.....
L	701	87-005-614-080	OE	COIL 100UH LAV35 J	A.....
Q	201	89-327-854-080	OE	TR,2SC2785F	A.....
Q	701	89-327-854-080	OE	TR,2SC2785F	A.....
R	107	87-A00-331-090	OE	RES,M/F 27K-2W J RSF(S)	A.....
R	110	87-A00-160-090	OE	RES,M/F 33-2W J RSF(S)	A.....
R	706	87-A00-130-080	OE	RES,M/F 62K-1/6W F	A.....
SF	201	8Z-JBH-633-010		FLTR,SAW M1969-US	A.....
TU	101	8Z-JBE-610-010		TU UNIT,USA ENV56D74G3	A.....
BT	301	87-JBC-625-010	1A	CONN ASSY,5P V WHT TV-NK	A.....
C	303	87-016-624-080	OE	CAP,E 10-16 SSL	A.....
C	302	87-016-624-080	OE	CAP,E 10-16 SSL	A.....
C	301	87-016-624-080	OE	CAP,E 10-16 SSL	A.....
C	308	87-016-632-080	OE	CAP,E 0.47-50 SSL	A.....
C	304	87-016-637-080	OE	CAP,E 10-50 SSL	A.....
C	305	87-018-134-080	OE	CAPACITOR,TC-U 0.01-16	A.....
C	309	87-018-147-080	OE	CAP,TC-U 10P-50 CH	A.....
C	306	87-A10-112-080	OE	CAP,E 100-10 SSL	A.....
C	307	87-A10-299-080	OE	CAP,M 0.022-50 J	A.....
C	319	87-016-575-080	OE	CAP,E 220-16 SSL	A.....
C	317	87-016-634-080	OE	CAP,E 2.2-50 SSL	A.....
C	310	87-018-119-080	OE	CAP, CER 100P-50V	A.....
C	315	87-018-131-080	OE	CAP, CER 1000P-50V	A.....
C	314	87-018-134-080	OE	CAPACITOR,TC-U 0.01-16	A.....
C	318	87-018-134-080	OE	CAPACITOR,TC-U 0.01-16	A.....
C	311	87-018-209-080	OE	CAP, CER 0.1-50V	A.....
C	313	87-018-209-080	OE	CAP, CER 0.1-50V	A.....
C	312	87-018-209-080	OE	CAP, CER 0.1-50V	A.....
C	316	87-A10-378-080	OE	CAP,E 2.2-50 K SH	A.....
C	328	87-016-624-080	OE	CAP,E 10-16 SSL	A.....

ELECTRICAL MAIN PARTS LIST - 3/4

C	323	87-016-625-080	0E	CAP,E 22-16 SSL	A.....
C	325	87-016-632-080	0E	CAP,E 0.47-50 SSL	A.....
C	324	87-016-632-080	0E	CAP,E 0.47-50 SSL	A.....
C	321	87-016-636-080	0E	CAP,E 4.7-50 SSL	A.....
C	320	87-018-196-080	0E	CAP, CER 1500P-16V	A.....
C	335	87-016-574-080	0E	CAP,E 100-16 SSL	A.....
C	338	87-016-632-080	0E	CAP,E 0.47-50 SSL	A.....
C	330	87-016-633-080	0E	CAP,E 1-50 SSL	A.....
C	332	87-018-134-080	0E	CAPACITOR,TC-U 0.01-16	A.....
C	334	87-018-134-080	0E	CAPACITOR,TC-U 0.01-16	A.....
C	336	87-018-209-080	0E	CAP, CER 0.1-50V	A.....
C	342	87-016-633-080	0E	CAP,E 1-50 SSL	A.....
C	344	87-018-109-080	0E	CAP, CER 22P-50V	A.....
C	343	87-018-131-080	0E	CAP, CER 1000P-50V	A.....
D	308	87-A40-348-080	0E	ZENER,MTZJ3.3A	A.....
D	307	87-A40-523-080	0E	ZENER,MTZJ9.1B	A.....
D	302	87-A40-523-080	0E	ZENER,MTZJ9.1B	A.....
D	305	87-A40-523-080	0E	ZENER,MTZJ9.1B	A.....
D	306	87-A40-523-080	0E	ZENER,MTZJ9.1B	A.....
D	304	87-A40-523-080	0E	ZENER,MTZJ9.1B	A.....
D	301	87-A40-523-080	0E	ZENER,MTZJ9.1B	A.....
D	309	87-A40-611-080		ZENER,MTZJ3.9B	A.....
D	317	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	312	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	311	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	315	87-A40-286-080	0E	DIODE,RGP10JE-5025	A.....
D	314	87-A40-520-080	0E	ZENER,MTZJ11B	A.....
IC	303	87-002-421-010		IC,NJM2233BL	A.....
IC	302	87-A20-364-010	1A	IC,KIA7809PI	A.....
IC	301	87-A21-239-010		IC,TA1201CN	A.....
JW	26	8Z-JBH-635-080		COIL,CORE BL01RN1-A62	A.....
Q	302	89-110-154-080	0E	TR,2SA1015Y	A.....
Q	301	89-111-755-080	0E	TR,2SA1175F	A.....
Q	308	89-111-755-080	0E	TR,2SA1175F	A.....
Q	307	89-111-755-080	0E	TR,2SA1175F	A.....
Q	309	89-111-755-080	0E	TR,2SA1175F	A.....
R	309	87-025-425-080	0E	RES,M/F 12K-1/6W F	A.....
R	307	87-025-427-080	0E	RES,M/F 27K-1/6W F	A.....
R	312	87-A00-356-090		RES,M/F 22-2W J RSS2X	A.....
X	302	87-030-327-010	0E	VIB,CER CSB503F30	A.....
X	301	87-A70-007-080	1B	VIB,XTAL 3.58MHZ AQC-1001	A.....
C	907	87-016-577-080	0E	CAP,E 470-16 SSL	A.....
C	908	87-016-627-080	0E	CAP,E 47-16 SSL	A.....
C	903	87-018-124-080	0E	CAP, CER 270P-50V	A.....
C	902	87-018-124-080	0E	CAP, CER 270P-50V	A.....
C	904	87-018-124-080	0E	CAP, CER 270P-50V	A.....
C	901	87-A10-833-090	0E	CAP,CER 1000P-2K K R	A.....
CN	902	87-009-033-010	0E	CONNECTOR, 5P	A.....
CN	901	87-049-469-010	0E	CONN,4P V	A.....
CN	903	87-A60-485-010		CONN,2P V LV GRA	A.....
D	903	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	901	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	902	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	904	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
L	901	87-005-615-080	0E	COIL,120UH J LAV35	A.....
Q	902	87-A30-176-010	0E	TR,2SC1573A P/Q/R	A.....
Q	901	87-A30-176-010	0E	TR,2SC1573A P/Q/R	A.....
Q	903	87-A30-176-010	0E	TR,2SC1573A P/Q/R	A.....
Q	904	89-320-012-080	0E	TR,2SC2001L	A.....
R	905	87-A00-165-090	0E	RES,M/F 15K-2W J RSF(S)	A.....
R	904	87-A00-165-090	0E	RES,M/F 15K-2W J RSF(S)	A.....
R	906	87-A00-165-090	0E	RES,M/F 15K-2W J RSF(S)	A.....
S	901	8Z-JB4-670-010		SOCKET,CRT 9P CVT3327 1603	A.....
		87-067-579-010	0E	TAPPING SCREW, BVT2+3-8	A.....
BT	601	87-JBG-626-010	1A	CONN ASSY,4P V WHT TV-NK	A.....
C	504	87-016-633-080	0E	CAP,E 1-50 SSL	A.....
C	503	87-016-633-080	0E	CAP,E 1-50 SSL	A.....
C	508	87-A10-469-080	0E	CAP,CER 2200P-500 K B DD10	A.....
C	502	87-A10-831-080	0E	CAP,E 1000-25 M SMG	A.....
C	501	88-708-980-810	0E	CAP,M 0.056-100 J AMZV	A.....
C	511	87-016-591-080	0E	CAP,E 100-35 SSL	A.....
C	512	87-018-127-080	0E	CAP, CER 470P-50V	A.....
C	510	87-018-131-080	0E	CAP, CER 1000P-50V	A.....
C	604	87-010-396-080	1A	CAP,E 470-35 SME	A.....
C	603	87-010-974-080	0E	CAP,CER 220P-500 B	A.....
C	609	87-016-482-010	1A	CAP,PP 6800P-1.6K J DKR	A.....
C	605	87-016-587-080	0E	CAP,E 1000-25 SSL	A.....
C	601	87-016-599-080	1A	CAP,E 10-250 SSL	A.....
C	607	87-A11-320-090		CAP,E 47-160 M 105 YXA	A.....
C	606	8Z-JBH-625-010		CAP,M/P 0.39-250 J A TYPE	A.....
C	610	87-010-974-080	0E	CAP,CER 220P-500 B	A.....
C	611	87-010-974-080	0E	CAP,CER 220P-500 B	A.....
C	614	87-010-974-080	0E	CAP,CER 220P-500 B	A.....
C	615	87-016-215-080	0E	CAP,E 1-160 M TWSS	A.....
C	612	87-016-624-080	0E	CAP,E 10-16 SSL	A.....
C	613	87-016-634-080	0E	CAP,E 2.2-50 SSL	A.....
CN	601	87-A60-933-010		CONN,4P V B04(5-3)B-DVS-L	A.....
D	501	87-070-274-080	0E	DIODE,1N4003 SEM	A.....
D	607	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	609	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	605	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	606	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....

ELECTRICAL MAIN PARTS LIST - 4/4

D	604	87-070-274-080	0E	DIODE,1N4003 SEM	A.....
D	601	87-A40-286-080	0E	DIODE,RGP10JE-5025	A.....
D	603	87-A40-286-080	0E	DIODE,RGP10JE-5025	A.....
D	602	87-A40-824-090		DIODE,RU3LFB4	A.....
D	610	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	611	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
D	613	87-A40-286-080	0E	DIODE,RGP10JE-5025	A.....
D	612	87-A40-444-080		ZENER,MTZJ20B	A.....
FR	604	87-A00-050-060	0E	RES,FUSE 2.2-1W J R-TYPE	A.....
FR	603	87-A00-056-060	0E	RES,FUSE 1.5-2WJ R-TYPE	A.....
FR	601	87-A00-063-060	0E	RES,FUSE 2.2-1/2W J R-TYPE	A.....
FR	602	87-A00-479-090		RES,FUSE 2.7-1W J	A.....
FR	605	87-A00-650-090		RES,FUSE 2.2K-1W J RF1S	A.....
IC	501	87-070-237-010	1C	IC,LA7832	A.....
L	602	87-A50-040-010	1A	COIL,2.2MH	A.....
L	604	8Z-JBH-619-010		COIL,CHOKE-ELC10D331E	A.....
Q	501	89-327-854-080	0E	TR,2SC2785F	A.....
Q	602	87-A30-176-010	0E	TR,2SC1573A P/Q/R	A.....
Q	601	89-418-771-060	1E	TR,2SD1877	A.....
R	606	8Z-JBH-628-080		RES,M/F 0.47-1/2W K ERX 12SJ	A.....
R	611	87-A00-123-090	0E	RES,M/F 3.9K-2W J RSI-2S B	A.....
R	610	87-A00-561-090		RES,M/F 4.7K-2W J ERGS	A.....
R	624	87-A00-668-090		RES,FUSE 180-2W J RF2S	A.....
T	601	8Z-JBH-604-010		FBT,US MSX VR0013A	A.....
T	603	8Z-JBH-612-010		FLTR,PULSE ELF15N005A	A.....
T	602	8Z-JBH-615-010		TRANS,US ETH09K10AZ	A.....
		8Z-JBH-636-010		F-BEAD,2.7-5.5-4 FSOB060	A.....
		87-A90-332-010	0E	HLDR,SF-2001 HV CABLE	A.....
BT	401	8Z-JBH-631-010		CONN ASSY,4P V WHT SP-14	A.....
BT	801	8Z-JBH-618-010		AC CORD,US BLK	A.....
BT	903	84-LB3-693-210	1D	CONN ASSY,1P CRT GND	A.....
CNA	601	8Z-JBH-637-010		CONN ASSY,5P V W VDY-320-US
F	801	87-035-489-010	1A	FUSE,4A125V D UL	A.....
L	810	8Z-JBH-609-010		DGC,14'US	A.....
SP	402	87-A91-412-010		SPKR,F 4*10 8OHM 5W S0410J06	A.....
SP	401	87-A91-412-010		SPKR,F 4*10 8OHM 5W S0410J06	A.....
V	901	8Z-JBG-601-010		CRT,A34JFQ90X32 (VW)	A.....
V	901	8Z-JBH-603-010		CRT,A34JFQ90X29 (VW)

MECHANICAL PARTS LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.


NHST1L	XX	A
		KANRI			
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX	
	8Z-JBE-009-010		PLATE,JACK UL	A
	86-LB6-010-210	1B	PANEL,REAR	A
	86-LB6-019-010	2Y	CABI,REAR EX	A
	87-054-087-010	1A	BADGE,AIWA 40	A
	8Z-JB2-006-010		PANEL,REAR UA	
	8Z-JBH-001-010		CABI,FR ASSY S1311	
	8Z-JBH-005-010		CABI,REAR UL	
	8Z-JBH-012-010		CABI,FR ASSY AS145	A
	84-LB3-205-010	0E	SPR-E,EARTH	A
	86-LBU-201-010	0E	HLDR,AC CORD	A
	8Z-JBH-201-010		HLDR,FBT ST	A
	87-067-680-010	0E	BVI T3+3-10	A
	87-067-690-010	0E	TAPPING SCREW, BVIT3+3-12	A
	87-067-758-010	0E	BVT2+3-12 W/O SLOT	A
	87-067-761-010	0E	TAPPING SCREW, BVT2+3-10	A
	87-067-844-010	0E	BVT2+4-16 BLK	A
	87-078-203-110	0E	S-SCREW,W5-25	A
	87-067-680-010	0E	BVI T3+3-10	A
	87-067-579-010	0E	TAPPING SCREW, BVT2+3-8	A
	84-LB3-216-010	0E	HLDR,LED	A
	87-067-579-010	0E	TAPPING SCREW, BVT2+3-8	A
	8Z-JBH-636-010		F-BEAD,2.7-5.5-4 FSOB060	A
	87-A90-332-010	0E	HLDR,SF-2001 HV CABLE	A

ACCESSORIES / PACKAGE LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.

NHST1L	XX.....	A.....
		KANRI	
REF.NO	PARTS NO.	NO.	DESCRIPTION SUFFIX
	8Z-JBF-903-010		IB,NH (E/CH) -AS205/145 A.....
	8Z-JBE-910-010		IB,U (ESF) S2011/1311 -NEW
	87-A90-702-010	1H	ANT ASSY,TV 5 SEC (NTSC) A.....
	8Z-JBE-953-010		RC UNIT,RC-ZVT09 A.....

SCHEMATIC DIAGRAM – 1 (MAIN / NK)

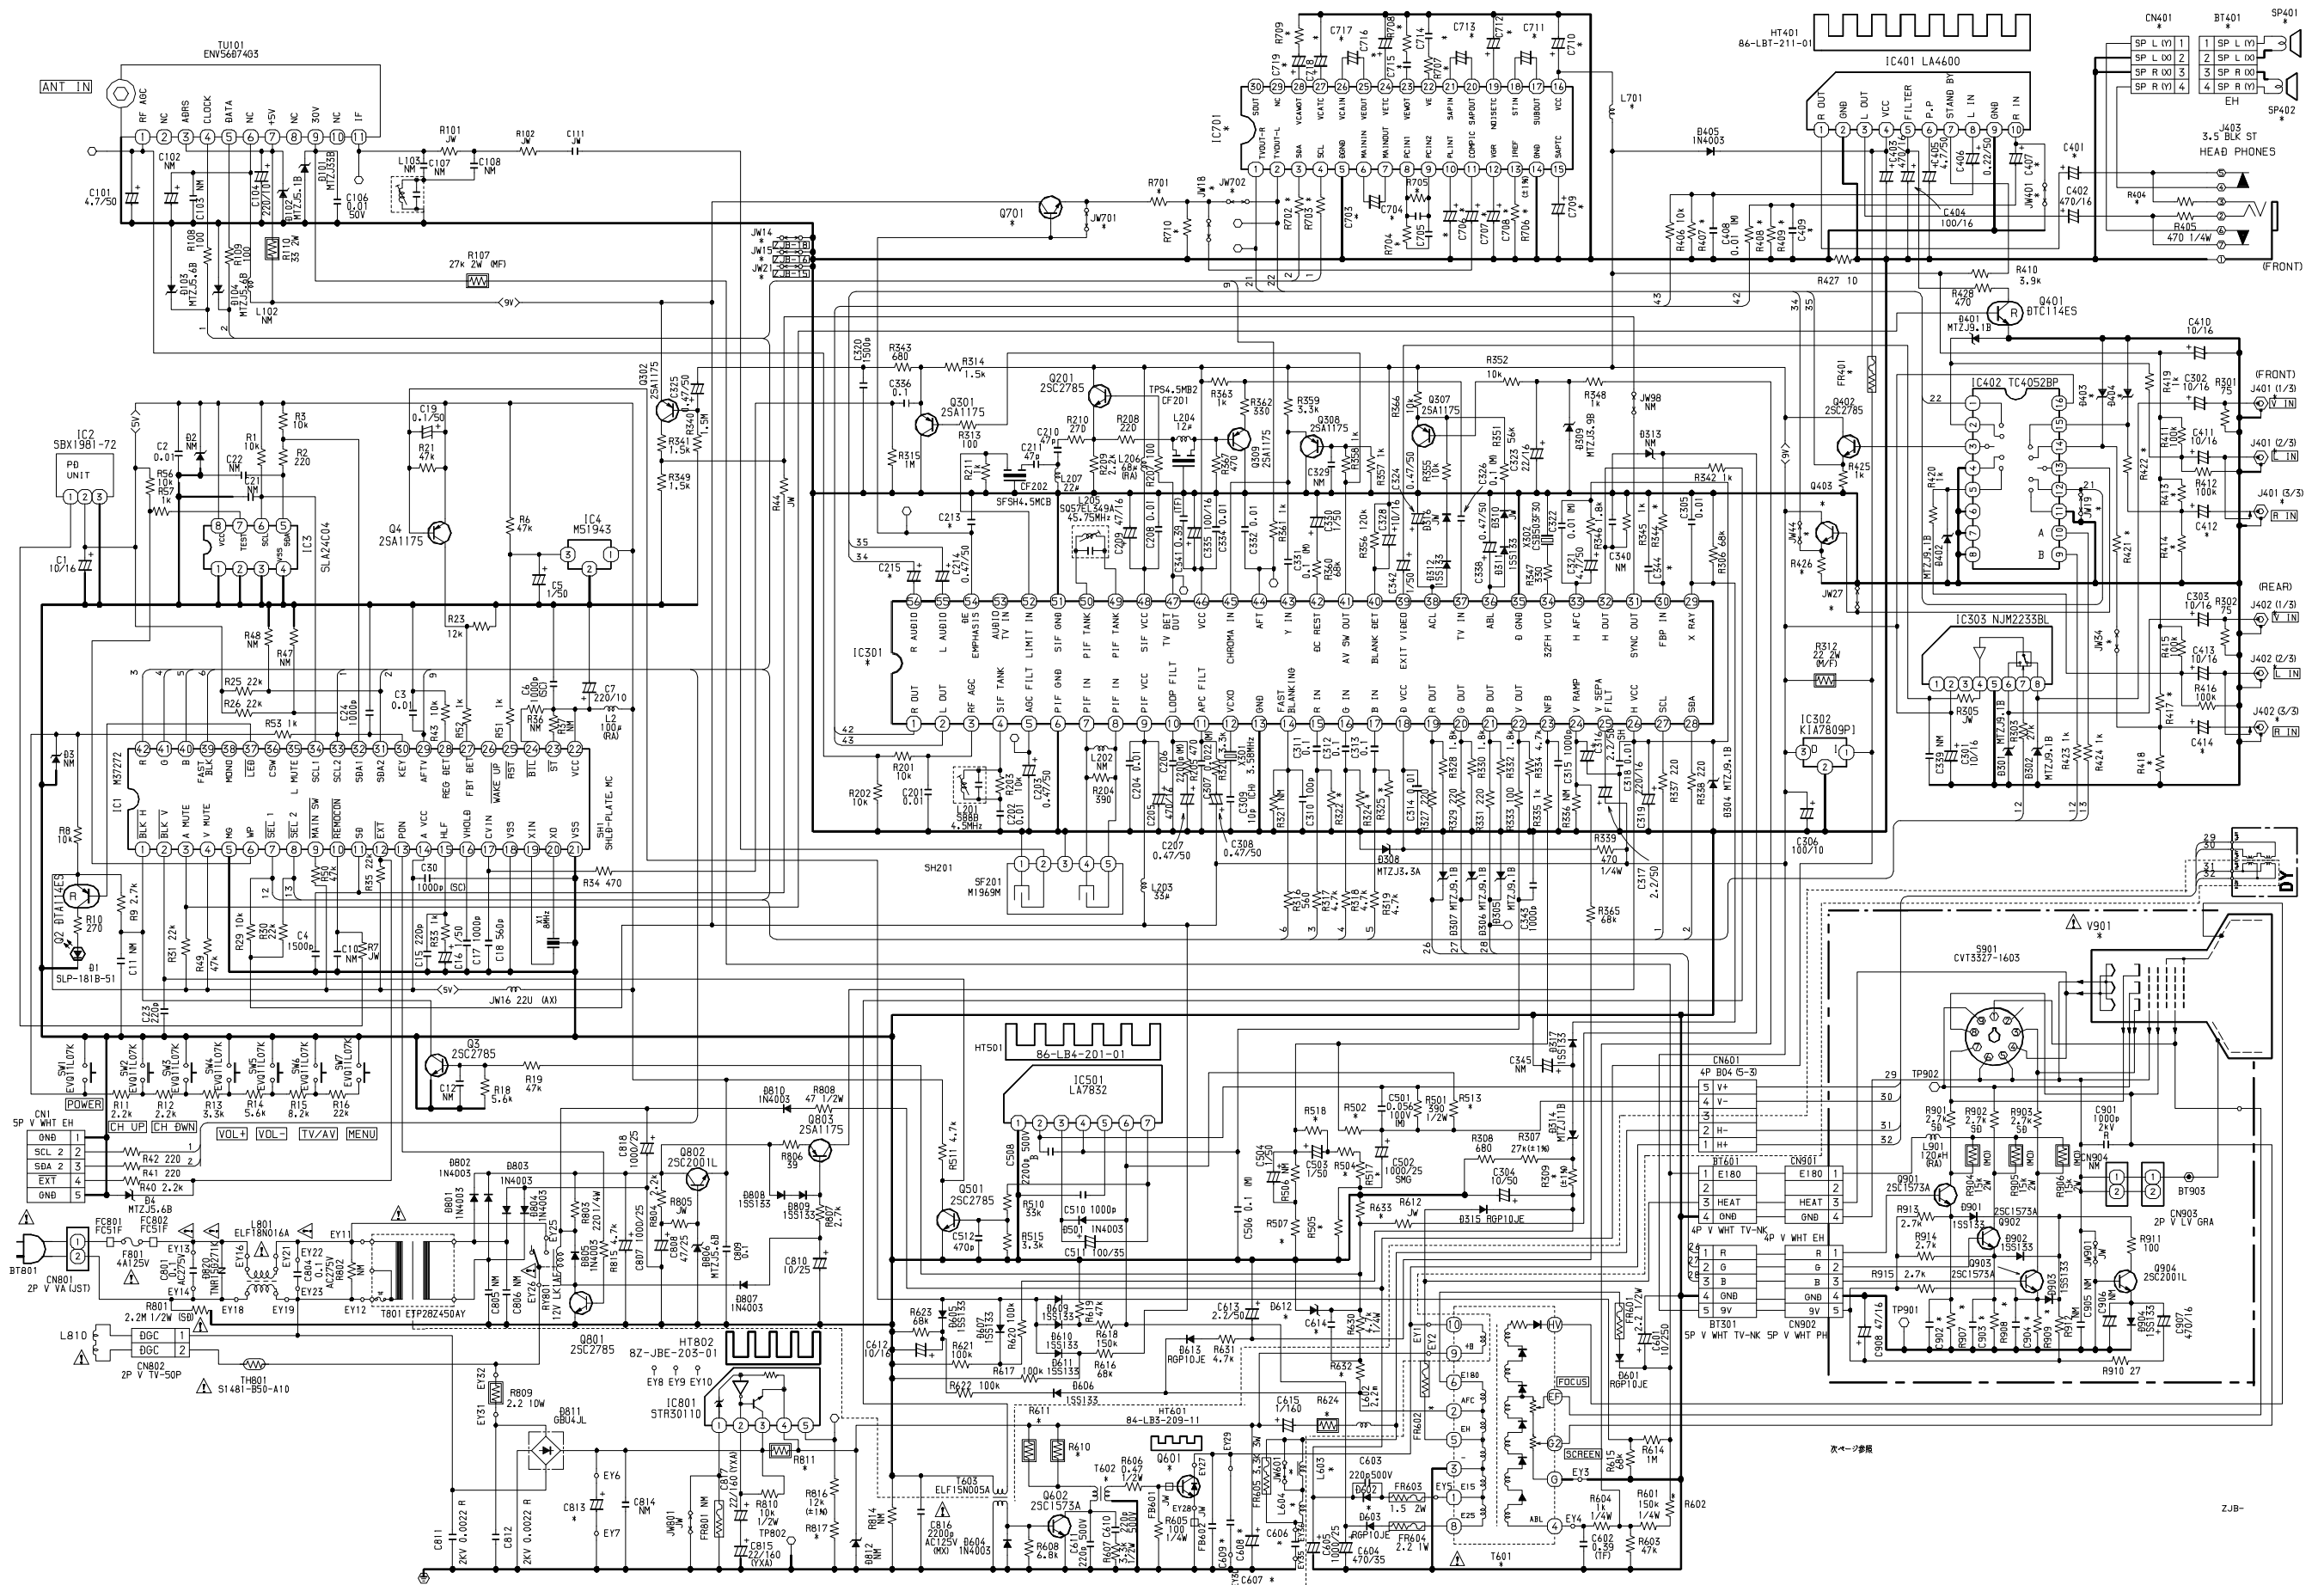

アイワ株式会社 〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 (代表)
AIWA CO.,LTD. 2-11, IKENOHATA 1-CHOME, TAITO-KU, TOKYO 110, JAPAN TEL:03 (3827) 3111