

PARTS LIST

[XV-N30BK,XV-N33SL]

* All printed circuit boards and its assemblies are not available as service parts.

* (x_) in a description column shows the number of the used part.

Area Suffix (XV-N30BK)

J ----- U.S.A.
 C ----- Canada
 UJ ----- U.S.A Military
 B ----- U.K.
 E ----- Continental Europe
 EN ----- Northern Europe
 EV ----- Eastern Europe
 EE ----- Russian Federation


Area Suffix (XV-N33SL)

J ----- U.S.A.
 C ----- Canada
 UJ ----- U.S.A Military
 B ----- U.K.
 E ----- Continental Europe
 EN ----- Northern Europe
 EV ----- Eastern Europe
 EE ----- Russian Federation
 US ----- Singapore
 UG - Turkey, South Africa, Egypt
 UX ----- Saudi Arabia
 UP ----- Korea
 UF ----- China
 UB ----- Hong Kong
 A ----- Australia
 UW ----- Brazil, Mexico, Peru
 UY ----- Argentina

- Contents -

Exploded view of general assembly and parts list	3-2
DVD Traverse mechanism assembly and parts list	3-4
DVD Loading mechanism assembly and parts list	3-6
Electrical parts list	3-8
Packing materials and accessories parts list	3-14

EXPLODED VIEW OF GENERAL ASSEMBLY AND PARTS LIST

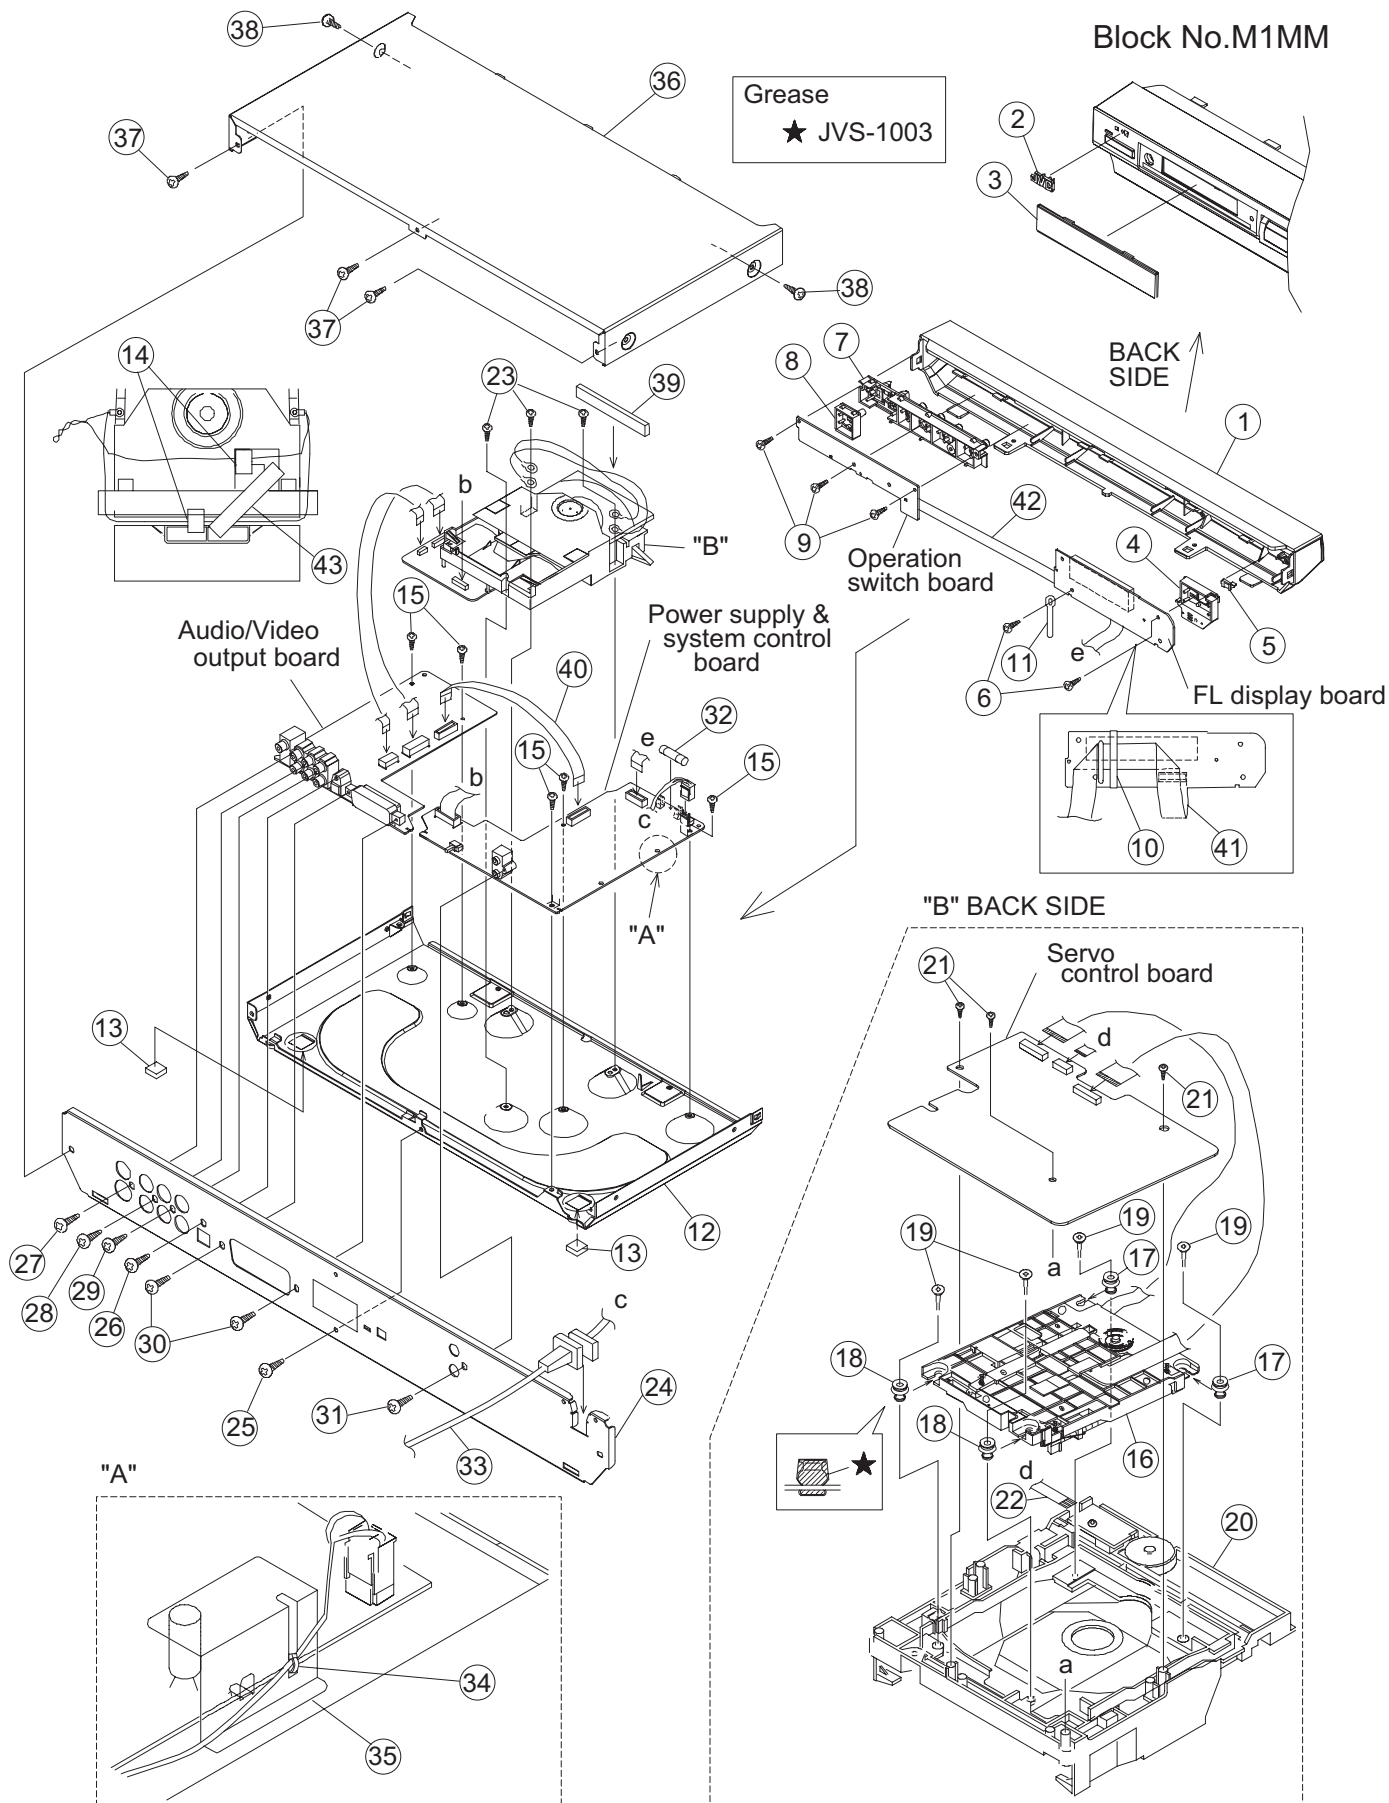

GENERAL ASSEMBLY

Block No. [M][1][M][M]

△ Symbol No.	Part No.	Part Name	Description	Local
1	GN10037-009A	FRONT PANEL		14,15,16,17,18
1	GN10037-008A	FRONT PANEL		12,13,19,20,21,22,23,24,25
1	GN10037-004A	FRONT PANEL		1,2,3
1	GN10037-003A	FRONT PANEL		4,5,6,7,8
1	GN10037-010A	FRONT PANEL		10,11,9
2	GN40020-001A	JVC MARK		only XV-N30BK
2	GN40020-002A	JVC MARK		only XV-N33SL
3	GN20041-001A	WINDOW SCREEN		
4	GN20040-001A	PUSH BUTTON	POWER	only XV-N30BK
4	GN20040-002A	PUSH BUTTON	POWER	only XV-N33SL
5	GN30049-001A	INDICATOR		
6	QYSDSF2608Z	SCREW	2.6mm x 8mm(x2)	
7	GN20043-001A	PUSH BUTTON	PLAY	only XV-N30BK
7	GN20043-002A	PUSH BUTTON	PLAY	only XV-N33SL
8	GN20044-002A	PUSH BUTTON	SEARCH	
9	QYSDSF2608Z	SCREW	PLAY SW.CB.(x3)	
10	GN30006-012A	SPACER		
11	VKZ4001-110	WIRE HOLDER		
12	GN10038-002A	CHASSIS BASE		only XV-N30BK
12	GN10038-001A	CHASSIS BASE		only XV-N33SL
13	E75896-002	FELT SPACER	(x2)	
14	LE30001-031A	SPACER		
15	QYSBSG3008Z	TAPPING SCREW	MAIN CB+CHASSIS(x5)	
16	-----	TRAVERSE MECHANISM		
17	LE40900-001A	INSULATOR	(x2)	
18	LE40900-002A	INSULATOR	(x2)	
19	LE40901-001A	SPECIAL SCREW	FOR INSULATOR(x4)	
20	-----	LOADING MECHANISM		
21	QYSDSF2608Z	SCREW	FOR CLAMPER BAS(x3)	
22	QUQ210-0518BJ	FFC WIRE		3
22	QUQ210-0516BJ	FFC WIRE		except XV-N30BK for ver.UJ
23	QYSBSG3008Z	TAPPING SCREW	MECHA+CHASSIS(x3)	
24	GN20047-047A	REAR PANEL		11
24	GN20047-042A	REAR PANEL		12,13
24	GN20047-027A	REAR PANEL		14,15,16,17
24	GN20047-028A	REAR PANEL		18
24	GN20047-002A	REAR PANEL		1,2
24	GN20047-036A	REAR PANEL		20
24	GN20047-031A	REAR PANEL		21
24	GN20047-032A	REAR PANEL		22
24	GN20047-033A	REAR PANEL		23
24	GN20047-034A	REAR PANEL		24
24	GN20047-029A	REAR PANEL		19,25
24	GN20047-043A	REAR PANEL		3
24	GN20047-005A	REAR PANEL		4,5,6,7
24	GN20047-006A	REAR PANEL		8
24	GN20047-025A	REAR PANEL		10,9
25	QYSBSGY3008M	SPECIAL SCREW	REAR+CHASSIS	
26	QYSBSGY3008M	SPECIAL SCREW	OPT OUT	except Europe
27	QYSBSGY3008M	SPECIAL SCREW	COAXIAL	
28	QYSBSGY3008M	SPECIAL SCREW	AUDIO OUT	
29	QYSBSGY3008M	SPECIAL SCREW	VIDEO OUT	
30	QYSBSGY3008M	SPECIAL SCREW	21P OUT(x2)	14,15,16,17,18,4,5,6,7,8
31	QYSBSGY3008M	SPECIAL SCREW	COMPU LINK	except ver.J,C
△ 32	QMF51E2-1R6-J1	FUSE	1.6A AC250V	except ver.J,C
△ 32	QMF51U1-1R6-J8	FUSE	1.6A AC125V	only ver.J,C
△ 33	QMPR440-200-JD	POWER CORD	2m BLACK	13
△ 33	QMPR430-200-JD	POWER CORD	2m BLACK	21
△ 33	QMPR460-200-JD	POWER CORD	2m BLACK	22
△ 33	QMPG100-244-JD	POWER CORD(AST)	2.44m BLACK	23
△ 33	QMPR470-200-JN	POWER CORD	2m BLACK	24
△ 33	QMPN220-200-JD	POWER CORD(EK)	2m BLACK	14,25,4
△ 33	QMPK280-200-JN	POWER CORD(EU)	2m BLACK	11,12,15,16,17,18,19,20,3,5,6,7,8
△ 33	QMPD450-200-JN	POWER CORD(US/CA)	2m BLACK	only ver.J,C
34	QZW0004-001	WIRE CLAMP		
35	GN30071-001A	PROTECT SHEET		except ver.J,C
36	GN20046-001A/S/	METAL COVER		only XV-N30BK
36	GN20046-002A/S/	METAL COVER		only XV-N33SL
37	QYSBSGG3008E	TAPPING SCREW	METAL REAR(x3)	
38	QYSDSG3008M	SCREW	METAL SIDE(x2)	1,2,4,5,6,7,8
38	QYSDSG3008N	TAPPING SCREW	METAL SIDE(x2)	only XV-N33SL and XV-N30BK for ver.UJ
39	GN20042-001A	FITTING		only XV-N30BK
39	GN20042-003A	FITTING		only XV-N33SL
40	QUQ210-1924BJ	FFC WIRE		3
40	QUQ210-1923BJ	FFC WIRE		except XV-N30BK for ver.UJ
41	QUQ412-1420BJ	FFC WIRE		3
41	QUQ412-1417BJ	FFC WIRE		except XV-N30BK for ver.UJ
42	QUQ412-0817AJ	FFC WIRE		
43	GN30006-012A	SPACER		only ver.J,C

<Local area>


XV-N30BK 1:J 2:C 3:UJ 4:B 5:E 6:EN 7:EV 8:EE

XV-N33SL 9:J 10:C 11:UJ 12:UW 13:UY 14:B 15:E 16:EN 17:EV 18:EE 19:US 20:UG 21:UX 22:UP 23:A 24:UF 25:UB

(No.A0039)3-3

DVD TRAVERSE MECHANISM ASSEMBLY AND PARTS LIST

EXL-V76-1C Block No.M2MM

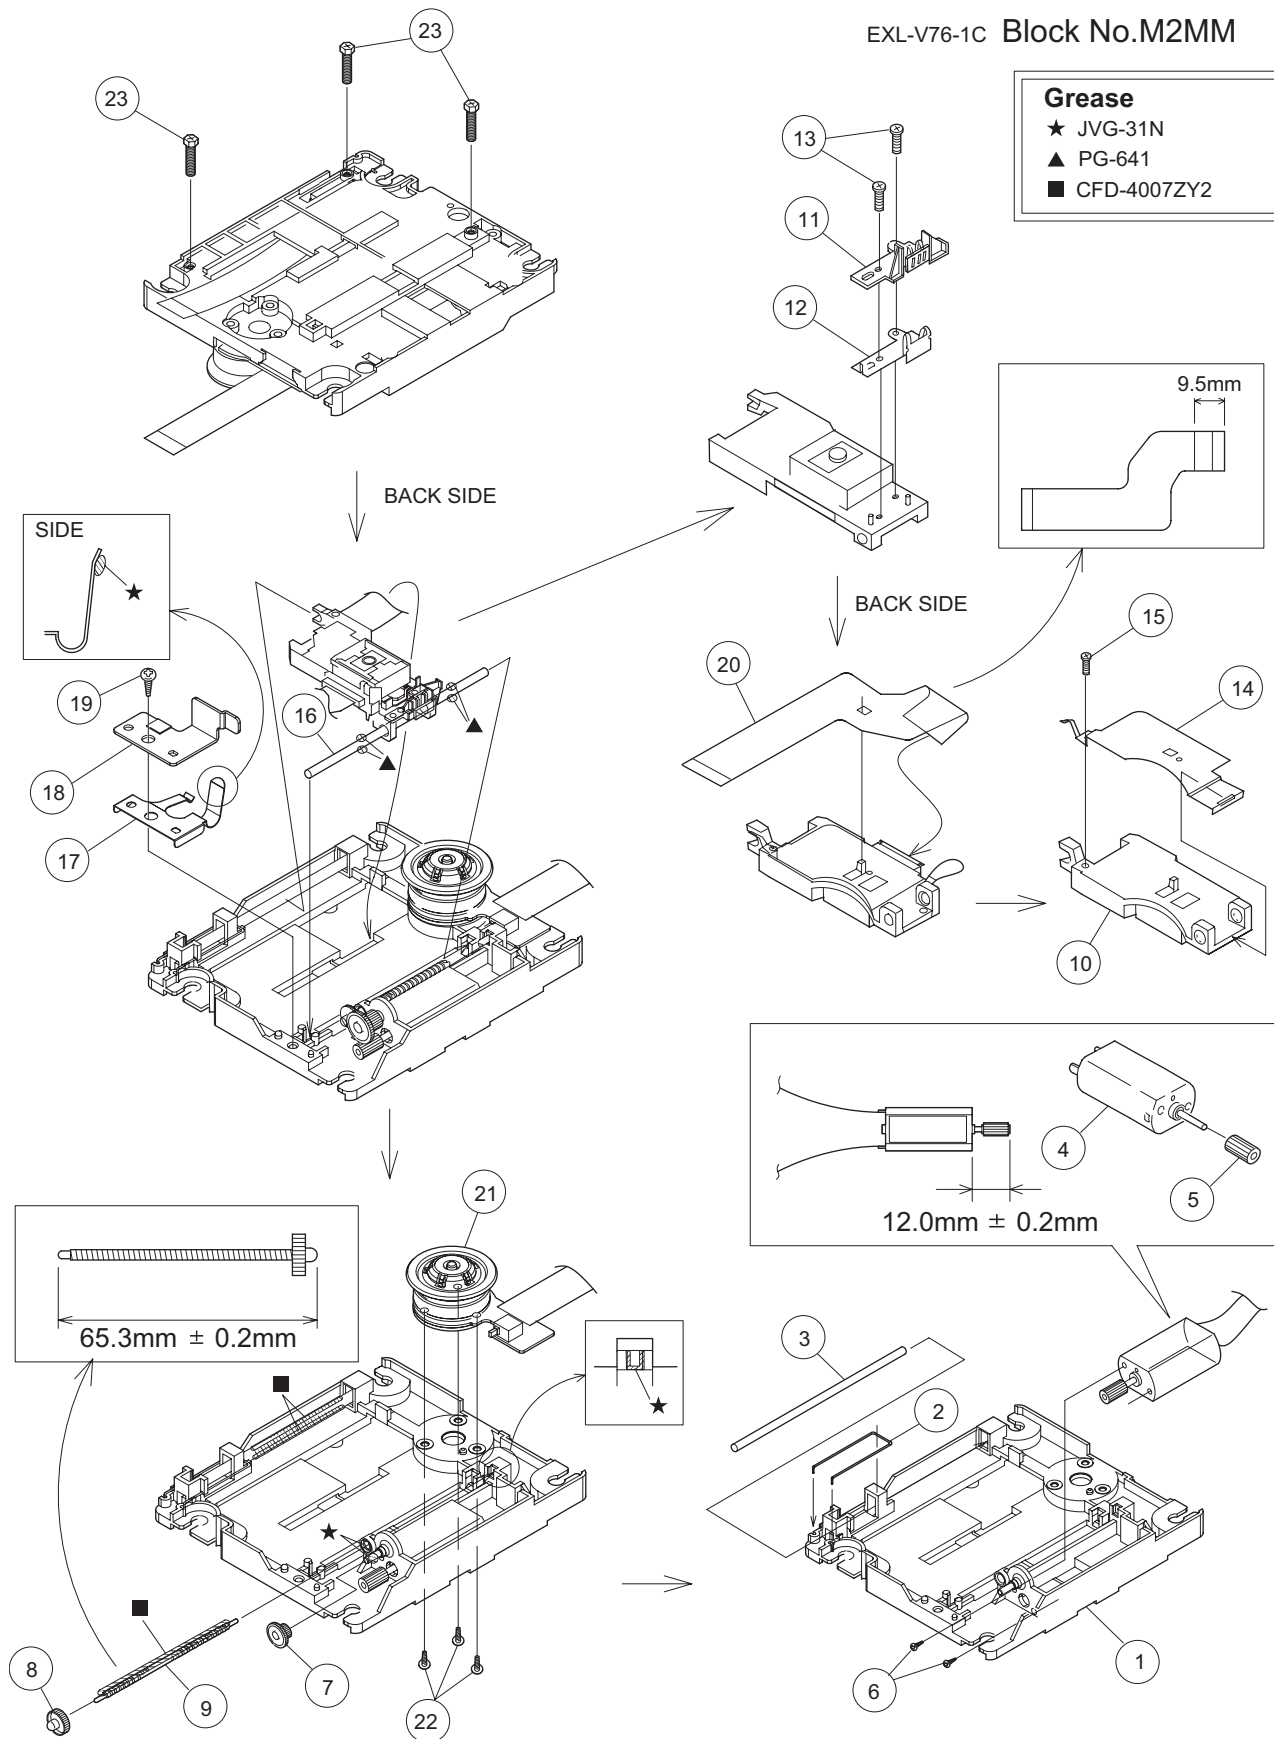


DVD TRAVERSE MECHANISM

Block No. [M][2][M][M]

△ Symbol No.	Part No.	Part Name	Description	Local
1	LE10274-003A	MECHA BASE		
2	LE40896-001A	BAR SPRING		
3	LV41121-002A	SHAFT		
4	QAR0165-001	FEED MOTOR		
5	LV41510-001A	FEED GEAR T		
6	QYSPSPU2040M	SCREW	2mm x 4mm(x2)	
7	LV41511-003A	FEED GEAR M		
8	LV41512-002A	FEED GEAR E		
9	LV41517-003A	LEAD SCREW		
9	LE40918-001A	LEAD SCREW		
10	QAL0452-001	PICK UP		
11	LE20519-001A	SW ACTUATOR		
12	LE30886-001A	LEAD SPRING		
13	QYSPSFU1740Z	SCREW	1.7mm x 4mm(x2)	
14	LE30888-003A	P.U.SPRING		
15	QYSPSGU1430Z	SCREW	1.4mm x 3mm	
16	LV41121-002A	SHAFT		
17	LE40894-001A	T.SPRING		
18	LE40895-002A	BRACKET		
19	QYDSF2005Z	SCREW	2mm x 5mm	
20	QAL0284-001	FPC		
21	QAR0268-001	SPINDLE MOTOR		
22	QYSPSPU1760Z	SCREW	1.7mm x 6mm(x3)	
23	LE40858-002A	S.SCREW	(x3)	

DVD LOADING MECHANISM ASSEMBLY AND PARTS LIST

ELM-J3-1C Block No.M3MM

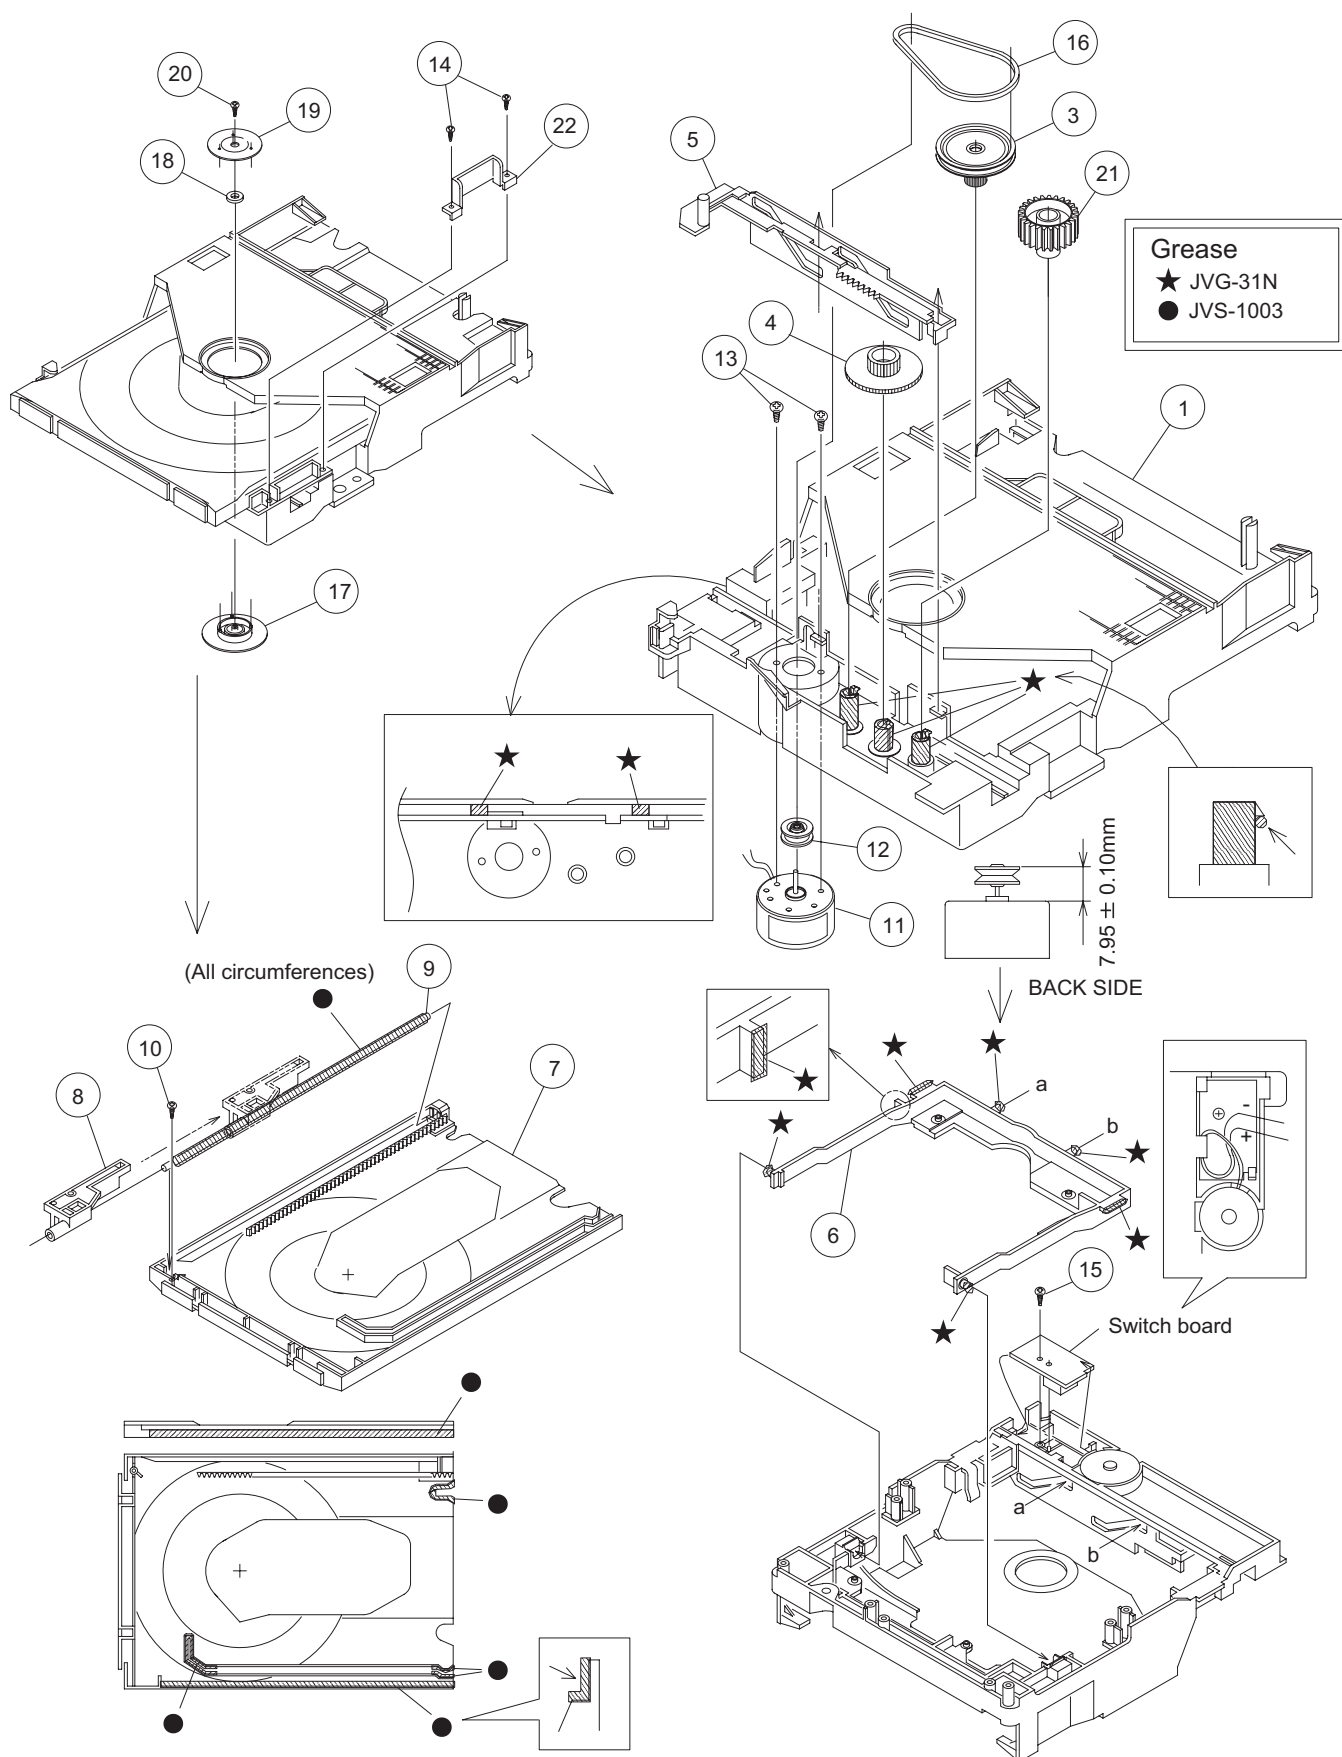

DVD LOADING MECHANISM

Block No. [M][3][M][M]

△ Symbol No.	Part No.	Part Name	Description	Local
1	LE10275-003A	LOADER BASE		
3	LE31043-001A	PULLEY GEAR		
4	LE31042-001A	MIDDLE GEAR		
5	LE20665-001A	SLIDE CAM		
6	LE20667-001A	ELEVATOR		
7	LE10276-002A	TRAY		
8	LE31045-001A	BUSHING		
9	LE40898-001A	SHAFT		
10	QYSSSF2008Z	SCREW	2mm x 8mm	
11	QAR0197-001	MOTOR		
12	LV42087-002A	MOTOR PULLEY		
13	QYSPSPU1730Z	SCREW	FOR MOTOR(x2)	
14	QYSDSF2008Z	SCREW	2mm x 8mm(x2)	
15	QYSDSF2006Z	SCREW	FOR BOARD	
16	LE40897-001A	BELT		
17	LE31046-001A	CLAMPER		
18	LV42930-003A	MAGNET		
19	LE40899-001A	YOKE		
20	LE40906-001A	S.SCREW		
21	LE31044-001A	IDLE GEAR		
22	LE40937-001A	LEAF SPRING		

ELECTRICAL PARTS LIST
SERVO CONTROL BOARD

Block No. [0][1][0][0]					△ Symbol No.	Part No.	Part Name	Description	Local
△ Symbol No.	Part No.	Part Name	Description	Local					
IC101	AN8708FHK	IC			C260	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
IC201	BA5983FM-X	IC			C261	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
IC251	BA6664FM-X	LSI			C262	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
IC301	MN103S26EGB-H	IC			C263	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
IC402	AK4381VT-X	IC			C264	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
IC501	JCE8044	IC			C301	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
IC501	NDV8602VWA/0154	C CAPACITOR	#NCVpF 2		C302	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
IC505	HY57V643220CT-5	IC			C303	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
IC509	SST39VF160H0626	IC		only ver.J,C	C304	NEA70GM-476X	E CAPACITOR	47uF 4V M	
IC509	SST39VF160H0633	IC		3,11	C306	NEA70GM-476X	E CAPACITOR	47uF 4V M	
IC509	SST39VF160H06A3	IC		23	C308	NEA70GM-476X	E CAPACITOR	47uF 4V M	
IC509	SST39VF160H0653	IC		only	C310	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
IC509	SST39VF160H06C3	IC		ver.B,E,EN,EV	C311	NCB31HK-561X	C CAPACITOR	560pF 50V K	
IC509	* Part number will be described in MCI			only ver.EE	C312	NCB31HK-561X	C CAPACITOR	560pF 50V K	
IC511	LM1117MP1.8-X	IC		12,13,19,20,	C313	NCB31HK-561X	C CAPACITOR	560pF 50V K	
IC512	74LCX373MTC-X	IC(DIGITAL)		21,22,24,25	C314	NCB31HK-331X	C CAPACITOR	330pF 50V K	
IC513	74LCX373MTC-X	IC(DIGITAL)			C315	NCB31HK-471X	C CAPACITOR	470pF 50V K	
Q101	2SB1424/QR-W	TRANSISTOR			C316	NCB31HK-271X	C CAPACITOR	270pF 50V K	
Q102	2SB1424/QR-W	TRANSISTOR			C317	NCS31HJ-121X	C CAPACITOR	120pF 50V J	
Q103	DTA144EE-X	DIGI TRANSISTOR			C318	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
D101	RB521S-30-X	SB DIODE			C319	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
D301	RB521S-30-X	SB DIODE			C320	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C105	NEA70JM-476X	E CAPACITOR	47uF 6.3V M		C321	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C106	NEA70JM-476X	E CAPACITOR	47uF 6.3V M		C322	NCB31HK-562X	C CAPACITOR	5600pF 50V K	
C110	NCS31HJ-101X	C CAPACITOR	100pF 50V J		C323	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C111	NCB31HK-472X	C CAPACITOR	4700pF 50V K		C324	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C112	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C325	NCS31HJ-470X	C CAPACITOR	47pF 50V J	
C115	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C326	NCB31CK-183X	C CAPACITOR	0.018uF 16V K	
C116	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C327	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
C119	NCB31HK-561X	C CAPACITOR	560pF 50V K		C328	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C121	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C329	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C124	NCB31HK-222X	C CAPACITOR	2200pF 50V K		C330	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C125	NCB31HK-391X	C CAPACITOR	390pF 50V K		C331	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C126	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C332	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C127	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C333	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C128	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C334	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C130	NCB31HK-102X	C CAPACITOR	1000pF 50V K		C335	NCB31HK-681X	C CAPACITOR	680pF 50V K	
C131	NCB31HK-102X	C CAPACITOR	1000pF 50V K		C337	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C132	NCB31HK-102X	C CAPACITOR	1000pF 50V K		C338	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C133	NCB31HK-102X	C CAPACITOR	1000pF 50V K		C339	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C134	NCB21CK-224X	C CAPACITOR	0.22uF 16V K		C340	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C135	NEA70JM-476X	E CAPACITOR	47uF 6.3V M		C341	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C136	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C342	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C
C137	NEA70GM-476X	E CAPACITOR	47uF 4V M		C343	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C138	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C344	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C
C140	NCB31HK-102X	C CAPACITOR	1000pF 50V K		C345	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C141	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C346	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C142	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C347	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C143	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C348	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C144	NCB31CK-103X	C CAPACITOR	0.01uF 16V K		C349	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C146	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C350	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C204	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C351	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C
C205	NCS31HJ-121X	C CAPACITOR	120pF 50V J		C360	NEA70GM-476X	E CAPACITOR	47uF 4V M	
C207	NCB31HK-391X	C CAPACITOR	390pF 50V K		C366	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M	only ver.J,C
C208	NCB31HK-391X	C CAPACITOR	390pF 50V K		C407	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C211	NCB31HK-223X	C CAPACITOR	0.022uF 50V K		C408	NEA70JM-227X	E CAPACITOR	220uF 6.3V M	
C212	NCB31CK-103X	C CAPACITOR	0.01uF 16V K		C409	NEA70JM-227X	E CAPACITOR	220uF 6.3V M	
C216	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C501	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C217	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C502	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C218	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		C503	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C251	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C504	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C253	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C505	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C255	NCB31CK-153X	C CAPACITOR	0.015uF 16V K		C506	NDC31HJ-150X	C CAPACITOR	15pF 50V J	
C256	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		C507	NDC31HJ-180X	C CAPACITOR	18pF 50V J	
C257	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C508	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C258	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C509	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
C259	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		C510	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
					C512	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
					C514	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C
					C515	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C
					C516	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C
					C517	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
					C518	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
					C519	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C520	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C	R214	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C521	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R215	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C523	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R216	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J	
C524	NEA70GM-476X	E CAPACITOR	47uF 4V M		R219	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
C527	NEA70GM-476X	E CAPACITOR	47uF 4V M		R220	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
C528	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C	R221	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C529	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C	R222	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C531	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R223	NRSA63J-912X	MG RESISTOR	9.1kΩ 1/16W J	
C532	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R230	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
C533	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R251	NRS125J-R47X	MG RESISTOR	0.47Ω 1/2W J	
C534	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R252	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J	
C535	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C	R254	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	
C536	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C	R255	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C539	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C	R256	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
C540	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R259	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C541	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R280	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
C542	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R301	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C543	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R302	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C544	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R303	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C545	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R304	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C547	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C	R305	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C548	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R306	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C549	NEA70GM-476X	E CAPACITOR	47uF 4V M		R307	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C550	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R308	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C551	NCB31CK-103X	C CAPACITOR	0.01uF 16V K		R309	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C552	NCB31HK-101X	C CAPACITOR	100pF 50V K	only ver.J,C	R313	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C553	NCB31HK-101X	C CAPACITOR	100pF 50V K	only ver.J,C	R317	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C554	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R320	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
C555	NCB31HK-101X	C CAPACITOR	100pF 50V K	only ver.J,C	R321	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C556	NCB31HK-101X	C CAPACITOR	100pF 50V K	only ver.J,C	R323	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C557	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R324	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C558	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R325	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
C559	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C	R326	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C560	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C	R327	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
C561	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C	R328	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
C562	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R329	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C563	NCB31HK-121X	C CAPACITOR	120pF 50V K	only ver.J,C	R330	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C565	NEA70GM-476X	E CAPACITOR	47uF 4V M		R331	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C566	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R332	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C567	NCB31HK-331X	C CAPACITOR	330pF 50V K	only ver.J,C	R333	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J	
C568	NCB31HK-331X	C CAPACITOR	330pF 50V K	only ver.J,C	R334	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C569	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R335	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
C571	NEA70GM-476X	E CAPACITOR	47uF 4V M		R336	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
C572	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R337	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	
C573	NEA70GM-476X	E CAPACITOR	47uF 4V M		R338	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
C578	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z		R339	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
C581	NEA70GM-227X	E CAPACITOR	220uF 4V M		R340	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
					R341	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R101	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J		R342	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R102	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R343	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R103	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R344	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R104	NRS125J-270X	MG RESISTOR	27Ω 1/2W J		R403	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R105	NRS125J-270X	MG RESISTOR	27Ω 1/2W J		R404	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	
R106	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J		R501	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R107	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J		R509	NCB31HK-101X	C CAPACITOR	100pF 50V K	only ver.J,C
R108	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J		R510	NCB31HK-101X	C CAPACITOR	100pF 50V K	only ver.J,C
R110	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J		R511	NCB31HK-101X	C CAPACITOR	100pF 50V K	only ver.J,C
R111	NRVA63D-123X	CMF RESISTOR	12kΩ 1/16W D		R513	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R112	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J		R514	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	
R113	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R515	NRSA63J-331X	MG RESISTOR	33Ω 1/16W J	
R119	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J		R519	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R120	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J		R520	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R121	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		R521	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	except ver.J,C
R125	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J		R521	NQR0129-004X	FERRITE BEADS		only ver.J,C
R128	NRS125J-1R0X	MG RESISTOR	1Ω 1/2W J		R522	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	except ver.J,C
R129	NRS125J-1R0X	MG RESISTOR	1Ω 1/2W J		R522	NQR0129-004X	FERRITE BEADS		only ver.J,C
R201	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J		R523	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	except ver.J,C
R202	NRS125J-1R0X	MG RESISTOR	1Ω 1/2W J		R523	NQR0129-004X	FERRITE BEADS		only ver.J,C
R204	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J		R525	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R205	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J		R550	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R206	NRSA63J-303X	MG RESISTOR	30kΩ 1/16W J		R565	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	except ver.J,C
R207	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		R565	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	only ver.J,C
R208	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R566	NRVA63D-122X	CMF RESISTOR	1.2kΩ 1/16W D	
R209	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R567	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	except ver.J,C
R210	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J		R567	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	only ver.J,C
R211	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J		R568	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	except ver.J,C
R212	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R568	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	only ver.J,C
R213	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R569	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	except ver.J,C

<Local area>

XV-N30BK 1:J 2:C 3:UJ 4:B 5:E 6:EN 7:EV 8:EE

XV-N33SL 9:J 10:C 11:UJ 12:UW 13:UY 14:B 15:E 16:EN 17:EV 18:EE 19:US 20:UG 21:UX 22:UP 23:A 24:UF 25:UB

(No.A0039)3-9

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R569	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	only ver.J,C	D903	1F4-T2	FR DIODE		
R570	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J		D904	1SS244-T2	SI DIODE		
R572	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	except ver.J,C	△ D951	1F4-T2	FR DIODE		
R572	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	only ver.J,C	△ D952	1F4-T2	FR DIODE		
R573	NRSA63J-162X	MG RESISTOR	1.6kΩ 1/16W J		△ D953	UF304G-F82	FR DIOAE		
R574	NRSA63J-162X	MG RESISTOR	1.6kΩ 1/16W J		△ D954	1F4-T2	FR DIODE		
R575	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J		△ D955	PS154R-F83	FR DIODE		
R576	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J		△ D956	1F4-T2	FR DIODE		
R578	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J		△ D957	1F4-T2	FR DIODE		
R583	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J						
R584	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J		PC901	PC123Y22	MG.RES C.M		
R589	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J						
L501	NQL044K-100X	COIL	10uH K		C602	NCS31HJ-221X	C CAPACITOR	220pF 50V J	
CN101	QGF0522F1-30W	CONNECTOR	FFC/FPC (1-30)		C603	NCS31HJ-331X	C CAPACITOR	330pF 50V J	
CN201	QGF1038F1-15X	CONNECTOR	FFC/FPC (1-15)		C604	NCS31HJ-220X	C CAPACITOR	22pF 50V J	
CN202	QGF1038F1-05X	CONNECTOR	FFC/FPC (1-5)		C612	NCS31HJ-221X	C CAPACITOR	220pF 50V J	
CN501	QGB1231L2-15W	CONNECTOR	B-B (1-15)		C613	NCS31HJ-331X	C CAPACITOR	330pF 50V J	
CN502	QGB1231L2-15W	CONNECTOR	B-B (1-15)		C614	NCS31HJ-220X	C CAPACITOR	22pF 50V J	
CN503	QGB1231L2-09W	CONNECTOR	B-B (1-9)		C622	NCS31HJ-221X	C CAPACITOR	220pF 50V J	
K101	NQR0007-002X	FERRITE BEADS			C623	NCS31HJ-331X	C CAPACITOR	330pF 50V J	
K508	NQR0007-002X	FERRITE BEADS			C624	NCS31HJ-220X	C CAPACITOR	22pF 50V J	
K509	NQR0007-002X	FERRITE BEADS			C632	NCS31HJ-221X	C CAPACITOR	220pF 50V J	
K556	NQR0007-002X	FERRITE BEADS			C633	NCS31HJ-331X	C CAPACITOR	330pF 50V J	
K557	NQR0007-002X	FERRITE BEADS			C634	NCS31HJ-220X	C CAPACITOR	22pF 50V J	
K558	NQR0007-002X	FERRITE BEADS			C639	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
K559	NQR0007-002X	FERRITE BEADS			C654	NCS21HJ-471X	C CAPACITOR	470pF 50V J	only Europe
K560	NQR0007-002X	FERRITE BEADS			C655	NCS21HJ-471X	C CAPACITOR	470pF 50V J	only Europe
X301	NAX0566-001X	C RESONATOR			C683	NCS31HJ-331X	C CAPACITOR	330pF 50V J	
X571	NAX0550-001X	CRYSTAL			C685	QCB31HK-221Z	C CAPACITOR	220pF 50V K	only ver.J,C
OT1	GN30006-001A	SPACER		1,10,2	C686	QCB31HK-221Z	C CAPACITOR	220pF 50V K	only ver.J,C
OT1	GN30006-001A	SPACER		9	C701	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M	

MAIN BOARD

Block No. [0][2][0][0]

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
IC701	UPD789074MC-020	IC			C751	NCS31HJ-471X	C CAPACITOR	470pF 50V J	
IC702	BD4727G-X	IC			C752	NCS31HJ-471X	C CAPACITOR	470pF 50V J	
IC704	74VHCT08ASJ-X	IC			C753	NCS31HJ-471X	C CAPACITOR	470pF 50V J	
IC751	HA17558F-X	IC			C754	NCS31HJ-471X	C CAPACITOR	470pF 50V J	
IC801	PT6315-S	IC			C755	NCS31HJ-471X	C CAPACITOR	470pF 50V J	
IC802	RPM7238-H9	IR DETECT UINT			C756	NCS31HJ-471X	C CAPACITOR	470pF 50V J	
IC901	MIP2C40MP	IC			C757	QETN1EM-226Z	E CAPACITOR	22uF 25V M	
IC951	MM1565AF-X	IC	5.0V Regulator		C758	QETN1EM-226Z	E CAPACITOR	22uF 25V M	
IC952	TL431/A/-T	IC			C759	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
Q691	KRC102S-X	DIGI TRANSISTOR		only Europe	C760	NCB31HK-222X	C CAPACITOR	2200pF 50V K	
Q692	KRC102S-X	DIGI TRANSISTOR		only Europe	C761	QETN1EM-226Z	E CAPACITOR	22uF 25V M	only Europe
Q696	KRA102S-X	DIGI TRANSISTOR		only Europe	C762	QETN1EM-226Z	E CAPACITOR	22uF 25V M	only Europe
Q701	KRC107S-X	DIGI TRANSISTOR		except ver.J,C	C763	NCB31HK-152X	C CAPACITOR	1500pF 50V K	
Q751	2SC3576-JVC-T	TRANSISTOR			C764	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
Q752	2SC3576-JVC-T	TRANSISTOR			C765	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
Q753	2SC3576-JVC-T	TRANSISTOR		only Europe	C791	QETN1EM-475Z	E CAPACITOR	4.7uF 25V M	
Q754	2SC3576-JVC-T	TRANSISTOR		only Europe	C793	QETN1AM-107Z	E CAPACITOR	100uF 10V M	except Europe
Q755	KRC109S-X	TRANSISTOR			C794	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	except Europe
Q756	KRA102S-X	DIGI TRANSISTOR			C795	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
Q757	2SC2412K/RS/-X	TRANSISTOR			C797	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
Q758	KRA121S-X	DIGI TRANSISTOR		only Europe	C798	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
Q951	2SC3576-JVC-T	TRANSISTOR			C801	QER60JM-106Z	E CAPACITOR	10uF 6.3V M	
Q952	KRA104S-X	DIGI TRANSISTOR			C802	QEK1HM-475Z	E CAPACITOR	4.7uF 50V M	
Q953	2SD2264/R/-T	DIGI TRANSISTOR			C803	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
D701	1SS133-T2	SI DIODE		except ver.J,C	C804	QER60JM-476Z	E CAPACITOR	47uF 6.3V M	
D801	SLR-342VC-T	LED I.M			C805	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
D803	1SS133-T2	SI DIODE			C808	QEK1HM-475Z	E CAPACITOR	4.7uF 50V M	
D804	1SS133-T2	SI DIODE			C809	QEK1HM-476Z	E CAPACITOR	47uF 50V M	
D805	1SS133-T2	SI DIODE			C810	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
D806	1SS133-T2	SI DIODE			C811	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
D810	SLR-342MC-T	LED I.M			C902	QFZ9073-683	MM CAPACITOR	0.068uF AC250V M	except ver.J,C
D901	DI106	BRIDGE DIODE			C902	QFZ9073-473	MM CAPACITOR	0.047uF AC250V M	only ver.J,C
D902	1F4-T2	FR DIODE			C905	QCZ9079-102	C CAPACITOR	1000pF AC250V M	
					C906	QCZ9079-102	C CAPACITOR	1000pF AC250V M	
					C907	QETM2GM-476	E CAPACITOR	47uF 400V M	11,12,13,19,20,21,22,24,25,3
					C907	QETM2GM-336	E CAPACITOR	33uF 400V M	only Europe
					C907	QETM2DM-476	E CAPACITOR	47uF 200V M	only ver.J,C
					C908	QCZ0136-332Z	C CAPACITOR	3300pF 1kV K	
					C913	QCZ0136-101Z	C CAPACITOR	100pF 1kV K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C914	QEZ0598-226Z	E CAPACITOR	22uF		R774	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C915	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R775	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	only Europe
C918	QFZ9073-683	MM CAPACITOR	0.068uF AC250V M	except ver.J,C	R776	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J	only Europe
C918	QFZ9073-473	MM CAPACITOR	0.047uF AC250V M	only ver.J,C	R777	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	only Europe
C950	QEZ0592-107Z	E CAPACITOR	100uF		R778	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	only Europe
C951	QETN1EM-226Z	E CAPACITOR	22uF 25V M		R779	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	only Europe
C952	QEZ0592-108Z	E CAPACITOR	1000uF		R780	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	only Europe
C953	QETN1HM-226Z	E CAPACITOR	22uF 50V M		R782	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C954	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R783	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C955	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M		R784	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
C956	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R785	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C957	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M		R786	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C958	QEZ0529-477Z	E CAPACITOR	470uF 10V M		R787	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
C959	QETN1AM-107Z	E CAPACITOR	100uF 10V M		R788	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C960	NCF31AZ-105X	C CAPACITOR	1uF 10V Z		R790	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
C963	QEZ0594-107Z	E CAPACITOR	100uF		R791	NRSA63J-301X	MG RESISTOR	300Ω 1/16W J	
C964	QEZ0594-107Z	E CAPACITOR	100uF		R792	NRSA63J-301X	MG RESISTOR	300Ω 1/16W J	
C965	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R794	NRSA63J-820X	MG RESISTOR	82Ω 1/16W J	
C966	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R802	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	
C967	QEZ0594-337Z	E CAPACITOR	330uF		R804	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
C969	NCF31AZ-333X	C CAPACITOR	0.033uF 10V Z		R807	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C971	NCS31HJ-471X	C CAPACITOR	470pF 50V J		R808	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C972	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		R809	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C973	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M		R810	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
C974	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R811	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C975	QETN0JM-107Z	E CAPACITOR	100uF 6.3V M		R812	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C976	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R901	QRL01DJ-683X	OMF RESISTOR	68kΩ 1W J	
C977	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R903	QRE141J-181Y	C RESISTOR	180Ω 1/4W J	
C982	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R906	QRE141J-274Y	C RESISTOR	270kΩ 1/4W J	
C983	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	except Europe	R910	QRZ9037-335	COMP RESISTOR	3.3MΩ 1/2W K	except ver.J,C
C984	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	except Europe	R912	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
C988	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R913	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R2	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R915	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R602	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	except ver.J,C	R951	QRE141J-100Y	C RESISTOR	10Ω 1/4W J	
R612	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	except ver.J,C	R952	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R622	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	except ver.J,C	R953	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R632	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	except ver.J,C	R954	QRZ9005-100X	F RES I/M	10Ω	
R651	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	only Europe	R955	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
R653	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	only Europe	R956	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R655	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	only Europe	R957	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R657	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	only Europe	R960	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R670	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	only Europe	R961	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R673	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	only Europe	R962	NRSA63F-392X	MG RESISTOR	3.9kΩ 1/16W F	
R675	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	only Europe	R964	NRSA63F-103X	MG RESISTOR	10kΩ 1/16W F	
R682	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J		R966	QRE141J-470Y	C RESISTOR	47Ω 1/4W J	
R683	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J		R967	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R697	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	only Europe	R968	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R703	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	except ver.J,C	R969	QRE141J-271Y	C RESISTOR	270Ω 1/4W J	
R704	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		L601	QQL231K-2R2Y	COIL	2.2uH K	
R705	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		L611	QQL231K-2R2Y	COIL	2.2uH K	
R706	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		L612	QQL231K-2R2Y	COIL	2.2uH K	
R707	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	except ver.J,C	L613	QQL231K-2R2Y	COIL	2.2uH K	
R708	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		L681	QQL231K-1R0Y	COIL	1uH K	
R710	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	except Europe	L709	QQL231K-2R2Y	COIL	2.2uH K	except ver.J,C
R711	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		L901	QQR0816-001	LINE FILTER		
R712	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		L951	QQR1291-001Z	CHOKE COIL		
R713	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	except ver.J,C	L952	QQR1291-001Z	CHOKE COIL		
R715	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	except ver.J,C	L953	QQL531J-220Y	COIL	22uH J	
R751	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J		L954	QQL531J-220Y	COIL	22uH J	
R752	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J		L955	QQR1291-001Z	CHOKE COIL		
R755	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J		L956	QQL531J-220Y	COIL	22uH J	
R756	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J		L957	QQL231K-220Y	COIL	22uH K	
R759	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		L959	QQL231K-220Y	COIL	22uH K	
R760	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		T901	QQS0197-001	SW TRANSF		
R761	NRSA63J-201X	MG RESISTOR	200Ω 1/16W J		BK801	GN30053-001A	VFD HOLDER		
R762	NRSA63J-201X	MG RESISTOR	200Ω 1/16W J		CN601	QGB1231M1-15	CONNECTOR	B-B (1-15)	
R763	NRSA63J-201X	MG RESISTOR	200Ω 1/16W J		CN701	QGB1231M1-09	CONNECTOR	B-B (1-9)	
R764	NRSA63J-201X	MG RESISTOR	200Ω 1/16W J		CN702	QGF1016C1-19	CONNECTOR	FFC/FPC (1-19)	
R765	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		CN801	QGF1201F3-14	CONNECTOR	FFC/FPC (1-14)	
R766	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		CN802	QGF1201F3-08	CONNECTOR	FFC/FPC (1-8)	
R767	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J		CN803	QGF1201F3-08	CONNECTOR	FFC/FPC (1-8)	
R768	NRSA63J-561X	MG RESISTOR	560Ω 1/16W J		CN901	QGF1201C3-14	CONNECTOR	FFC/FPC (1-14)	
R769	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J		CN902	QGB1231M1-15	CONNECTOR	B-B (1-15)	
R770	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J		CN904	QGF1016C1-19	CONNECTOR	FFC/FPC (1-19)	
R771	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		△ CP951	ICP-N10-T	IC PROTECTOR	400mA	
R772	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		DI801	QLF0112-001	FL TUBE		
R773	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J						

<Local area>

XV-N30BK 1:J 2:C 3:UJ 4:B 5:E 6:EN 7:EV 8:EE

XV-N33SL 9:J 10:C 11:UJ 12:UW 13:UY 14:B 15:E 16:EN 17:EV 18:EE 19:US 20:UG 21:UX 22:UP 23:A 24:UF 25:UB

(No.A0039)3-11

Symbol No.	Part No.	Part Name	Description	Local
EP951	QNZ0136-001Z	EARTH PLATE		
EP952	QNZ0136-001Z	EARTH PLATE		except Europe
EP953	QNZ0136-001Z	EARTH PLATE		
FC901	QNG0003-001Z	FUSE CLIP		
FC902	QNG0003-001Z	FUSE CLIP		
J601	QNN0566-001	PIN JACK		only Europe
J601	QNN0565-001	PIN JACK		except Europe
J602	QNN0564-001	PIN JACK		
J603	QNZ0610-001	RGB CONNECTOR		only Europe
J702	QNS0221-001	3.5 JACK		except ver.J,C
J703	GP1FA352TZ	OPT TRANSMITTER		except Europe
K602	NQR0227-004X	FERRITE BEADS		except ver.J,C
K603	NQR0227-004X	FERRITE BEADS		except ver.J,C
K682	NQR0227-004X	FERRITE BEADS		
K792	NQR0227-004X	FERRITE BEADS		
P901	QGA7901C1-02	CONNECTOR	W-B (1-2)	
S801	QSW0651-001Z	TACT SWITCH		
S802	QSW0651-001Z	TACT SWITCH		
S803	QSW0651-001Z	TACT SWITCH		
S804	QSW0651-001Z	TACT SWITCH		
S805	QSW0651-001Z	TACT SWITCH		
S806	QSW0651-001Z	TACT SWITCH		
S807	QSW0651-001Z	TACT SWITCH		
S808	QSW0651-001Z	TACT SWITCH		
S901	QSW0454-001	SW		except ver.J,C
X701	QAX0756-001Z	C RESONATOR		
OT1	LV41385-010A	FUSE LABEL		except ver.J,C
OT1	GN30006-001A	SPACER	(x2)	only ver.J,C
OT2	GN30006-007A	VFD SPACER		except ver.J,C
OT2	QNN0565-PLATE	PLATE	(x2)	only ver.J,C
OT3	GN30006-007A	VFD SPACER		only ver.J,C

SWITCH BOARD


Block No. [0][3][0][0]

Symbol No.	Part No.	Part Name	Description	Local
CN1	QGF1016F3-05	CONNECTOR	FFC/FPC (1-5)	
S1	QSW1007-001	DETECT SWITCH		

<MEMO>

PACKING MATERIALS AND ACCESSORIES PARTS LIST

Block No.M4MM

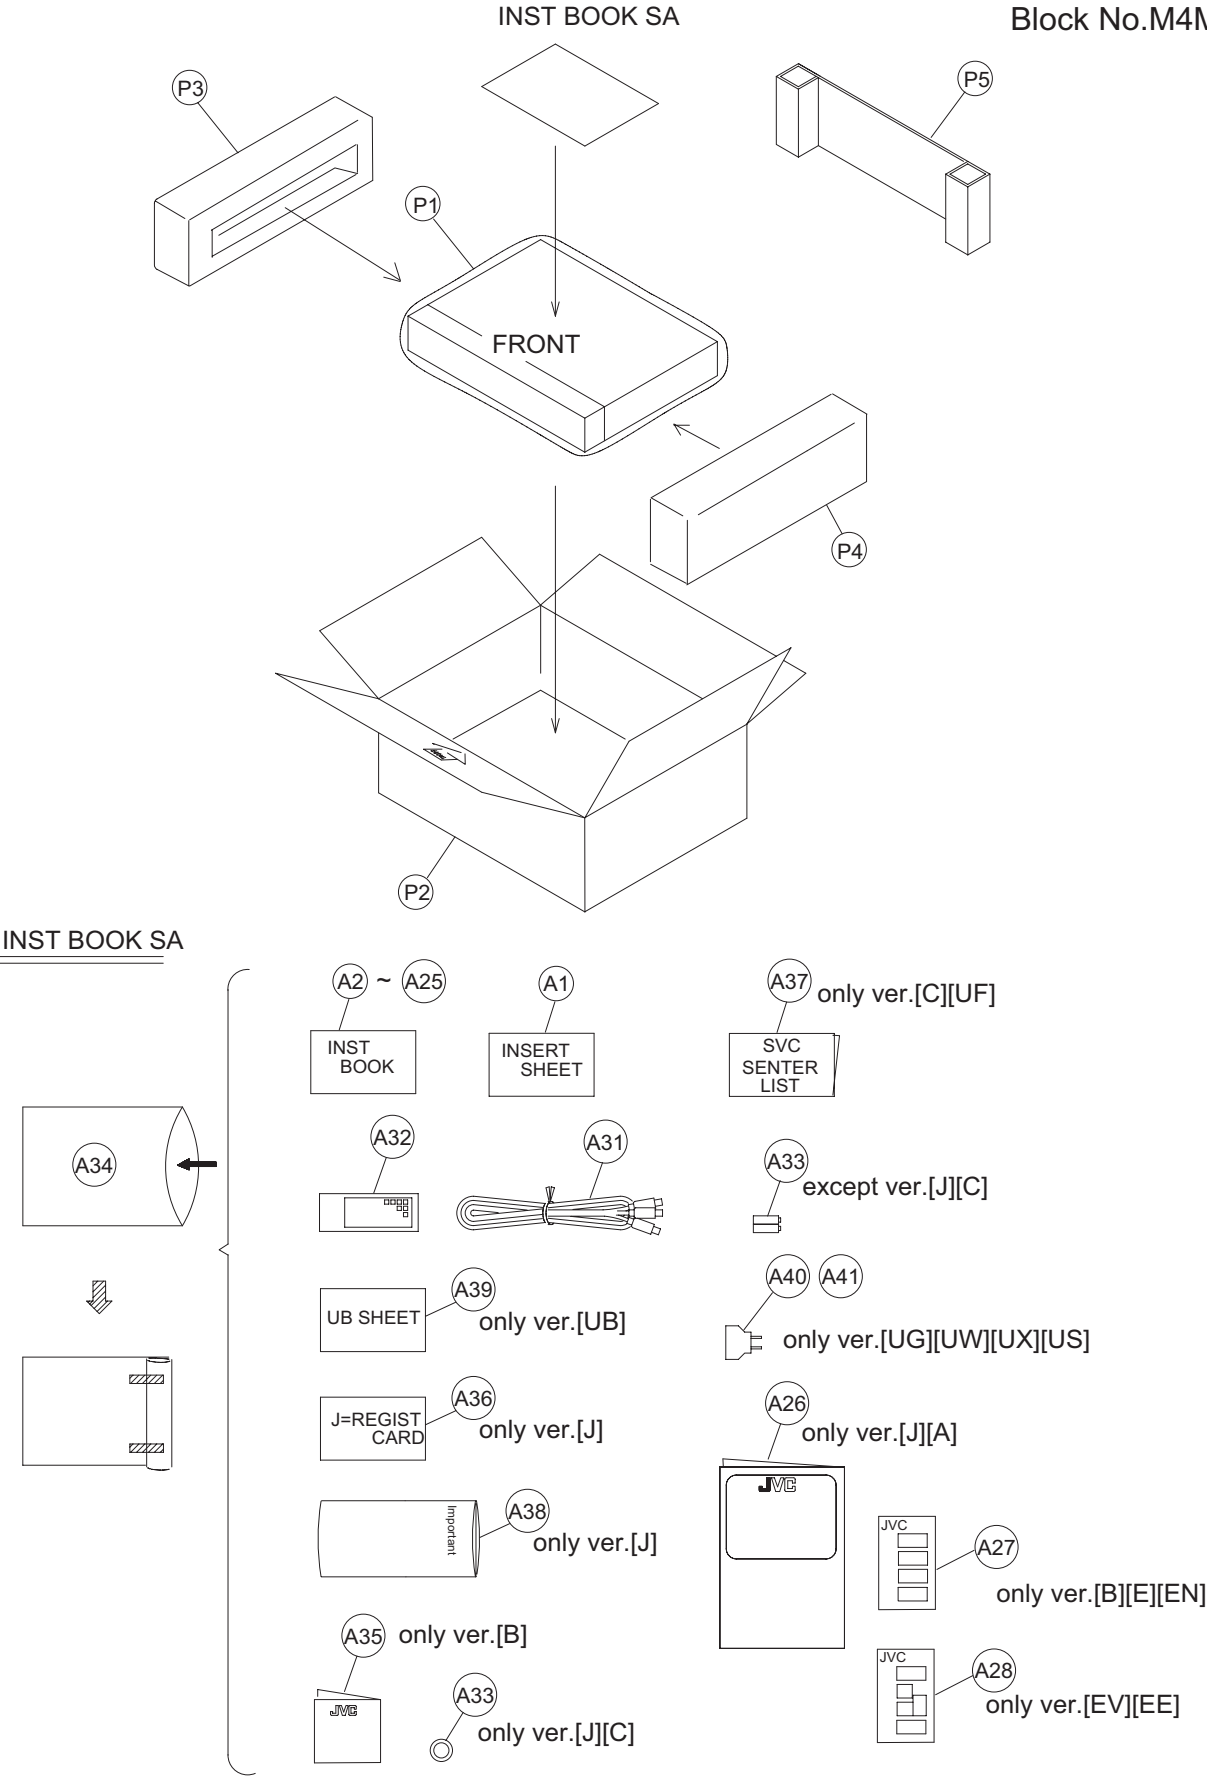

PACKING AND ACCESSORIES

Block No. [M][4][M][M]

△ Symbol No.	Part No.	Part Name	Description	Local
A 1	LE40932-005A	INSERT SHEET		11,12,13,19,20,21,22,23,24,25,3
A 1	LE40932-003A	INSERT SHEET		only ver.B,E,EN
A 1	LE40932-004A	INSERT SHEET		only ver.EV,EE
A 1	LE40932-002A	INSERT SHEET		only ver.J,C
A 2	GNT0024-001A	INST BOOK	English	1,9
A 3	GNT0024-002A	INST BOOK	English, French	10,2
A 4	GNT0024-003A	INST BOOK	English	14,4
A 5	GNT0024-007A	INST BOOK	Polish	17,7
A 6	GNT0024-008A	INST BOOK	Russian	18,8
A 7	GNT0024-009A	INST BOOK		12,13
A 8	GNT0024-010A	INST BOOK		12
A 9	GNT0024-011A	INST BOOK		19,25
A10	GNT0024-012A	INST BOOK	English	20,21
A11	GNT0024-013A	INST BOOK		22
A12	GNT0024-014A	INST BOOK		12,19,20,21,23,25
A13	GNT0024-015A	INST BOOK		24
A15	GNT0024-017A	INST BOOK	English	11,3
A16	GNT0024-018A	INST BOOK	German	15,16,5,6
A17	GNT0024-019A	INST BOOK	French	15,16,5,6
A18	GNT0024-020A	INST BOOK	Dutch	15,5
A19	GNT0024-021A	INST BOOK	Spanish	16,6
A20	GNT0024-022A	INST BOOK	Italian	16,6
A21	GNT0024-023A	INST BOOK	Swedish	16,6
A22	GNT0024-024A	INST BOOK	Finnish	16,6
A23	GNT0024-025A	INST BOOK	Danish	16,6
A24	GNT0024-026A	INST BOOK	Hungarian	17,7
A25	GNT0024-027A	INST BOOK	Czech	17,7
A26	BT-52006-1	WARRANTY CARD		10,2
A26	BT-56001-2	A=W.CARD		23
A27	BT-54008-2	W.CARD		only ver.B,E,EN
A28	BT-54012-1	W.CARD		only ver.EV,EE
A31	QAM0328-001	AV CORD 3P		
A32	RM-SXV033E	REMOCON UNIT		only XV-N33SL for Europe
A32	RM-SXV034U	REMOCON UNIT		11,12,13,19,20,21,22,23,24,25,3
A32	RM-SXV032A	REMOCON UNIT		only XV-N30BK for Europe
A32	RM-SXV031J	REMOCON UNIT		only ver.J,C
A33	-----	BATTERY	FOR EXP.(x2)	except ver.J,C
A33	-----	BATTERY		only ver.J,C
A34	QPC02504015P	POLY BAG	25cm x 40cm	
A35	VNA3000-204	REGIST.CARD		14,4
A36	BT-51028-2	J=REGIST CARD		1,9
A37	BT-20071B	SVC CENTER LIST		10,2
A37	BT-59007-2	JSC W CARD		24
A38	YU20333	SAFETY INST.		only ver.J
A39	GN30014-006A	UB SHEET		25
△ A40	QAM0060-002	AC PLUG ADAPTER		12,19,20
△ A41	QAM0027-002	CONVERSION PLUG		21
P 1	QPC06005515P	POLY BAG	FOR SET	
P 2	GN10042-013A	PACKING CASE		12
P 2	GN10043-009A	PACKING CASE		14
P 2	GN10042-010A	PACKING CASE		15,16,17
P 2	GN10042-014A	PACKING CASE		18
P 2	GN10042-011A	PACKING CASE		20
P 2	GN10042-011A	PACKING CASE		21
P 2	GN10042-012A	PACKING CASE		19,22
P 2	GN10043-008A	PACKING CASE		13,23
P 2	GN10040-003A	PACKING CASE		24
P 2	GN10043-010A	PACKING CASE		25
P 2	GN10039-003A	PACKING CASE		1,2,3
P 2	GN10043-011A	PACKING CASE		4
P 2	GN10042-015A	PACKING CASE		5,6,7
P 2	GN10042-016A	PACKING CASE		8
P 2	GN10039-001A	PACKING CASE		10,11,9
P 3	GN20050-001A	PACKING PAD(L)		24
P 3	GN20052-001A	PACKING PAD(L)		except ver.J,C,UJ
P 3	GN20048-001A	PACKING PAD(L)		only ver.J,C,UJ
P 4	GN20051-001A	PACKING PAD(R)		24
P 4	GN20053-001A	PACKING PAD(R)		except ver.J,C,UJ
P 4	GN20049-001A	PACKING PAD(R)		only ver.J,C,UJ
P 5	GN30055-001A	SHEET ASSY		13,14,23,25,4

<Local area>

XV-N30BK 1:J 2:C 3:UJ 4:B 5:E 6:EN 7:EV 8:EE

XV-N33SL 9:J 10:C 11:UJ 12:UW 13:UY 14:B 15:E 16:EN 17:EV 18:EE 19:US 20:UG 21:UX 22:UP 23:A 24:UF 25:UB