


DCV(20K Ω /V)

DCmA

Ω

ACV(9K Ω /V)

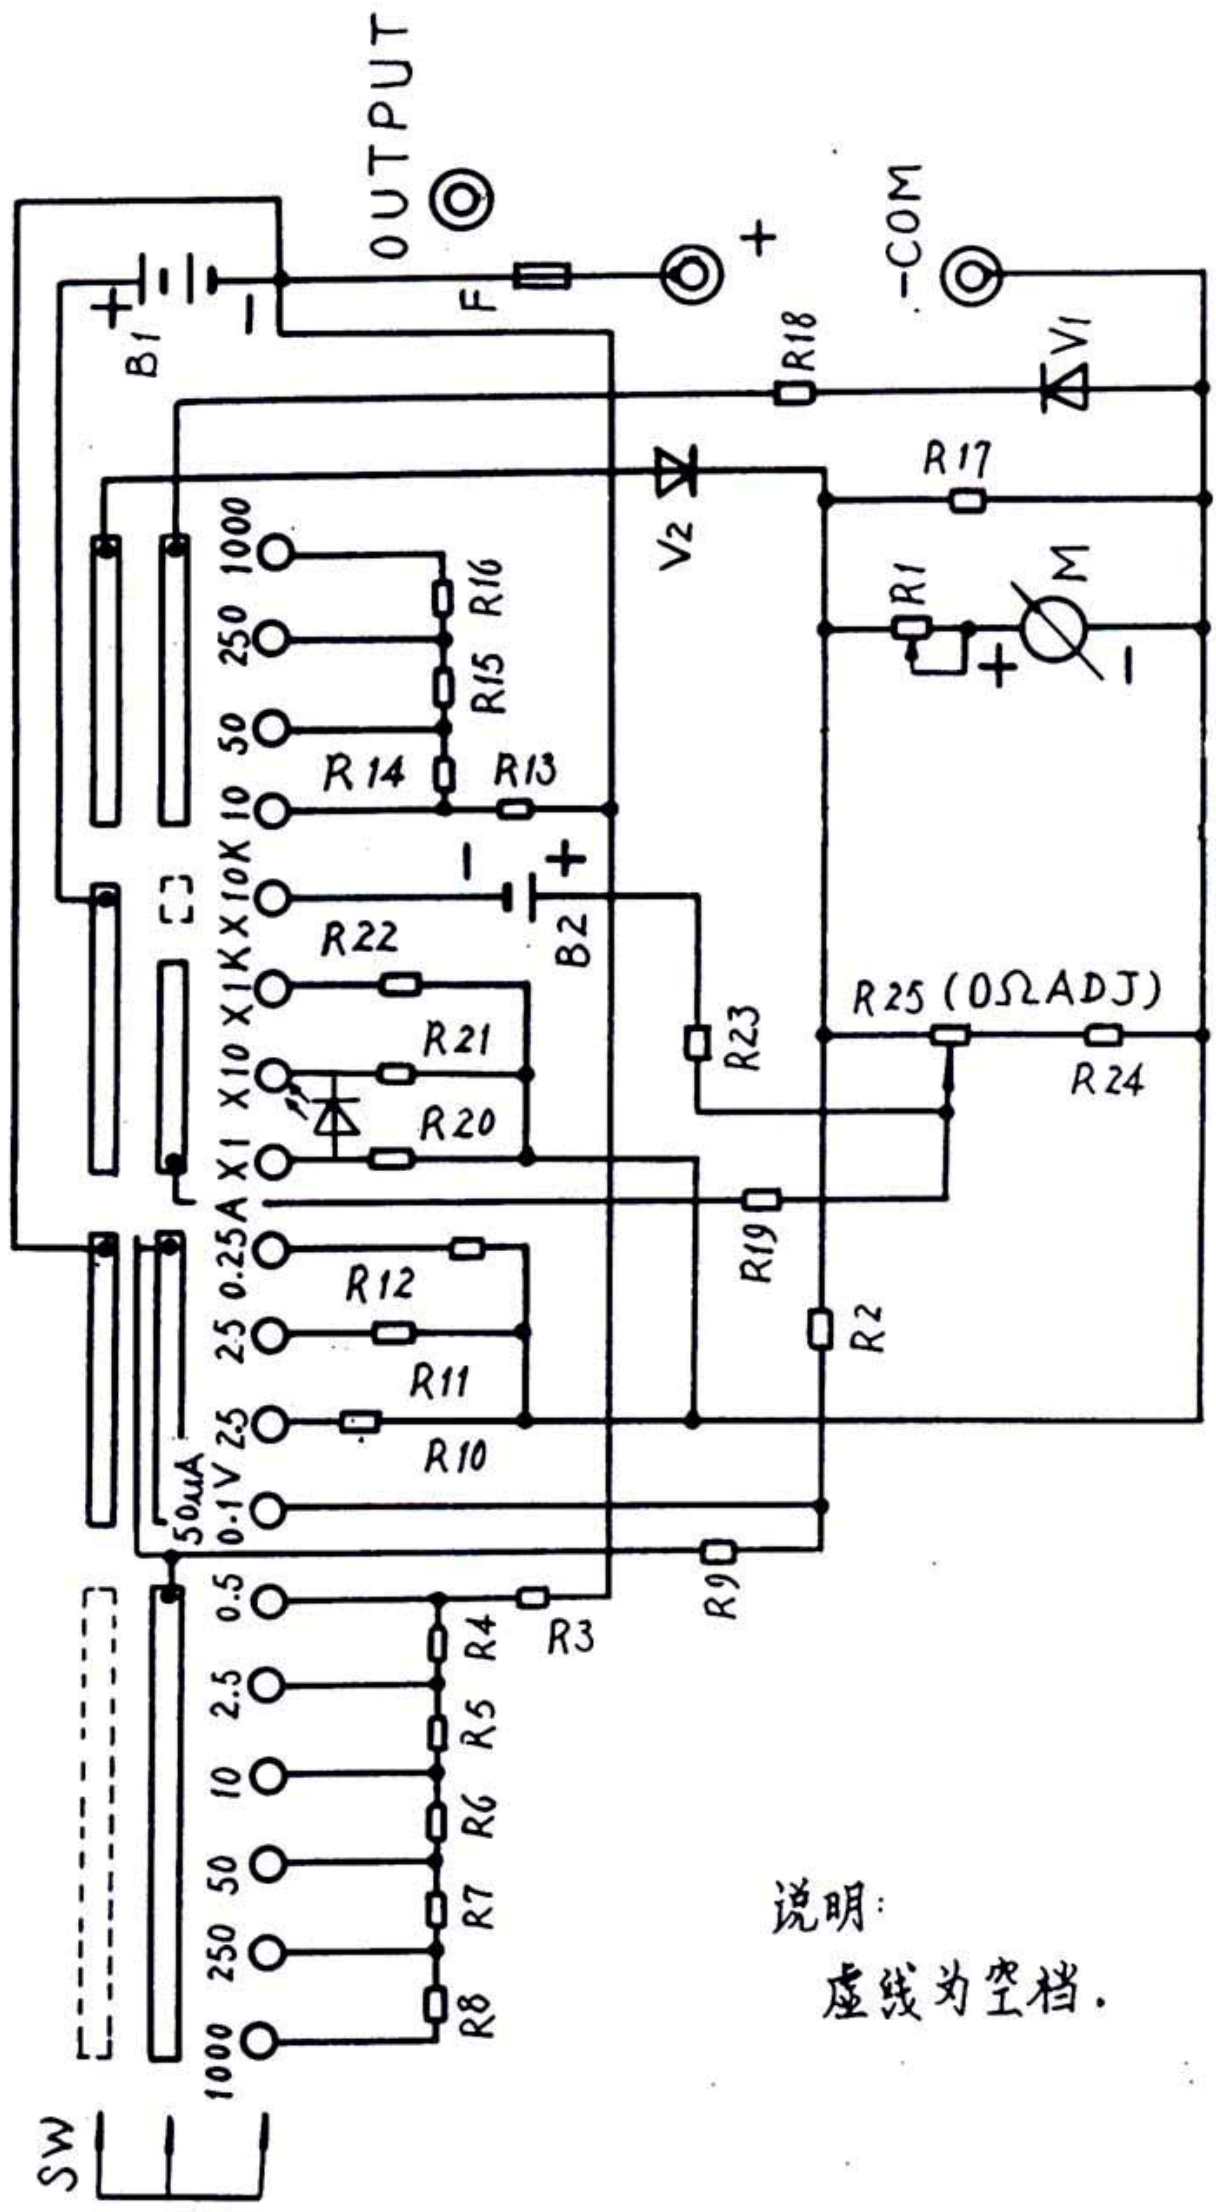

说明:

虚线为空档.

ZD1323-00	插40 稀土合金轴头	0.5×2.5×0.015	轴头	构
ZBY348-85	轴座	B ₁ -φ3.5×1.4	轴座	
GB3968-83	宝石轴承	ZM1.2×1.2×0.15×0.35	宝石轴承	
GB5873-86	电阻器	RJ14-0.25W-240Ω±1%	R2	元 器
GB5873-86		RJ14-0.25W-5KΩ±1%	R3	
GB5873-86		RJ14-0.25W-40KΩ±1%	R4	
GB5873-86		RJ14-0.25W-150KΩ±1%	R5	
GB5873-86		RJ14-0.25W-800KΩ±1%	R6	
GB7275-87		RJ15-0.5W-4MΩ±1%	R7	
GB7275-87		RJ15-0.5W-15MΩ±1%	R8	
GB5873-86		RJ14-0.25W-3KΩ±1%	R9	
GB5873-86		RJ14-0.25W-102Ω±1%	R10	
GB7275-87		RJ15-0.5W-10Ω±1%	R11	
GB7275-87		RJ15-0.5W-1Ω±1%	R12	
GB5873-86		RJ14-0.25W-83.3KΩ±1%	R13	
GB5873-86		RJ14-0.25W-360KΩ±1%	R14	
GB7275-87		RJ15-0.5W-1.8MΩ±1%	R15	
GB7275-87		RJ15-0.5W-6.75KΩ±1%	R16	
GB5873-86		RJ14-0.25W-31KΩ±2%	R17	
GB5873-86		RJ14-0.25W-2KΩ±5%	R18	
GB5873-86		RJ14-0.25W-44KΩ±2%	R19	
GB7275-87		RJ15-0.5W-18.5Ω±1%	R20	
GB7275-87		RJ15-0.5W-200Ω±2%	R21	
GB5873-86		RJ14-0.25W-34KΩ±2%	R22	
GB5873-86		RJ14-0.25W-195KΩ±2%	R23	
GB5873-86		RJ14-0.25W-18KΩ±2%	R24	
SJ2683-86	电位器	WH112-2-0.1W-680Ω	R1	件
		WH9-2-10KΩ±20%	R25	
				附注