


**SAEHAN** WITH SOLID STATE MULTITESTER **ST-360-TR**



# MODEL: ST-360TR

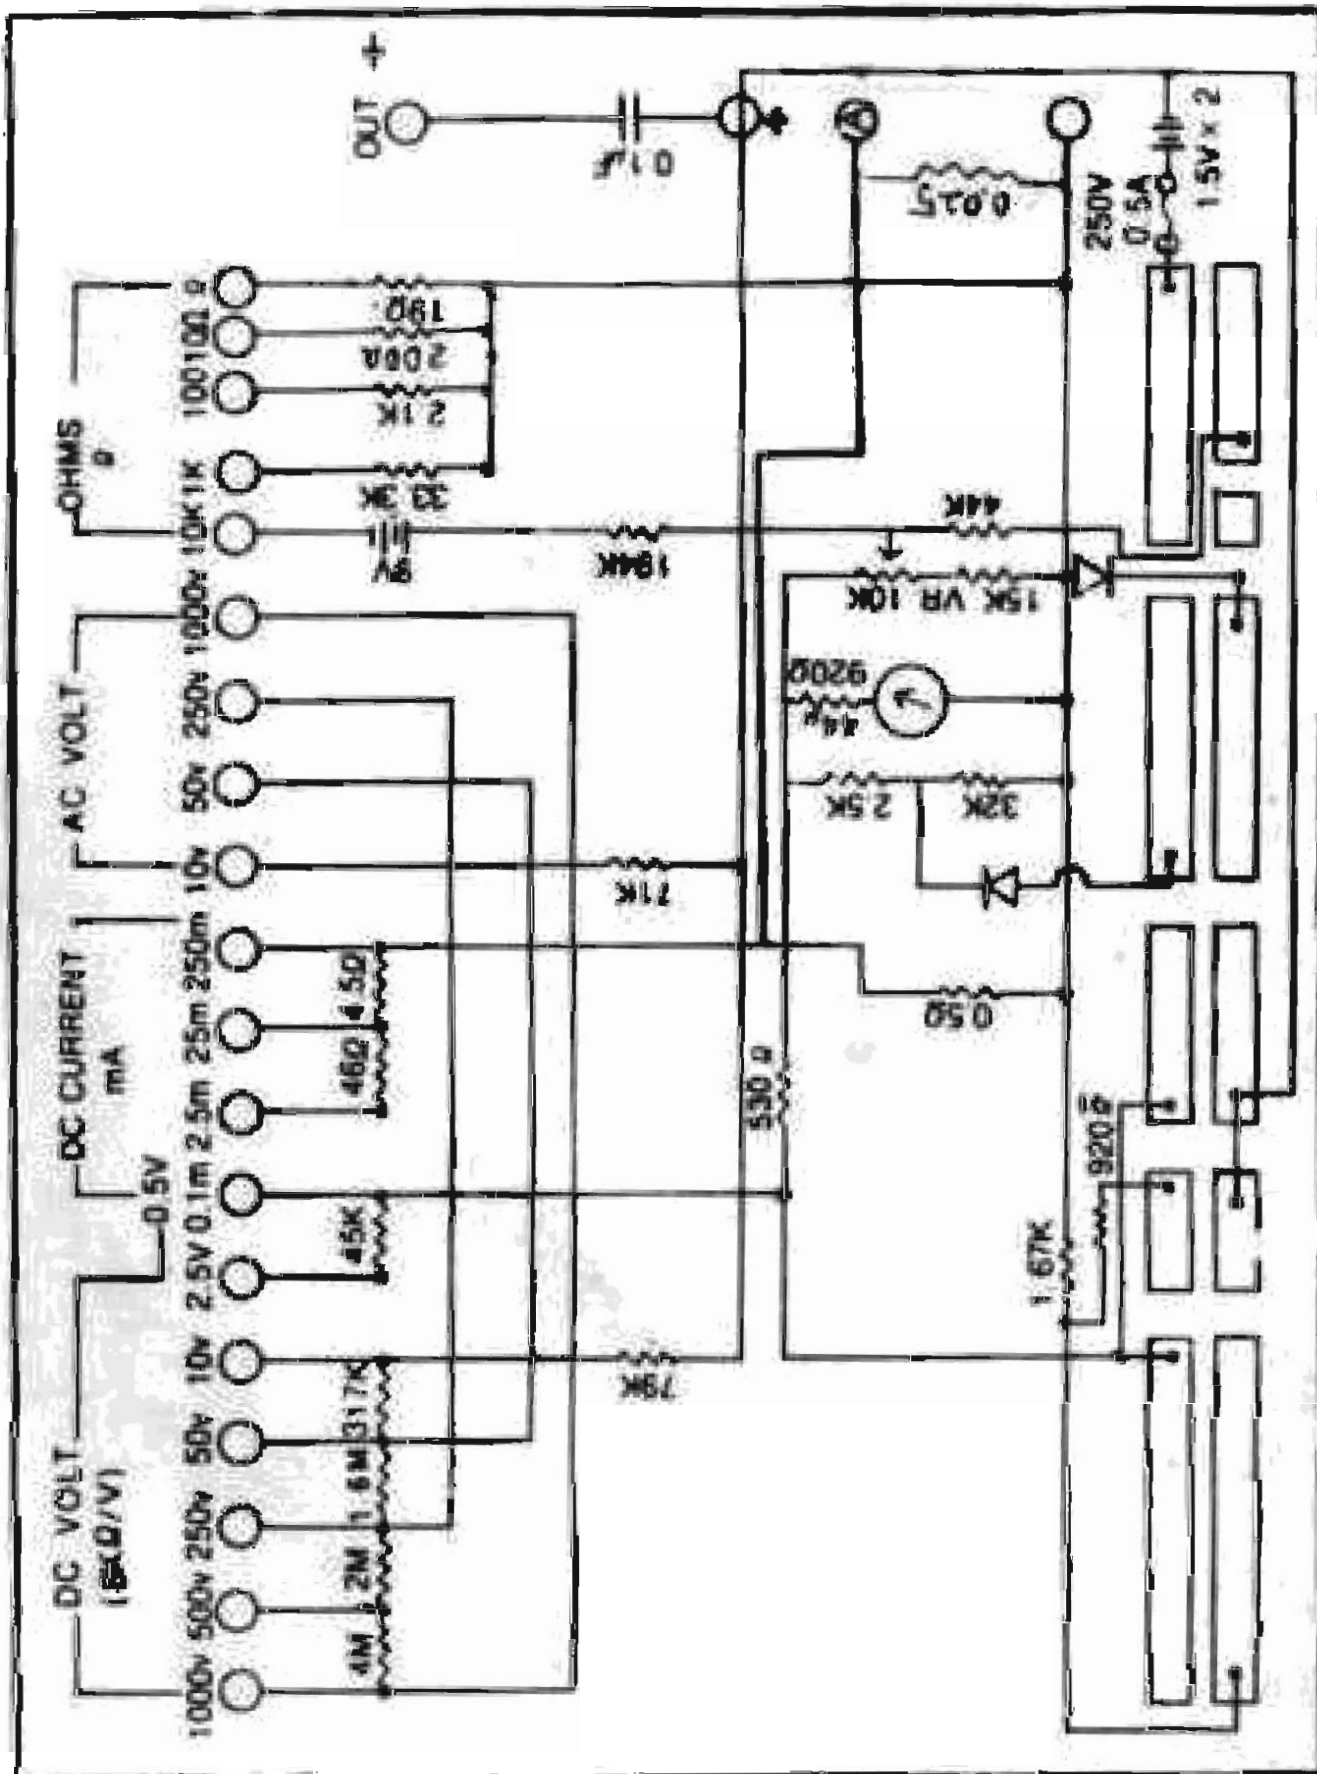

## 측정범위와 오차

# 22 MEASURING RANGES.

## DC VOLTS

Ranges	: 0.5, 2.5, 10, 50, 250, 500, 1000
Sensitivity	: 20K ohm. per volt
Rated Accuracy	: Within $\pm 4\%$ DC and $\pm 5\%$ AC of full scale on all ranges

## AC VOLTS

Ranges	: 10, 50, 250, 500, 1000
Sensitivity	: 8K ohm per volt
Indication	: Full wave average responding Calibrated in RMS for sinusoidal waveforms
Frequency Response	: Rated accuracy to 100,000 HZ on all ranges through 50v : to 20 KHZ on 250v range

## DC CURRENT

Ranges	: 0.1, 2.5, 25, 250mA 10A 10A on separate jack
Potential Drop	: 0.25v on all ranges
Rated Accuracy	: Within $\pm 5\%$ full scale all Ranges

## DC RESISTANCE

Ranges	: $R \times 1$ , 0 ~ 2000 ohm (20ohm Center) : $R \times 10$ , 0 ~ 20,000 ohm (200 ohm Center) : $R \times 100$ , 0 ~ 200K ohm (2K ohm Center) : $R \times 1K$ , 0 ~ 2M ohm (20K ohm Center) : $R \times 10K$ , 0 ~ 20M ohm (200K ohm Center)
Accuracy	: $\pm 4\%$ arc
dB Ranges	: -10 dB to 22 dB on 10 v AC range
BATT	: 1.5V $\times$ 2 9V $\times$ 1
Size	: 155 $\times$ 105 $\times$ 45mm
Weight	: 700g